


# clarion Service Manual

Published by Service Dept.

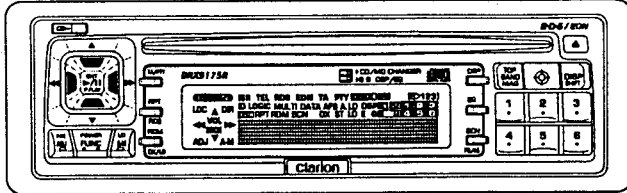

**FM/MW/LW CD PLAYER WITH RDS  
 AND CD CHANGER CONTROL**

Model **DRX9175R**  
 (PE-2105E)

## ■ SPECIFICATIONS:

### ◎ RADIO SECTION

Tuning system: PLL synthesizer  
 Receiving frequencies: FM 87.5MHz to 108MHz  
 MW 531kHz to 1,602kHz  
 LW 153kHz to 279kHz

### ◎ CD SECTION

System: Compact disc audio  
 Signal format: Sampling frequency 44.1kHz  
 8times oversampling  
 Dual 1-bit D/A converters  
 Frequency response: 5Hz to 20,000Hz(±1dB)  
 Dynamic range: 95dB(1kHz)  
 S/N ratio: 100dB(1kHz) IHF-A  
 Wow and flutter: Below measurement range  
 Distortion: 0.012%

### ◎ GENERAL

Power supply voltage: DC14.4V(10.8 to 15.6V allowable)  
 Negative ground  
 Power consumption: Less than 3A  
 Auto antenna rated  
 current: 350mA or less  
 Weight: 2.3kg  
 Dimensions: 178(W)x50(H)x152(D)mm

## ■ COMPONENTS:

### ◎ PE-2105E-B


Main unit		
Remote controller	RCB-058-300	1
Battery(CR2025BC)	—	1
Bracket(strap)	300-6954-00	1
Bracket(universal)	300-9035-01	1
DCP case	335-4848-00	1
Outer escutcheon	370-9006-00	1
Extension lead	854-3816-00	1
Parts bag	—	1
Hook plate	330-8216-01	2
Lead holder	335-0833-01	1
Clip	335-3744-00	1
Spacer	345-3653-01	1
Screw	716-0496-01	1

## ■ ADJUSTMENT:


### ● FM SECTION

Item	Procedure
S-meter	1. Connect the digital volt-meter to TP102. 2. Input the 98.1MHz/30dB(30%,400Hz)signal and adjust the level to $2.4V \pm 0.1V$ by VR101.
Stop sensitivity	1. Input the 98.1MHz/28dB(30%,400Hz)signal. 2. Connect the GND to TP103. 3. Adjust VR102 so that the voltage of TP101 is high.(or seek up tuning stops.)

### ● ADJUSTMENT POINT

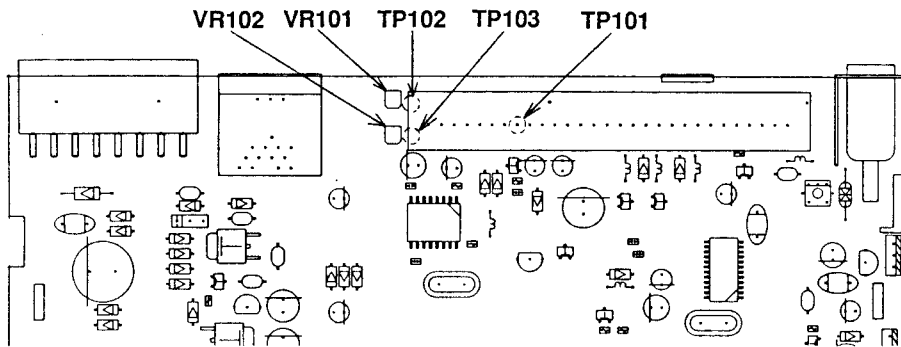


### ● CD SECTION

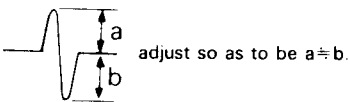
Item	Procedure
Tracking offset	1) Make sure that the power is turned off and connect the measuring instrument as indicated in the below diagram. 2) Playback the first music of SONY TYPE4. 3) Perform the manual search and check the state of TR Jump (track jump) by an oscilloscope. Adjust the tracking offset adjusting volume (VR1) so that the waveform may become symmetrical in both forward and reverse modes. 
Focus offset	1) Playback the first music in the normal mode. 2) Connect the RF OUT to the oscilloscope and adjust VR2 so that RF may be maximized and the eye pattern may be optimized.

### ● ADJUSTMENT POINT

#### ● Tracking offset

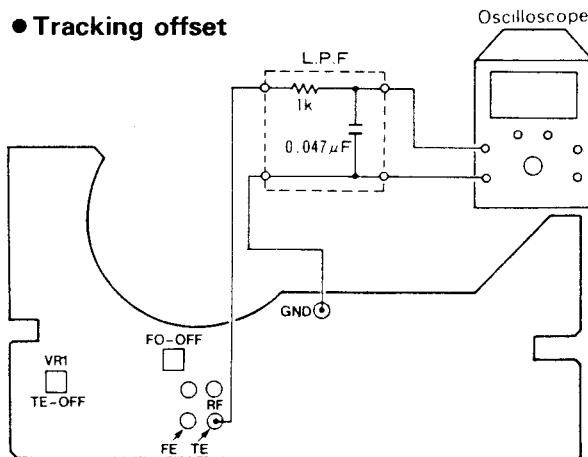

#### ● Focus offset

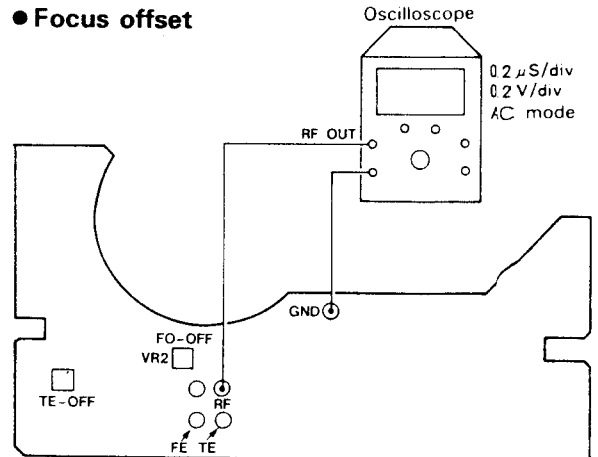

# ■ EXPLANATION OF ICs

■  $\mu$ PD78058GC-025-3B9 052-3318-00 System Controller  
 $\mu$ PD78058GC-044-3B9 052-3316-01 (Master Microcomputer)

\* 052-3318-00 and 052-3316-01 are not compatible with each other.

Outward Form  
 80-pin plastic QFP

Terminal Description  
 (052-3318-00)

No.	Symbol	I/O	Function
1 2 3	GND	-	GND terminal.
4 5 6	AV <sub>SS</sub>	-	GND terminal for A/D.
7	AVref 1	-	A/D reference voltage terminal (+ 5V).
8 9 10	SI 2 SO 2 SCK 2	-	Connected to GND.
11 12	DISP SI DISP SO	I O	Terminal to input and output data of serial bus line.
13 14 15	DISP SCK DISP RESET DISP BUSY	O O I	Terminal to input and output signal to DCP microcomputer.
16 17 18	C-BUS SI C-BUS SO C-BUS SCK	I O O	C-BUS line SI/SO/SCK terminal on master side.
19 20 21 22 23 24 25 26 27 28 29	AD 0 AD 1 AD 2 AD 3 AD 4 AD 5 AD 6 AD 7 A B A 8 A 9 A 10	I/O O	Address/data bus for SRAM interface.
30	NC	-	Not in use.
31	SRQ	I	C-BUS line SRQ terminal on master side.
32	ACC CONT	O	ACC controlling terminal of serial bus line.
33	V <sub>SS</sub>	-	GND terminal.
34	ILLUMI 1	O	"H" is outputted in the case of AMBER.
35	ILLUMI 2	O	"H" is outputted in the case of GREEN.
36	ACC REM	O	Terminal to control ON/OFF of 5V system power supply (ACC 5V).
37	REM + B	O	Terminal to control ON/OFF of + B (audio system) power supply.
38	MUTE	O	Terminal to output SYSTEM MUTE signal.
39	BLINK LED	O	BLINKING LED terminal.
40	RD	O	Strobing terminal for SRAM lead.
41	WR	O	Strobing terminal for SRAM light.
42	CE	O	Terminal to enable SRAM chip.
43	ASTB	O	Latch terminal for SRAM light.
44 45	GND	-	GND terminal.
46 47 48	EVOL CLK EVOL DATA EVOL CE	O	Terminal to transfer serial data to electric volume.
49	PHONE INT	I	Terminal to input interruption signal from telephone.
50 51 52 53	GND	-	GND terminal.

Note: Only new microcomputers are described here.

Pin No.	Symbol	I/O	Function															
54 55	MOTOR - MOTOR +	O	Terminal to control direction of motor revolution of flap. <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>MOTOR +</th> <th>MOTOR -</th> <th>Direction of flap movement</th> </tr> </thead> <tbody> <tr> <td>H</td> <td>H</td> <td>Brake</td> </tr> <tr> <td>H</td> <td>L</td> <td>In the direction of OPEN</td> </tr> <tr> <td>L</td> <td>H</td> <td>In the direction of CLOSE</td> </tr> <tr> <td>L</td> <td>L</td> <td>—</td> </tr> </tbody> </table>	MOTOR +	MOTOR -	Direction of flap movement	H	H	Brake	H	L	In the direction of OPEN	L	H	In the direction of CLOSE	L	L	—
MOTOR +	MOTOR -	Direction of flap movement																
H	H	Brake																
H	L	In the direction of OPEN																
L	H	In the direction of CLOSE																
L	L	—																
56	REM MOTOR	O	Flap block battery ON/OFF control terminal. Flap power ON: H															
57	DR SENC	I	Input terminal to detect opening and closing of cassette door. Pack in : "H" No pack : "L"															
58	OPEN SENC	I	Terminal to detect opening of flap.															
59	CLOSE SENC	I	Terminal to detect closing of flap.															
60	RESET	I	Terminal to input reset signal.															
61	DISP REQ	I	Terminal to input REQ signal from DCP microcomputer.															
62	B/U	I	Input terminal for BACK UP detection.															
63	ACC IN	I	Input terminal for ACC ON/OFF detection. "H" at ACC ON. "L" at ACC OFF.															
64	EJECT	I	Input terminal for EJECT key detection. The terminal turns "H" when key is pressed.															
65	ILLUMI DET	I	Input terminal for ILLUMI detection.															
66	DCP IN	I	Input terminal for DCP detection. The terminal turns "L" when DCP is detected.															
67	FUNCTION	I	Input terminal for power (function) SW detection. The terminal turns "L" when FUNCTION SW is ON.															
68	V <sub>DD</sub>	-	Power supply voltage terminal (+ 5V).															
69 70	X 2 X 1	-	System clock terminal.															
71	V <sub>SS</sub>	-	GND terminal.															
72	NC	-	Not in use.															
73	SELF CHECK	I	Terminal for SELF CHECK.															
74	AV <sub>DD</sub>	-	A/D power supply voltage terminal (+ 5V).															
75	AVref 0	-	A/D reference voltage terminal (0V).															
76 77 78 79 80	GND	-	GND terminal.															

## Differences (052-3316-01)

Pin No.	Symbol	I/O	Function
50	BEEP	O	BUZZER output terminal which sends signal to turns the buzzer on.
51 52 53 54 55 56 57 58	NC	-	Not in use.
59	2105/2106	I	Terminal for input of PE-2105/PE-2106 selector signal. "H" in PE-2105 mode.
76	TEMP	O	The terminal judges high temperature when input voltage drops below 2.46V.

**Outward Form**

64-pin plastic QFP

**Terminal Description**

No.	Symbol	I/O	Function
1	SD UP	O	Output when measuring a PLL setting IF count.
2	LPF CONT	O	PLL low-pass filter control terminal.
3	RDS MUTE	O	"H" is output for 1 second both at power (POWER & ACC)-on and AM to FM band switching.
4 5 6 7	OUT 1 OUT 4	O	"H"/"L" is simply output by receiving an arbitrary command from the master.
8	NC	-	Not in use.
9	GND	-	GND terminal.
10 11 12 13 14 15 16 17	SRAM AD 0 SRAM AD 7	I/O	SRAM control. Address & data line. Port commonly used for the lower 8-bit address and 8-bit data.
18 19 20	SRAM A 8 SRAM A 10	O	SRAM control. Address line. Upper 3-bit address output only port.
21	NC	-	Not in use.
22	SRAM CE	O	SRAM control chip enable. "L" output at any time while the power (POWER & ACC) is turned on.
23	S CW	I	Initial setting CW detection enable ("H")/disable ("L").
24	GND	-	GND terminal.
25	S RDS IC	I	Initial setting RDS-IC selection. PHILIPS ("H")/SANYO ("L"). Disabled when RDS ID signal is at "H" and enabled at "L".
26	S SD UP	I	Initial setting SD UP enable ("L")/disable ("H").
27	SRQ	O	C-BUS communication SRQ output.
28	NC	-	Not in use.
29	REM	O	Remote signal output. "L" output at any time while the power (POWER & ACC) is turned on.
30	R MUTE	O	RADIO MUTE output. MUTE ON at "L". Turn on when changing the reception frequency.
31	SRAM RD	O	SRAM control. Data read signal. "L" output when executing a data read instruction from the SRAM.
32	SRAM WR	O	SRAM control. Data write signal. "L" output when executing a data write instruction to the SRAM.
33	AM SD	I	AM band. With-station detection signal input.
34	SRAM ASTB	O	SRAM control timing signal. Always output by effecting the memory expansion mode.
35	RESET	I	Microcomputer reset signal.
36	INITIAL AM SD	I	Initial setting AM band SD detection. Yes ("H")/No ("L") designation. "H" : Performs SD detection.
37	ACC CONT	I	ACC signal (Terminal interrupt). "H" at ACC ON. "L" at ACC OFF.
38	RDS IC CLK	I	RDS IC communication. Clock input. (Terminal interrupt)
39	IF MUTE	O	IF MUTE terminal.
40	VDD	-	Supply voltage terminal.
41 42	XTAL	I	Main clock oscillator (8.38 MHz) connection terminal.
43	GND	-	GND terminal.
44	NC	-	Not in use.
45	ST ID	I	Stereo signal input. Stereo ("L")/monaural ("H").
46	A GND	-	A/D converter GND terminal.

No.	Symbol	I/O	Function
47	S Meter	I	Electric field intensity (S meter) input (A/D conversion).
48	CW	I	CW (carrier) signal input (A/D conversion). Only when initial setting CW detection is enabled.
49	SD	I	Station enable detection signal input.
50	RSD ID	I	RDS station recognition signal input. RDS station ("L").
51	SK ID	I	ARI station SK signal input. SK-ON ("L").
52	DK ID	I	ARI station DK signal input. DK-ON ("L").
53	RDS IC DATA	I	RDS IC communication data input. The port is read directly at clock interrupt time.
54	NC	-	Not in use. (+ 5V pullup or GND)
55	AVDD	-	A/D converter supply power.
56	A VREF	I	A/D converter reference voltage input.
57	PLL DI	I	PLL IC serial communication data input. Takes in the IF count data.
58	PLL DO	O	PLL IC serial communication data output. Sets the frequency divider, general purpose port data, etc.
59	PLL CLK	O	PLL IC serial communication clock output. Clock frequency: 524 kHz.
60	PLL CE	O	PLL IC serial communication chip enable output.
61	NC	-	Not in use.
62	C-BUS SBI	I	C-BUS communication data input.
63	C-BUS SBO	O	C-BUS communication data output.
64	C-BUS SCK	I	C-BUS communication clock input. The dock frequency depends on the master microcomputer.



μPD78058GC-038-3B9 052-7006-01 Microcomputer for  
 ■ μPD78058GC-039-3B9 052-7007-01 indications  
 μPD78058GC-040-3B9 052-7009-01

\* The above-mentioned models are different in destination and functions mounted. They are not compatible with each other.

**Outward Form**

80-pin plastic QFP

**Terminal Description**

Pin No.	Symbol	I/O	Function
1 3	NC	-	Not in use.
4	V <sub>SS</sub>	-	GND terminal.
5	DISP REQ	I	Terminal to input REQ signal from master microcomputer.
6	NC	-	Not in use.
7	AVref 1	-	D/A reference voltage terminal.
8 9	BB RX BB TX	I O	Terminal to transmit and receive start/stop of synchronous communications.
10	NC	-	Not in use.
11 12 13	M DISP SI M DISP SO M DISP SCK	O I I	Terminal to input and output bus line data to master side.
14 18	NC	-	Not in use.
19 26	D 0 D 7	O	Terminal to output data to LCD driver.
27 35	NC	-	Not in use.
33	V <sub>SS</sub>	-	GND terminal.
36 39	KO 0 KO 3	O	Terminal to output key scan signal.
40	RD	O	Strobing terminal for LCD driver lead.
41	WR	O	Strobing terminal for LCD driver light.
42	AO	O	Terminal to output data to LCD driver.
43	CS	O	Chip selection terminal for LCD driver.
44 51	NC	-	Not in use.
52 57	KI 0 KI 5	I	Terminal to input key scan signal.
58 59	NC	-	Not in use.
60	RESET	I	Terminal to input reset signal.
61	REMOCON	I	Terminal to input data from remote controller.
62	NC	-	Not in use.
63	BB REQ	O	Terminal to call for communication permission.
64	BUSY	I	Terminal to input signal from master side.
65 67	NC	-	Not in use.
68	V <sub>DD</sub>	-	Power supply terminal (+5V).
69 70	X 2 X 1	-	System clock terminal (4.19 MHz).

Pin No.	Symbol	I/O	Function
71 73	V <sub>SS</sub>	-	GND terminal.
72	NC	-	Not in use.
74	AV <sub>DD</sub>	-	DA power supply voltage terminal.
75	AVref 0	-	DA reference voltage terminal.
76 80	NC	-	Not in use.

**Key Matrix Table**

Note) Some of the sets equipped with this microcomputer are not provided with all the above keys.

KEY IN / KEY OUT	KI 0 (52 pin)	KI 1 (53 pin)	KI 2 (54 pin)	KI 3 (55 pin)	KI 4 (56 pin)	KI 5 (57 pin)
KO 0 (36 pin)	ADJ		A-M	DSP	EQ	RDM
KO 1 (37 pin)	V-DW	S-UP	SCN	4	5	6
KO 2 (38 pin)	V-UP	S-DW	RPT	1	2	3
KO 3 (39 pin)		ENT	ISR TA/PTY (*1)	BAND	DISP	

(\*1) Key specification depends on the destination.  
 Japan, North America and : ISR (PE-9910)  
 the third area  
 Europe : TA/PTY (PE-9901, 2105)

**PARTS LIST:**

Note) Several different parts listed in the column are alternative parts. One of those parts is used in the set.

**SWITCH PWB**

REF NO.	PART NO.	DESCRIPTION	QTY	REF NO.	PART NO.	DESCRIPTION	QTY
C101,103	042-0397-00	CHIP-C 16V 1 μF TAN	2	IR101	060-0321-00	IR-RECEIVER	1
C109	042-0406-01	CHIP-C 6.3V 47 μF TAN	1	X101	060-1009-00	CERA-RESONATOR*4.195MHz	1
C110	042-0416-02	CHIP-C 10V 10 μF TAN	1	C104-108	178-1042-78	CHIP-C 0.1 μF	5
IC101	051-6010-00	IC SED1526FOA	1	C111	178-2232-78	CHIP-C 0.022 μF	1
IC102	052-7009-01	IC μPD78058GC-040-3B9	1				

**MAIN PWB**

REF NO.	PART NO.	DESCRIPTION	QTY	REF NO.	PART NO.	DESCRIPTION	QTY
D402	001-0188-01	DIODE 1S1885A	1	Q412,413	108-0241-50	FET 2SK241	2
D102,105,106,201 303-305,408,410 411,501,502	001-0330-00	DIODE 1SS119	12	Q312	125-0002-03	TR RN2403	1
D301	001-0356-00	DIODE 1SS184	1	Q110	125-0002-06	TR RN2406	1
D101	001-0366-00	DIODE LTZMR15	1	Q101,102,108,109 111,309,313,314 403,407,502	125-2004-03	TR RN1403	11
D405	001-0377-41	DIODE MA4075M	1	Q310,405,415	125-2004-06	TR RN1406	3
D404,407	001-0377-46	DIODE MA4091L	2	R411	032-0108-00	FUSE-R 1/4W 1.8 Ω	1
D406	001-0377-48	DIODE MA4091H	1	R423	114-2201-11	FILM-R 1W 22 Ω	1
D103,104	001-0378-00	DIODE 1SV125	2	C501	172-1031-11	POLY-C 0.01 μF	1
D409	001-0466-00	DIODE S5688B	1	C219,227,411	172-1041-11	POLY-C 0.1 μF	3
D302	001-0659-00	LED SLP-181B-51	1	C401	172-4731-11	POLY-C 0.047 μF	1
TH301	002-0212-00	THERMISTOR	1	C116	172-6831-11	POLY-C 0.068 μF	1
T401	009-0618-00	CHOKE	1	C209,210	173-1521-11	POLY-C 1500pF	2
L301	010-2198-56	COIL*2.2 μH	1	C222,230	173-1821-11	POLY-C 1800pF	2
L101	010-2230-00	COIL*0.15 μH	1	C220,228	173-2721-11	POLY-C 2700pF	2
L103	010-2230-14	COIL*2.2 μH	1	C119-122,133,134 310,314,415	176-1011-00	CHIP-C 100pF	9
L104,105	010-2230-26	COIL*22 μH	2	C124	176-1501-00	CHIP-C 15pF	1
L108	010-2230-30	COIL*47 μH	1	C125	176-1801-00	CHIP-C 18pF	1
L107	010-2230-38	COIL*220 μH	1	C211,212	176-2211-00	CHIP-C 220pF	2
L102	010-4007-00	COIL	1	C112	176-4701-00	CHIP-C 47pF	1
VR102	012-5123-06	VARIABLE-R*10K	1	C111	176-8201-00	CHIP-C 82pF	1
VR101	012-5123-15	VARIABLE-R*470K	1	C135,302,303,312 403	178-1022-78	CHIP-C 1000pF	5
IC402	051-0869-05	IC MB3771PF(-G)	1	C126,127,304,308	178-1032-78	CHIP-C 0.01 μF	4
IC105,303	051-1046-46	IC LC3517BML-12	2	C113,132,414	178-1042-78	CHIP-C 0.1 μF	3
IC104,304	051-1051-05	IC TC74HC573AF	2	C117	178-1532-78	CHIP-C 0.015 μF	1
IC204,205	051-1292-00	IC NJM4565M	2	C101,103,104,129 130,311,313,404	178-2232-78	CHIP-C 0.022 μF	8
IC103	051-1819-00	IC SAA6579T	1	C107	178-3312-78	CHIP-C 330pF	1
IC501	051-1841-05	IC TC7SU04F	1	C115	178-3332-78	CHIP-C 0.033 μF	1
IC401	051-3201-00	IC AN77L06	1	C102,105	178-4712-78	CHIP-C 470pF	2
IC201	051-5004-00	IC CXA1946Q	1	C307	178-4732-78	CHIP-C 0.047 μF	1
IC102	051-6201-00	IC LC72146M	1	C110,205,206	178-5612-78	CHIP-C 560pF	3
IC302	051-7400-06	IC HD74LS07FP	1	C406,408	042-0452-01	ELEC-C 10V 220 μF	2
IC101	052-1301-10	IC μPD78014GC-641-AB8	1	C305	042-0458-06	ELEC-C 10V 22 μF	1
IC301	052-3316-01	IC μPD78058GC-044-3B9	1	C306	042-0467-00	D-LAYER-C 5.5V 0.1F	1
SUP101	060-0122-10	SURGE PROTECTOR	1	C118,235,413	183-1053-61	ELEC-C 50V 1 μF	3
X301	060-0130-50	CERA-RESONATOR*4.19MHz	1	C223,225,231,233 237,243,405,407	183-1063-31	ELEC-C 16V 10 μF	8
X101	060-0320-50	CERA-RESONATOR*8.38MHz	1	C409,410	183-1073-21	ELEC-C 10V 100 μF	2
X102	061-1066-00	CRYSTAL*7.2MHz	1	C108,114	183-2253-61	ELEC-C 50V 2.2 μF	2
X103	061-3013-00	CRYSTAL-OSC*4.33MHz	1	C221,229	183-2263-11	ELEC-C 6.3V 22 μF	2
Q104,105,311,406 501	100-1162-00	TR 2SA1162	5	C238,239,241,242	183-2263-31	ELEC-C 16V 22 μF	4
Q410,414	100-1298-00	TR 2SA1298	2	C201-203,217,218 309	183-4753-51	ELEC-C 35V 4.7 μF	6
Q402	101-1143-00	TR 2SB1143	1	C109,123,128,236 301,402	183-4763-11	ELEC-C 6.3V 47 μF	6
Q404	101-1243-00	TR 2SB1243	1	C224,232	183-6843-62	ELEC-C 50V 0.68 μF	2
Q305,306,416,417	102-2712-00	TR 2SC2712	4	C412	184-4773-32	ELEC-C 16V 470 μF	1
Q106,107	102-2712-51	TR 2SC2712G,L	2				
Q103,201-206,307 308	103-1306-00	TR 2SD1306	9				
Q408	103-2012-00	TR 2SD2012	1				
Q409,411	103-2118-00	TR 2SD2118	2				

**OCD SUB PWB**


REF NO.	PART NO.	DESCRIPTION	QTY	REF NO.	PART NO.	DESCRIPTION	QTY
D601,602	001-0528-32	DIODE MA8056-M	2	C208,211,212 303-305,502	178-1032-78	CHIP-C 0.01 μF	7
IC303	051-0858-05	IC TC74HC02AF	1	C104,105,108,201 202,204,207,214 216,218,302,306 401403	178-1042-78	CHIP-C 0.1 μF	14
IC501	051-1014-05	IC TA7291F	1	C210	178-1522-78	CHIP-C 1500pF	1
IC301	051-6003-05	IC MPC1730M	1	C209	178-4732-78	CHIP-C 0.047 μF	1
IC302	051-6004-05	IC MPC1732M	1	C213	042-0397-03	CHIP-C 25V 0.47 μF TAN	1
IC101	051-6304-15	IC MN6479A	1	C206,215,217,219 402	042-0403-01	CHIP-C 16V 10 μF TAN	5
IC201	051-6305-00	IC CXD2515Q	1	C103,106,109	042-0472-00	CHIP-C 10V 47 μF TAN	3
IC401	052-5006-00	IC μPD78002BGC-621-AB8	1	C602,604	163-1063-30	CHIP-C 16V 10 μF	2
X401	060-0322-00	CERA-RESONATOR	1	C301,601,603	163-1073-10	CHIP-C 6.3V 100 μF	3
X101	061-1087-50	CRYSTAL*16.9344MHz	1	C110,111	163-2263-30	CHIP-C 16V 22 μF	2
Q601,602	103-1754-64	TR 2SD1754A	2	C501	163-3363-20	CHIP-C 10V 33 μF	1
Q401,604	125-0002-02	TR RN2402	2				
Q603	125-2004-02	TR RN1402	1				
C101,102,112	176-1201-00	CHIP-C 12pF	3				
C203,205	176-2211-00	CHIP-C 220pF	2				
C107,113	178-1022-78	CHIP-C 1000pF	2				

# EXPLODED VIEW - PARTS LIST:

○ Main section


NO	PART NO.	DESCRIPTION	QTY
1	947-0385-00	KNOB ASSY	1
2	940-1708A	DCP ASSY	1
3	940-1712A	INNER-ES-ASSY	1
4	947-0389-00	BUTTON ASSY	1
5	880-2076A	MW/LW/FM TUNER	1
6	285-1426-00	GUIDE LABEL	1
7	285-1340-00	GUIDE LABEL	1
8	750-2796-01	SPRING	2
11	714-3006-81	MACHINE SCREW	1
14	373-0773-03	DIAL-CVR	1
15	378-0134-00	BADGE	1

NO	PART NO.	DESCRIPTION	QTY
16	335-4847-00	IR FILTER	1
17	370-9004-01	ESCUTCHEON	1
18	382-7665-00	BUTTON*RELEASE	1
19	335-4846-00	PUSH PLATE	4
20	750-3172-00	SPRING	4
21	750-3149-00	SPRING	1
22	331-0587-20	SPRING HOLDER	1
23	335-4844-00	ILLUMI PLATE*DISC	1
24	382-7664-00	BUTTON*RPT/RDM	6
25	347-5125-00	FILM HOLDER*LEFT	1
26	347-5126-00	FILM HOLDER*RIGHT	1

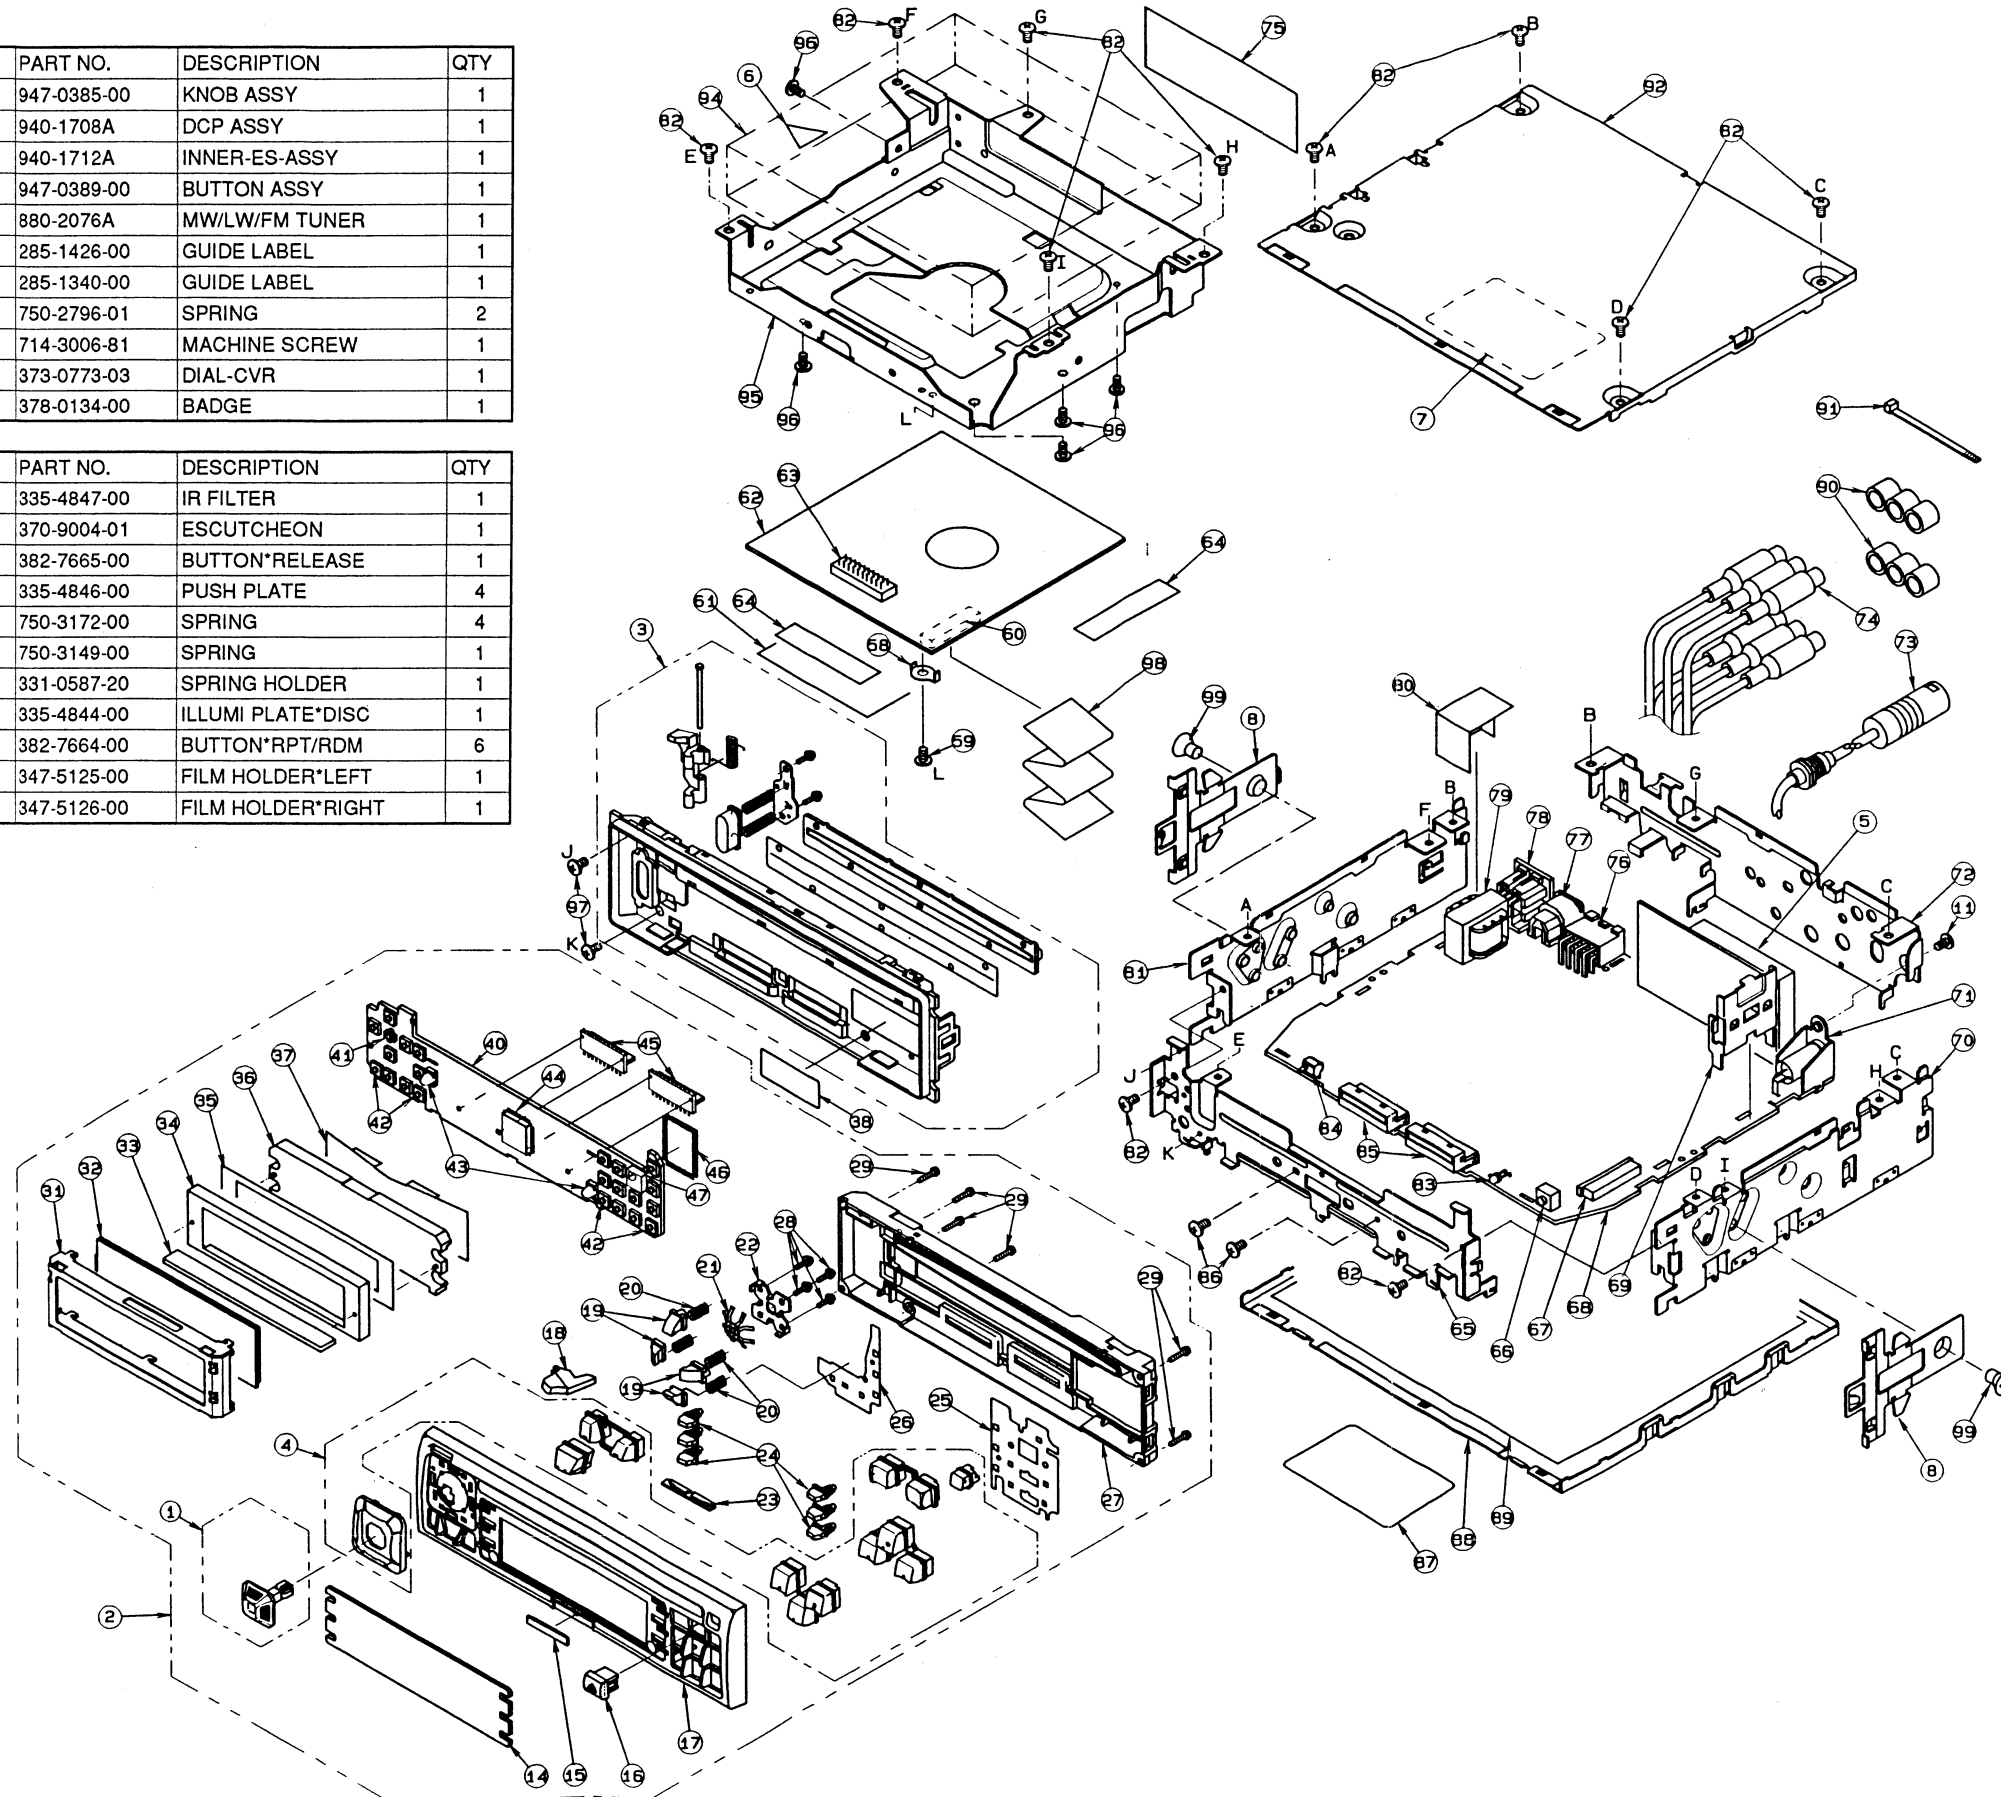

NO	PART NO.	DESCRIPTION	QTY
27	335-4850-00	REAR-CVR	1
28	716-0778-00	WAVE SCREW	4
29	716-1721-00	P-TIGHT-SCREW	6
31	331-0592-00	LCD-COVER	1
32	379-1032-71	INDICATOR	1
33	345-7646-00	RUBBER CONNECTOR	1
34	347-5115-00	FILM	1
35	347-5117-00	FILM	1
36	335-4857-00	ILLUMI PLATE	1
37	347-5116-00	REFLECTOR	1
38	291-0071-00	STICKER*SECURITY	1
40	039-0434-00	PWB	1
41	013-6501-02	SWITCH	1
42	013-6501-01	SWITCH	22
43	017-0438-55	PILOT LAMP	2
44	051-6010-00	IC*LCD DRIVER	1
45	076-0504-00	PLUG	2
46	052-7009-01	IC*uPD78058	1
47	060-0321-00	IR-RECEIVER	1
58	073-0731-00	TERMINAL	1
59	731-2605-81	TAPTIGHT	1
60	074-1052-22	OUTLET SOCKET	1
61	347-5120-00	INSULATOR	1
62	039-0435-00	CD SUB PWB	1
63	076-0507-24	PLUG	1
64	347-5133-00	DOUBLE-FACE	2
65	309-0656-00	FRONT PLATE	1
66	013-3932-00	SWITCH*RESET	1
67	074-0967-22	OUTLET SOCKET	1
68	039-0439-00	MAIN PWB	1
69	313-1610-00	HEAT SINK	1
70	305-0238-00	SIDE-CVR (R)	1
71	092-9000-00	ANT-RECEPTACLE	1
72	307-0499-00	REAR-CVR	1
73	855-8000-01	MINI-DIN CORD*8P	1
74	855-8000-04	RCA PIN CORD*6CH	1
75	347-5123-00	INSULATOR	1
76	074-1023-08	OUTLET SOCKET*8P	1
77	075-0305-00	JACK*DIGITAL	1
78	074-1022-01	OUTLET SOCKET*13P	1
79	009-0618-00	CHOKE	1
80	331-0269-00	SHIELD PLATE	1
81	305-0237-01	SIDE-CVR (L)	1
82	731-3006-80	TAPTIGHT	11
83	001-0659-00	LED	1
84	013-3988-00	SWITCH	1
85	074-1077-00	OUTLET SOCKET	2
86	714-2005-81	MACHINE SCREW	2
87	286-8383-00	SETPLATE	1
88	304-0437-00	LOWER-CVR	1
89	347-5124-00	INSULATOR	1
90	345-3799-00	RUBBER PART	6
91	335-0833-01	LEAD HOLDER	1
92	303-0449-00	UPPER-CVR	1
94	929-0060-81	CD-MECH-MODULE	1
95	331-0582-00	MECH-BRKT	1
96	714-2603-80	MACHINE SCREW	5
97	714-2004-19	MACHINE SCREW	2
98	816-2332-00	FLAT CABLE*FPC	1
99	714-5008-40	MACHINE SCREW	2


**CIRCUIT DIAGRAM: 1/3**

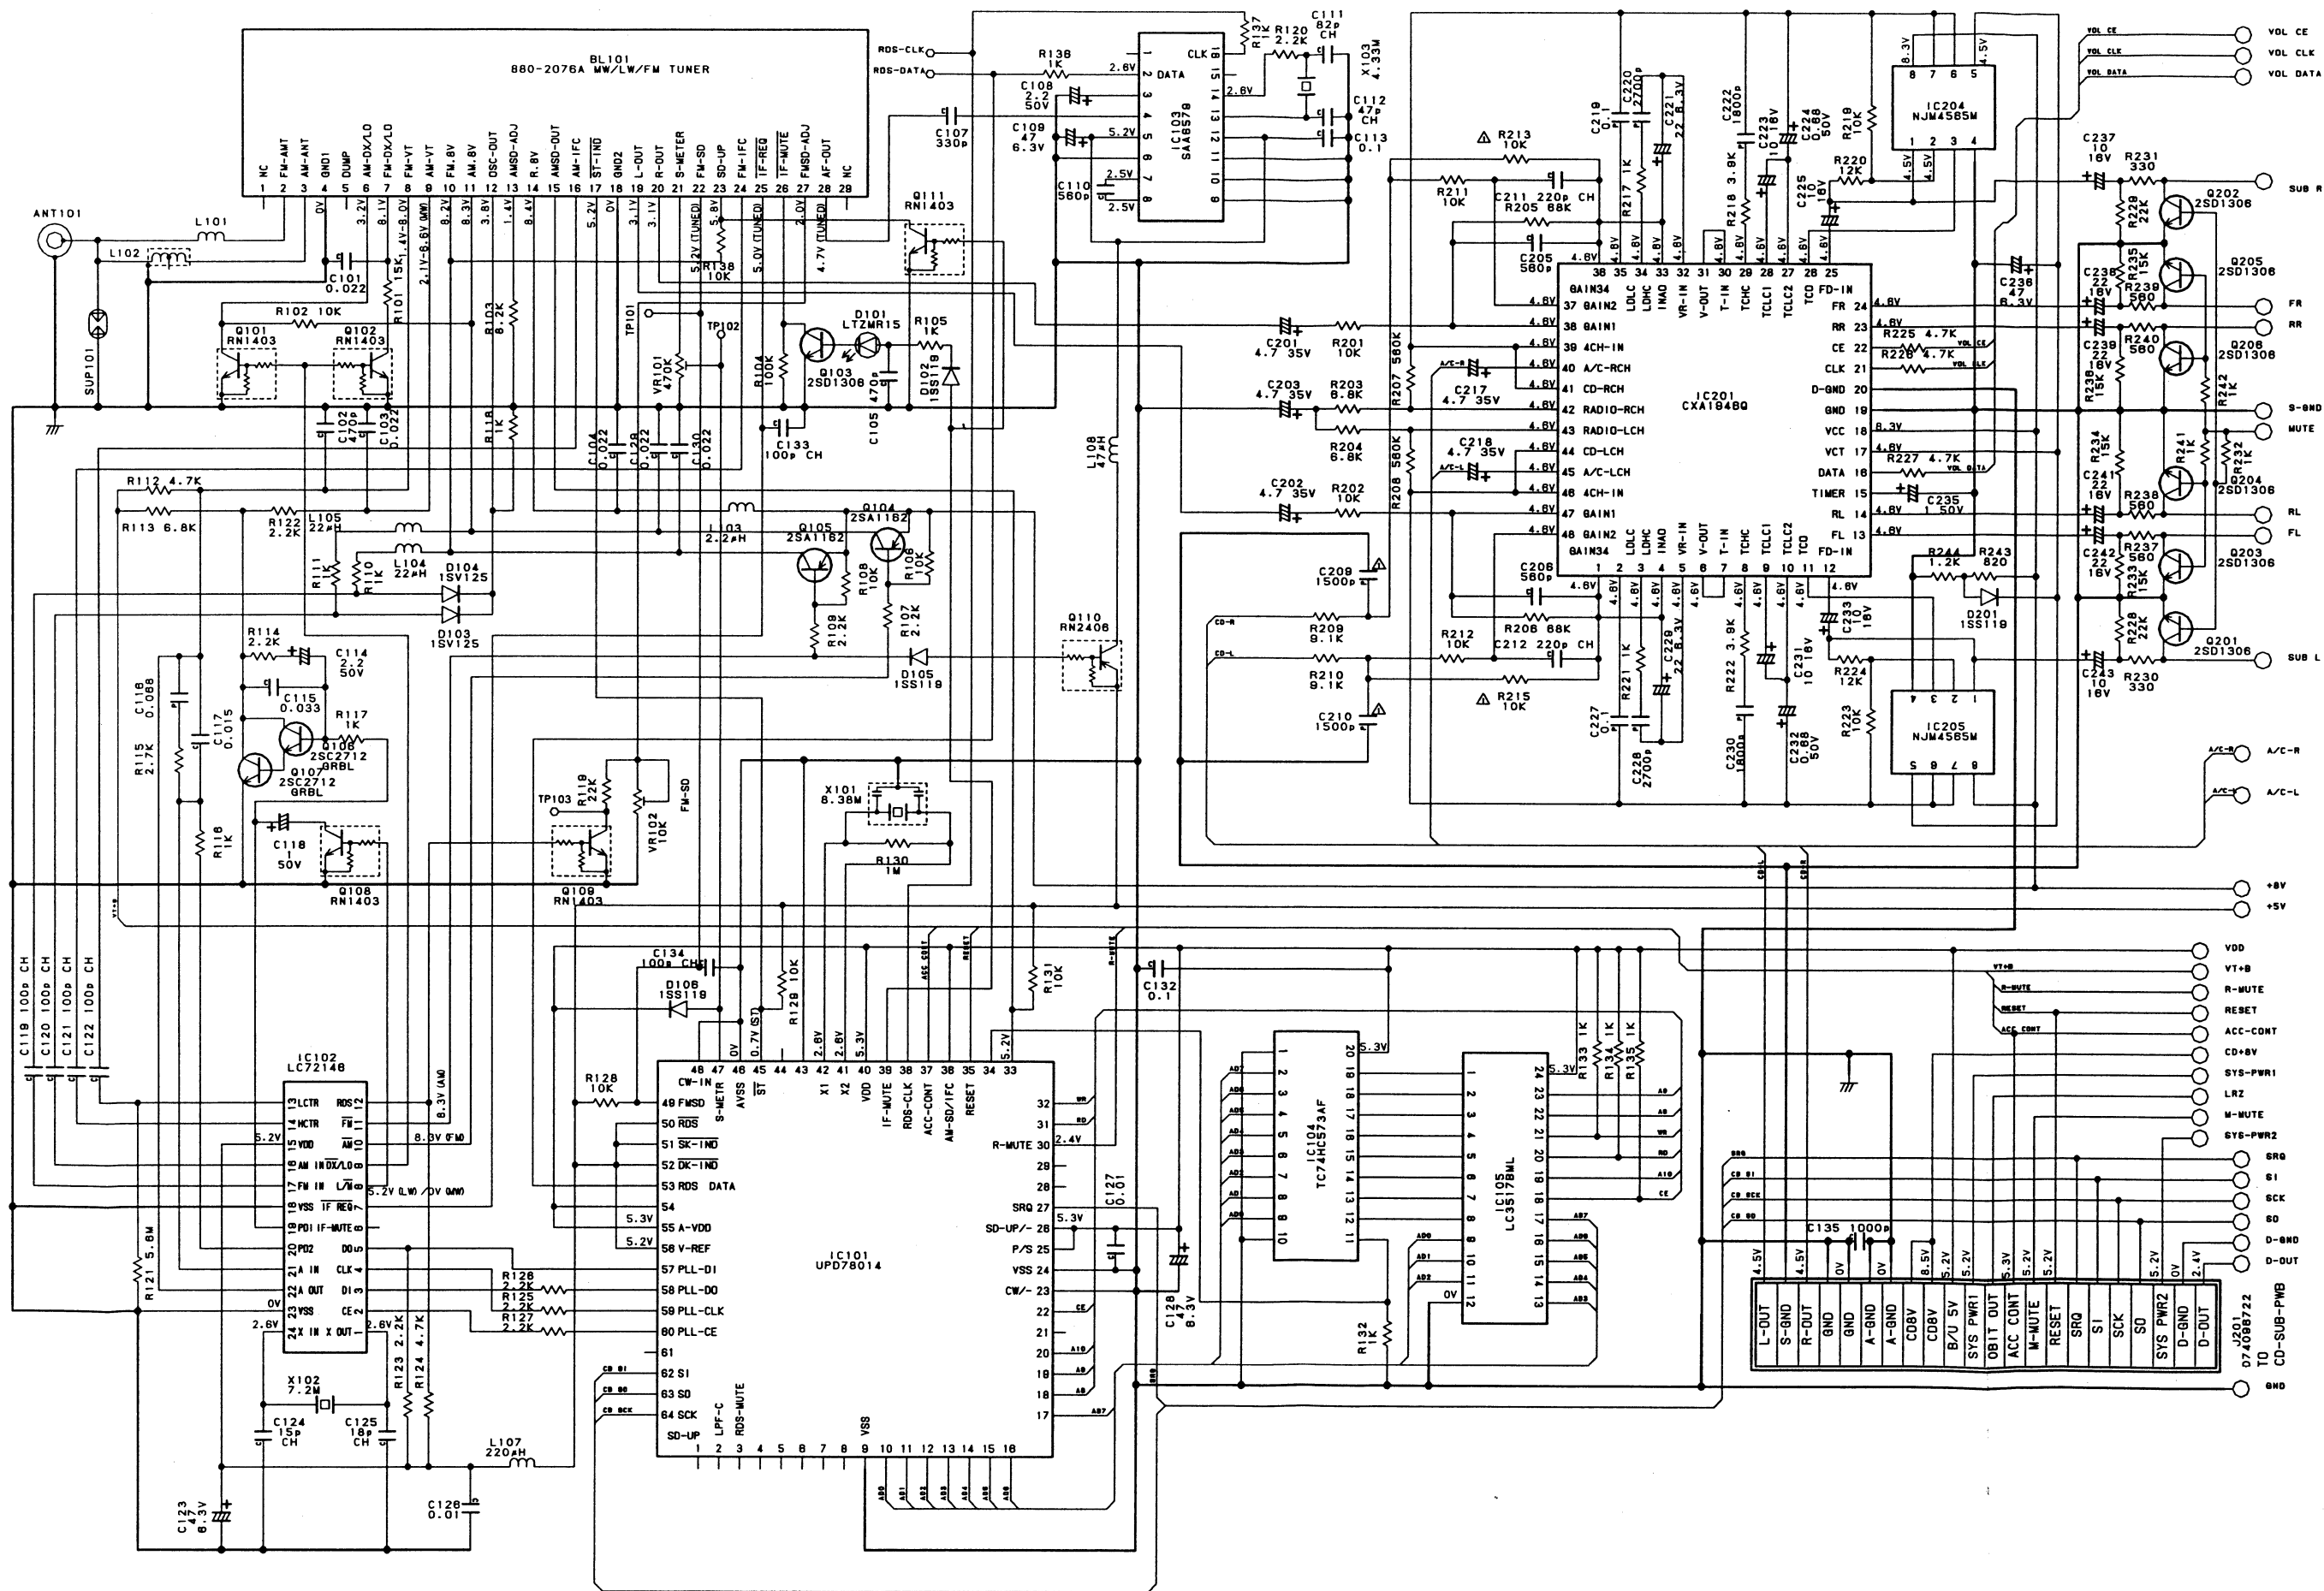


DRX9175R

DRX9175R

**CIRCUIT DIAGRAM: 2/3**

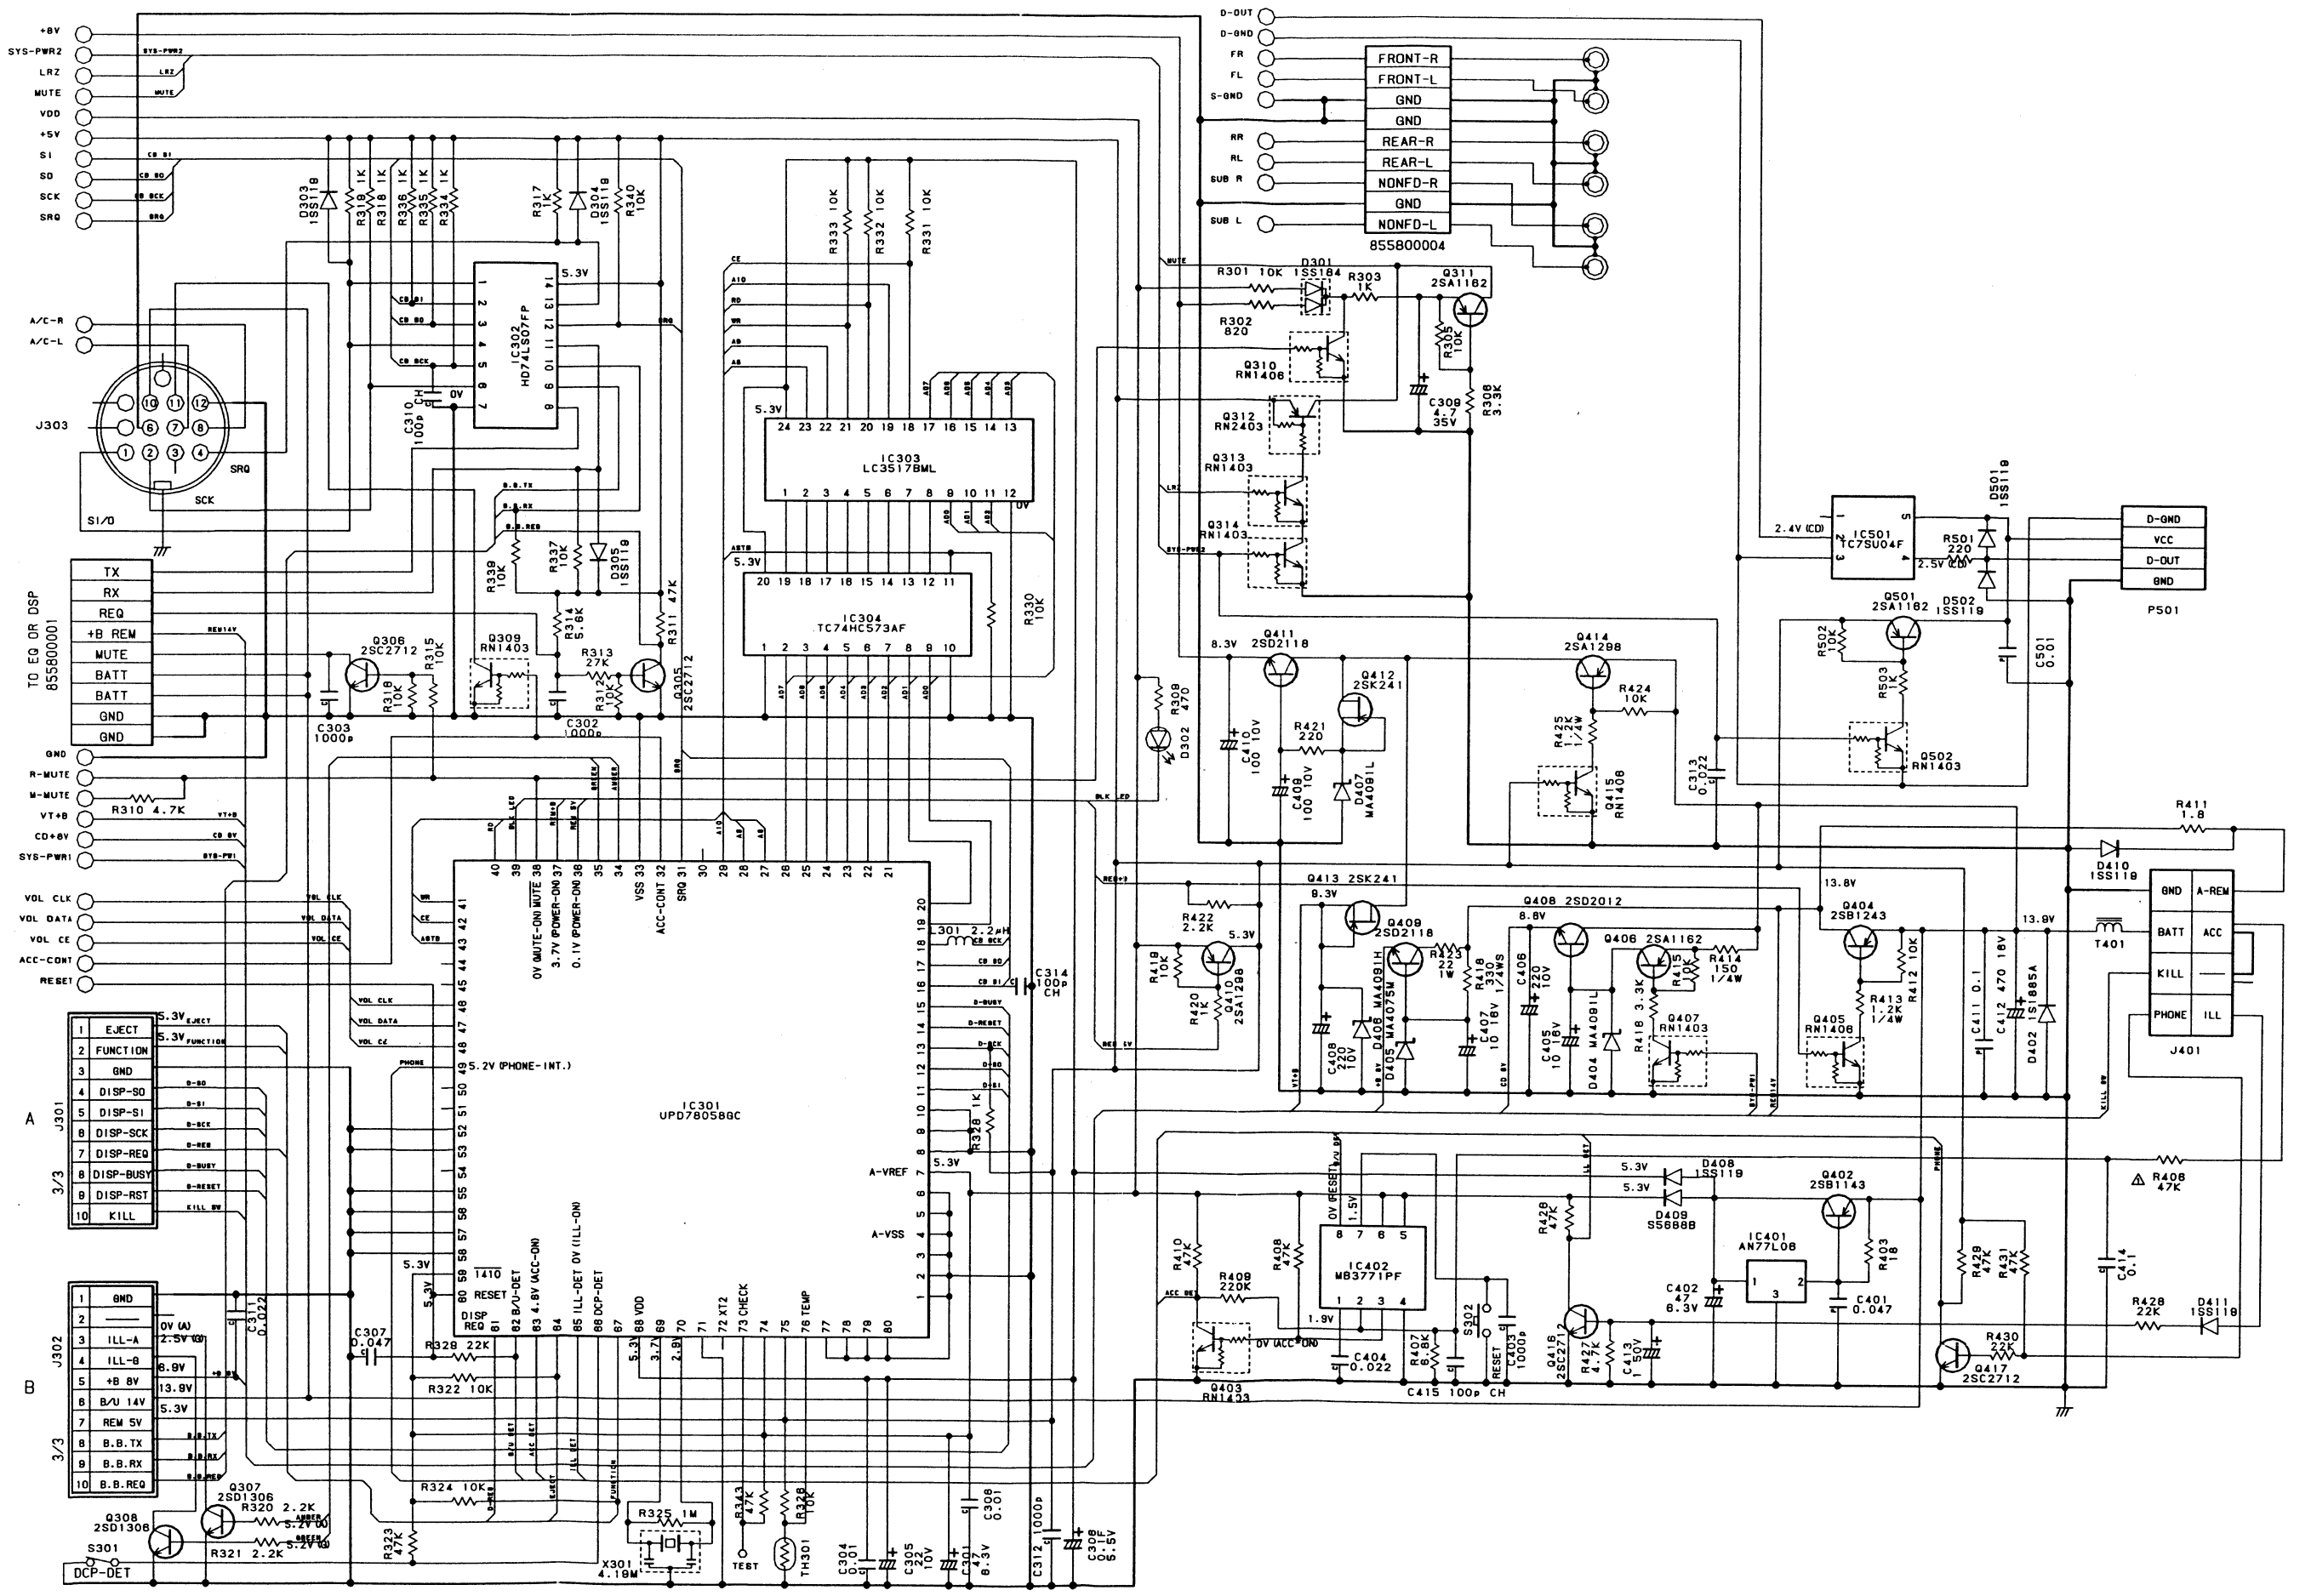

CIRCUIT DIAGRAM: 3/3

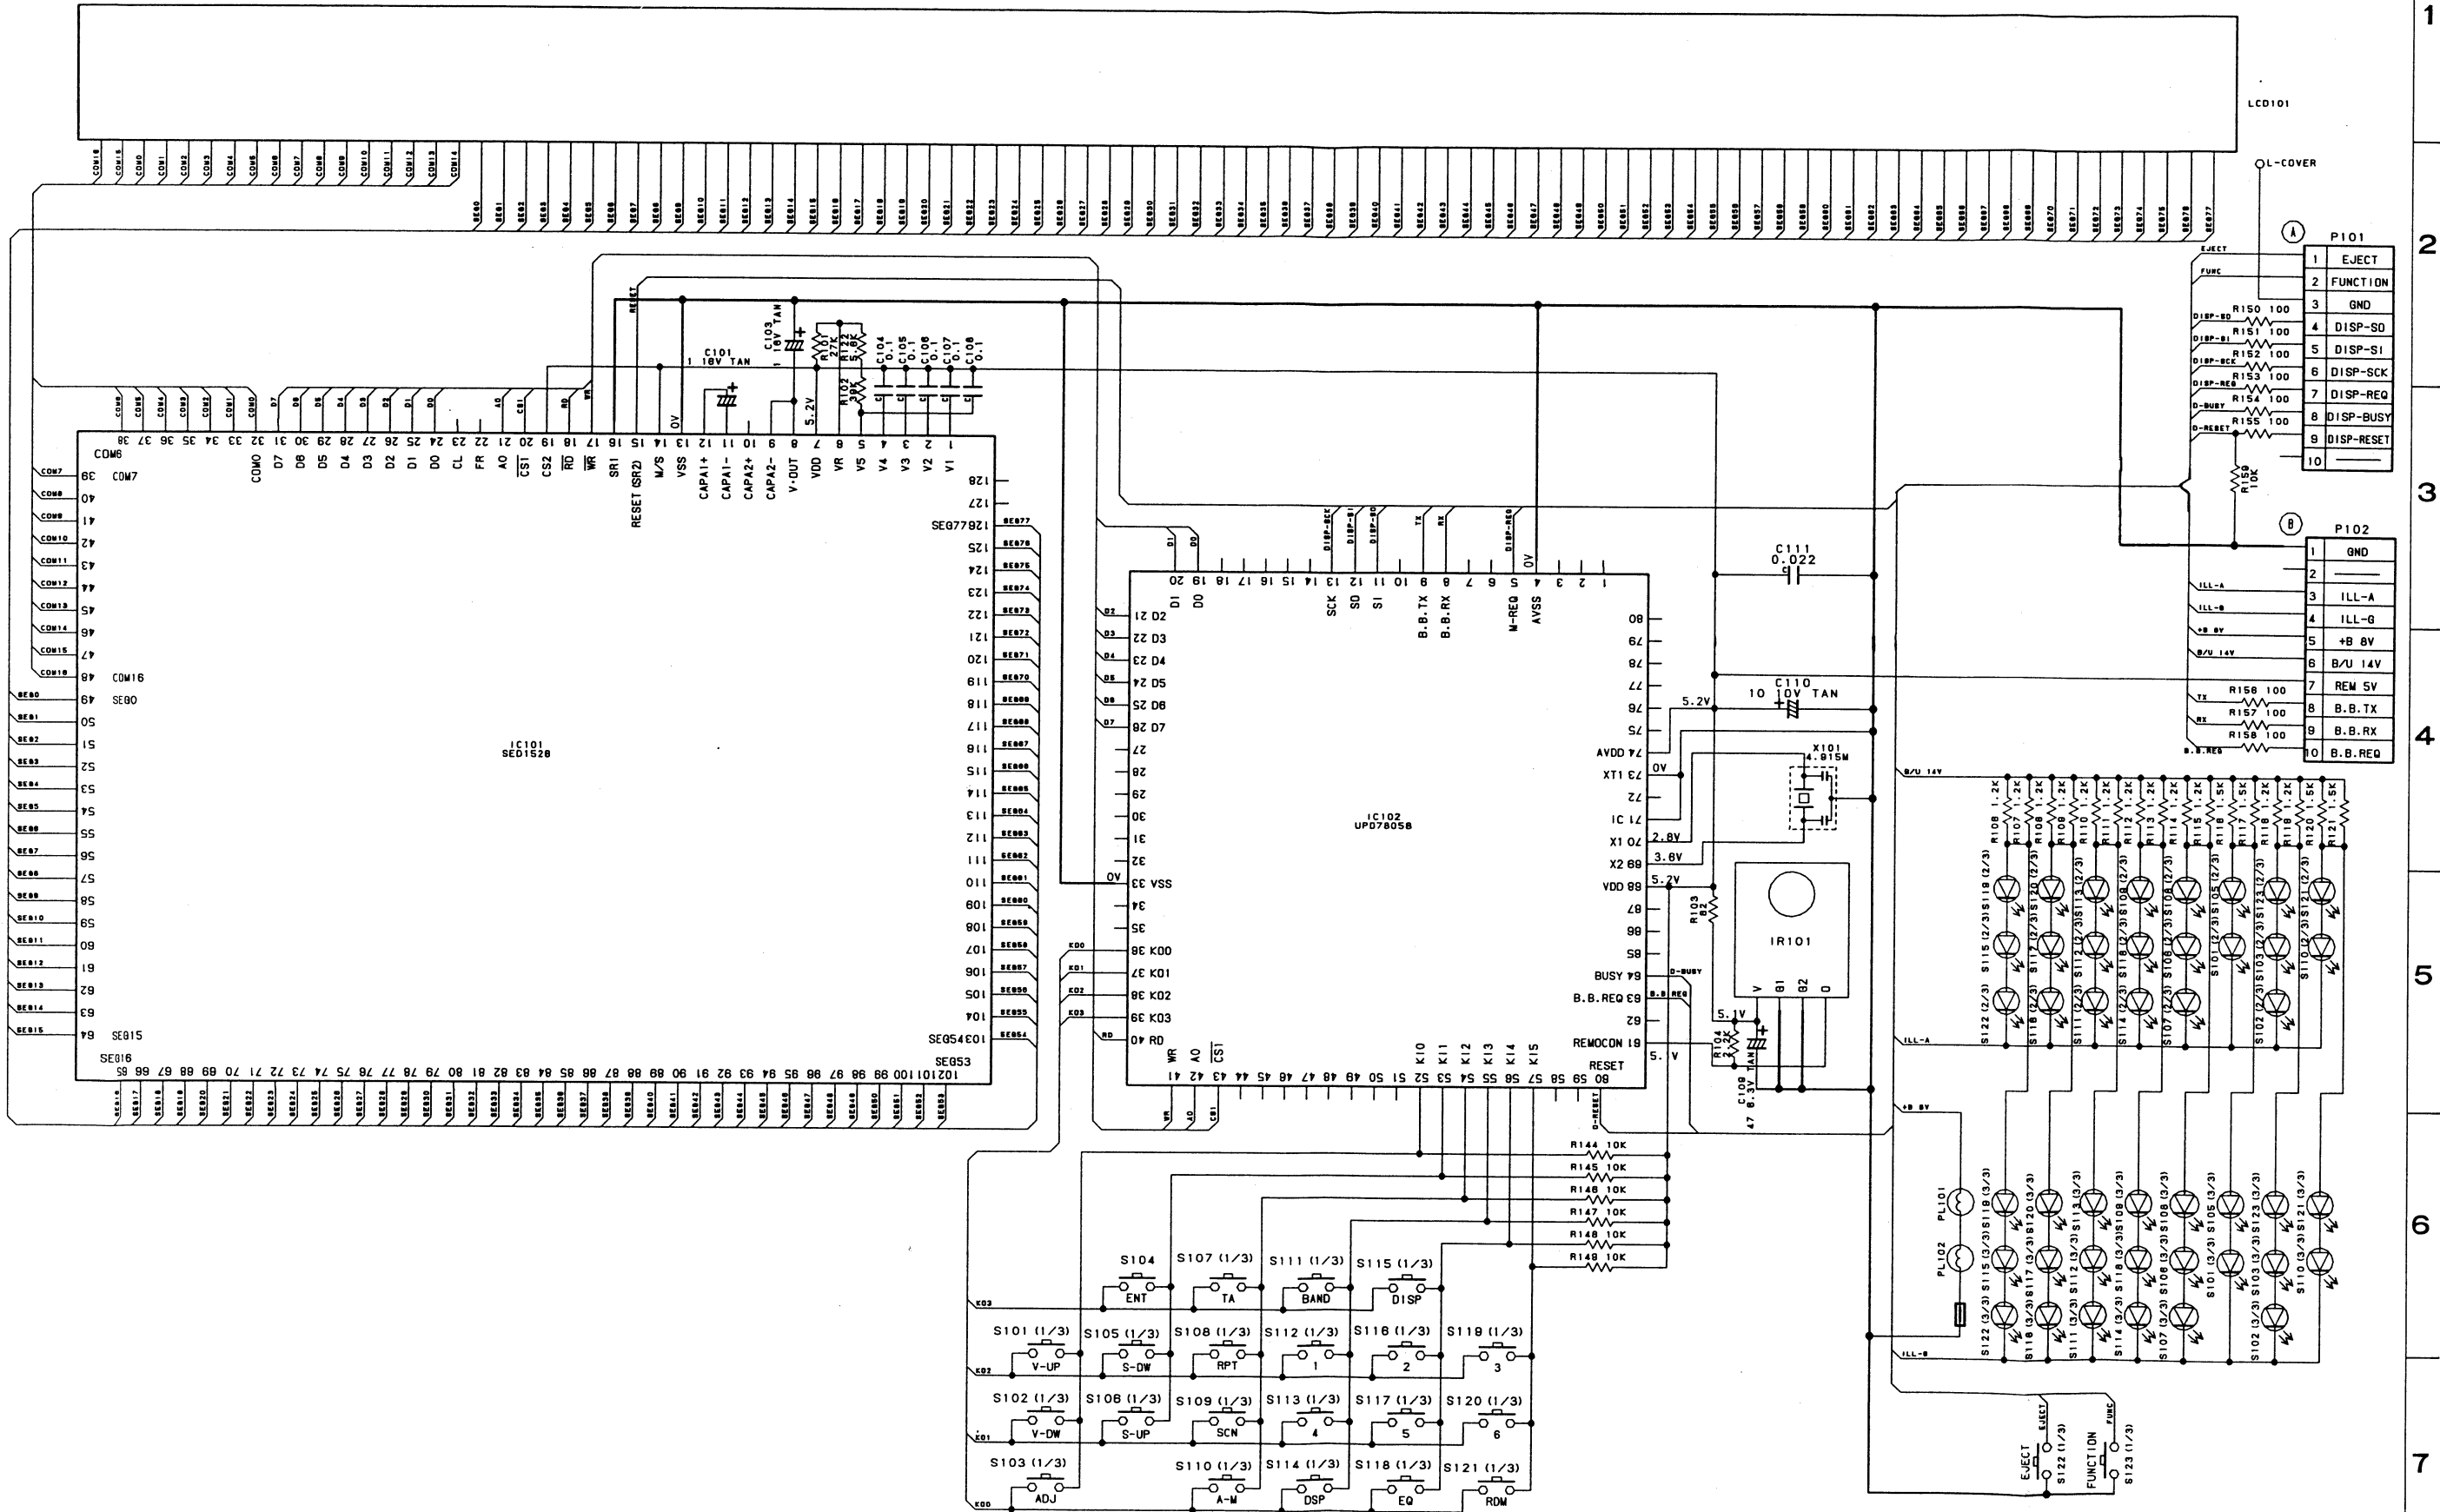


1  
2  
3  
4  
5  
6  
7




PRINTED WIRING BOARD:



SWITCH P.W.B

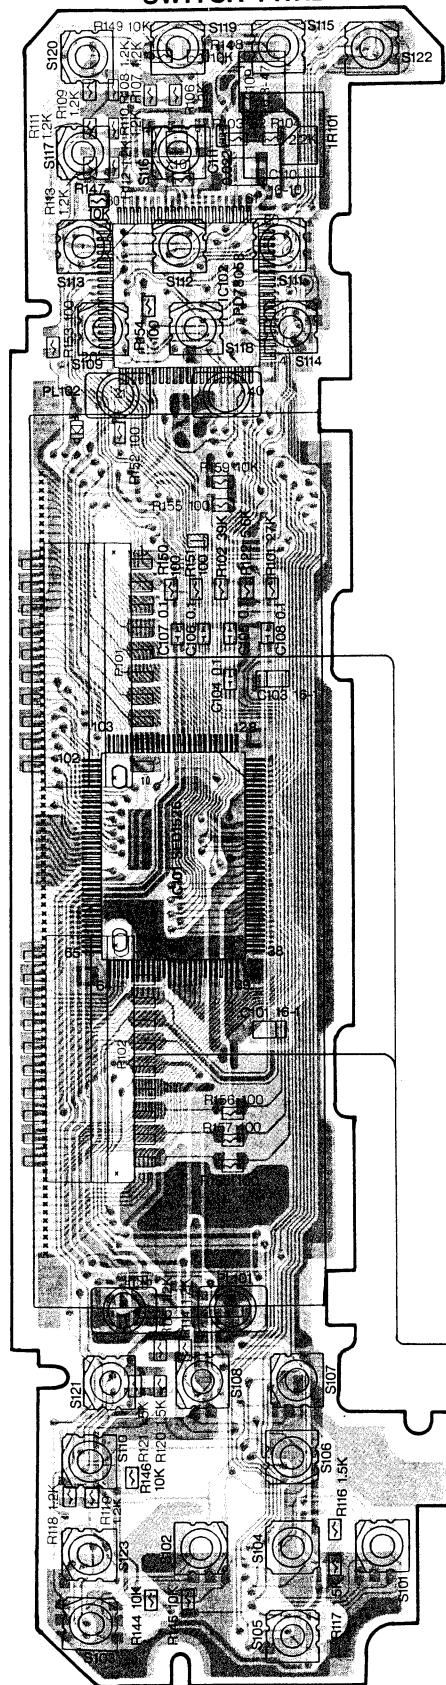

MAIN P.W.B


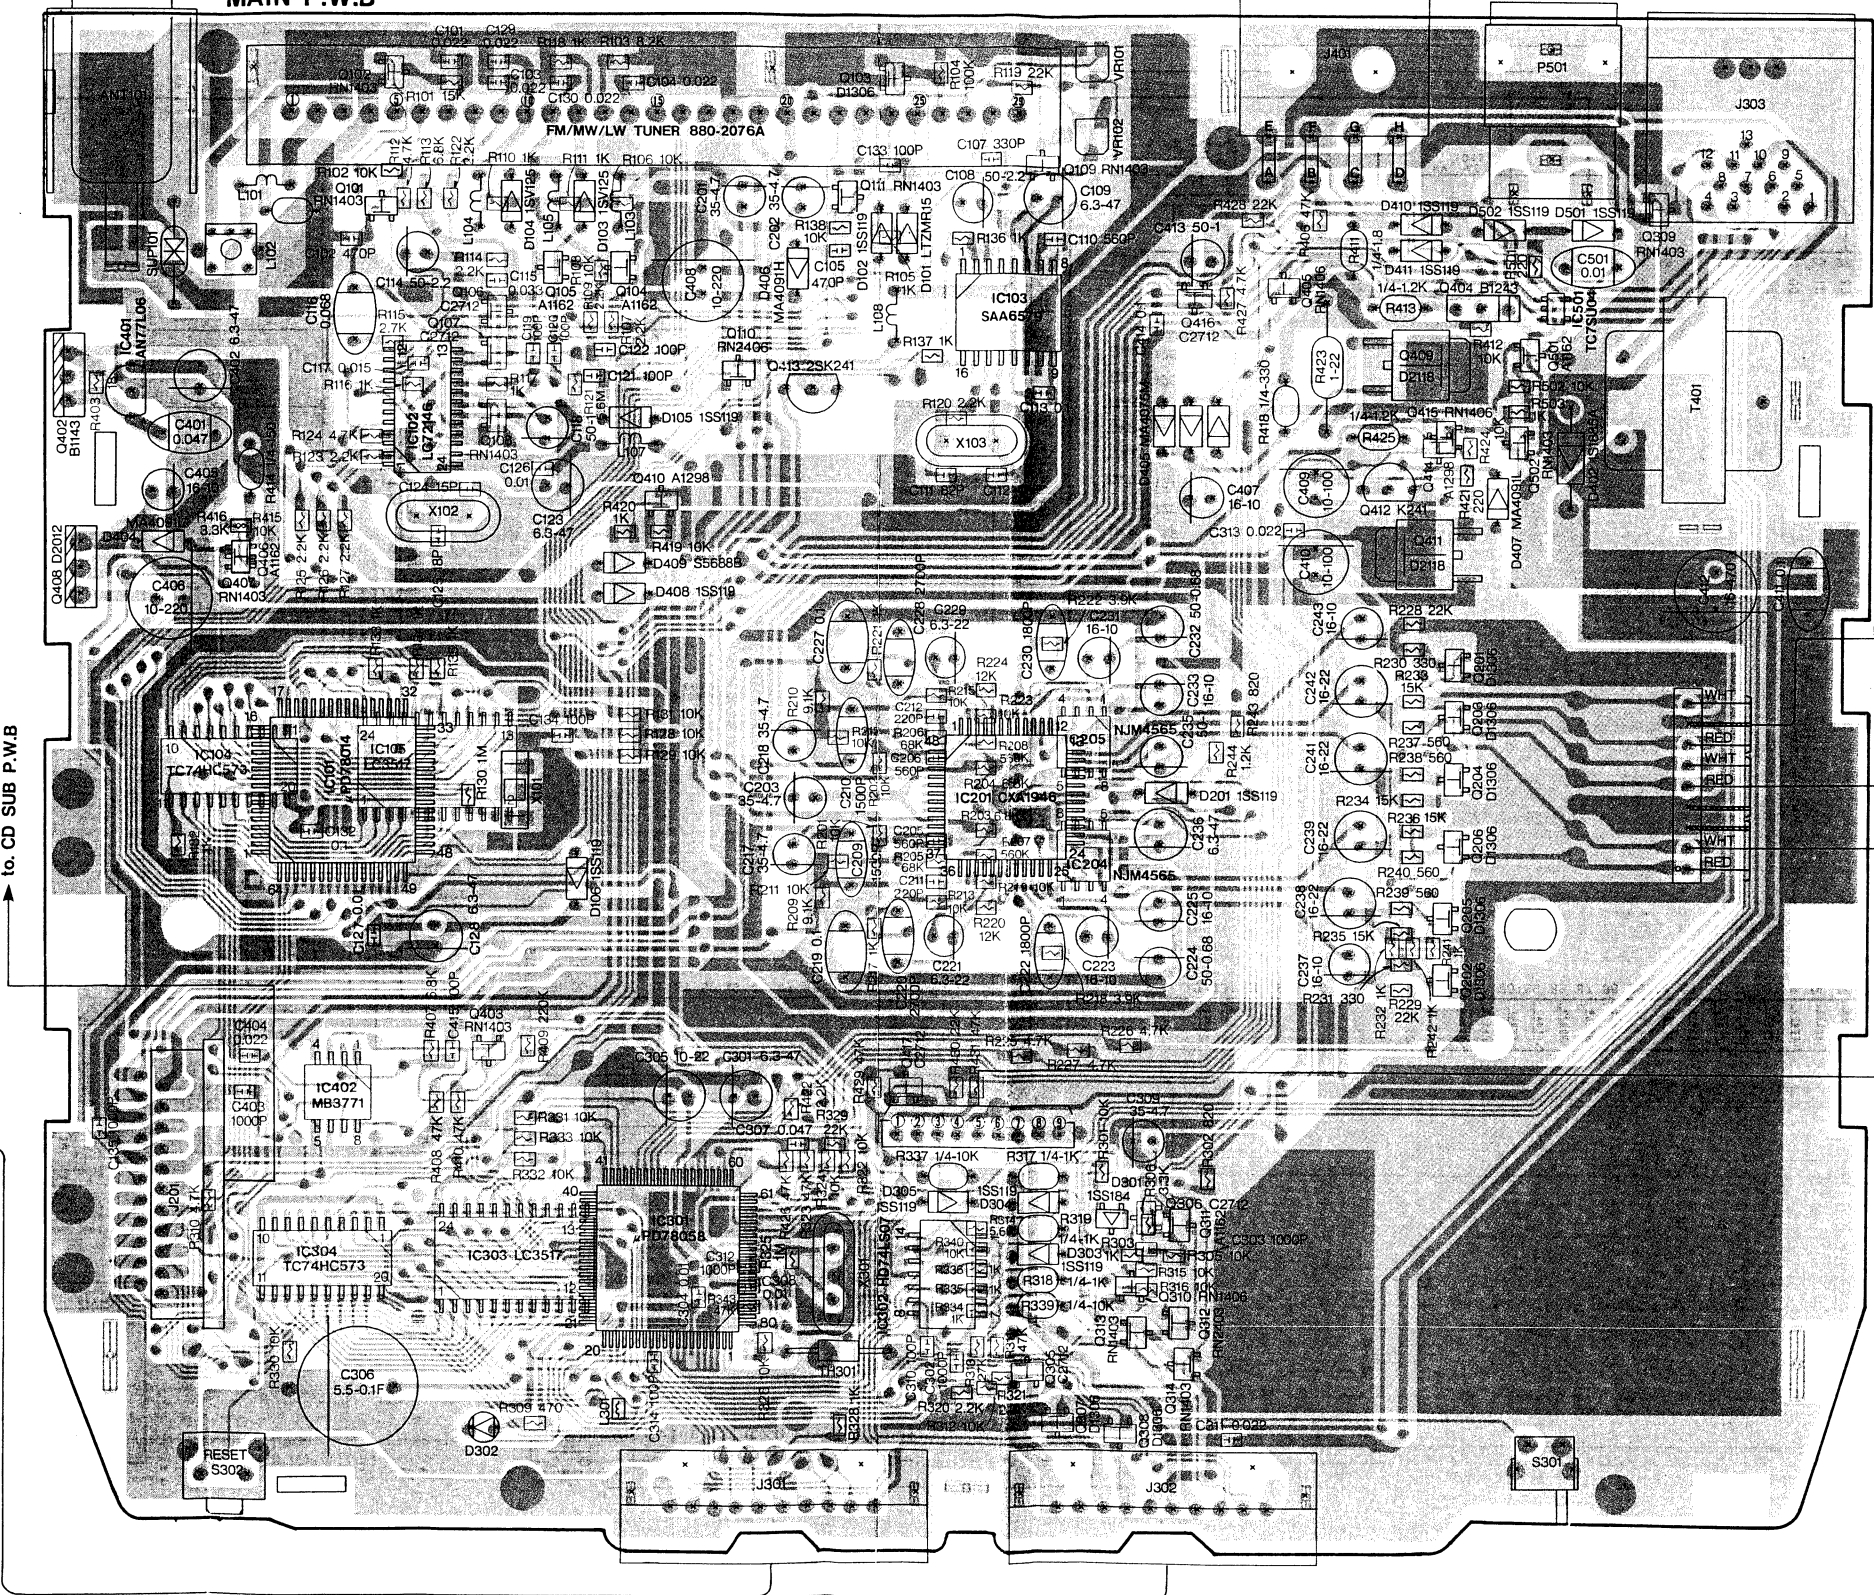


A	AUTO ANTENNA	E	GND
B	ACC	F	BACK UP
C	ILLUMINATION	G	STARTER KILL
D		H	PHONE MUTE



1	SI/SO
2	SCK
3	
4	SRQ
5	
6	S-GND
7	L-ch INPUT
8	R-ch INPUT
9	
10	BACK UP
11	ACC CONTROL
12	GND
13	


to CD SUB P.W.B

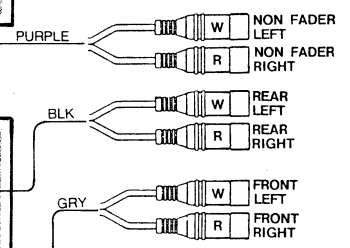


1	TX (DATA OUT)
2	RX (DATA IN)
3	REQ
4	+B REM
5	MUTE
6	BACK UP
7	BACK UP
8	GND

■CIRCUIT DIAGRAM: ©CD SUB P.W.B

■回路図

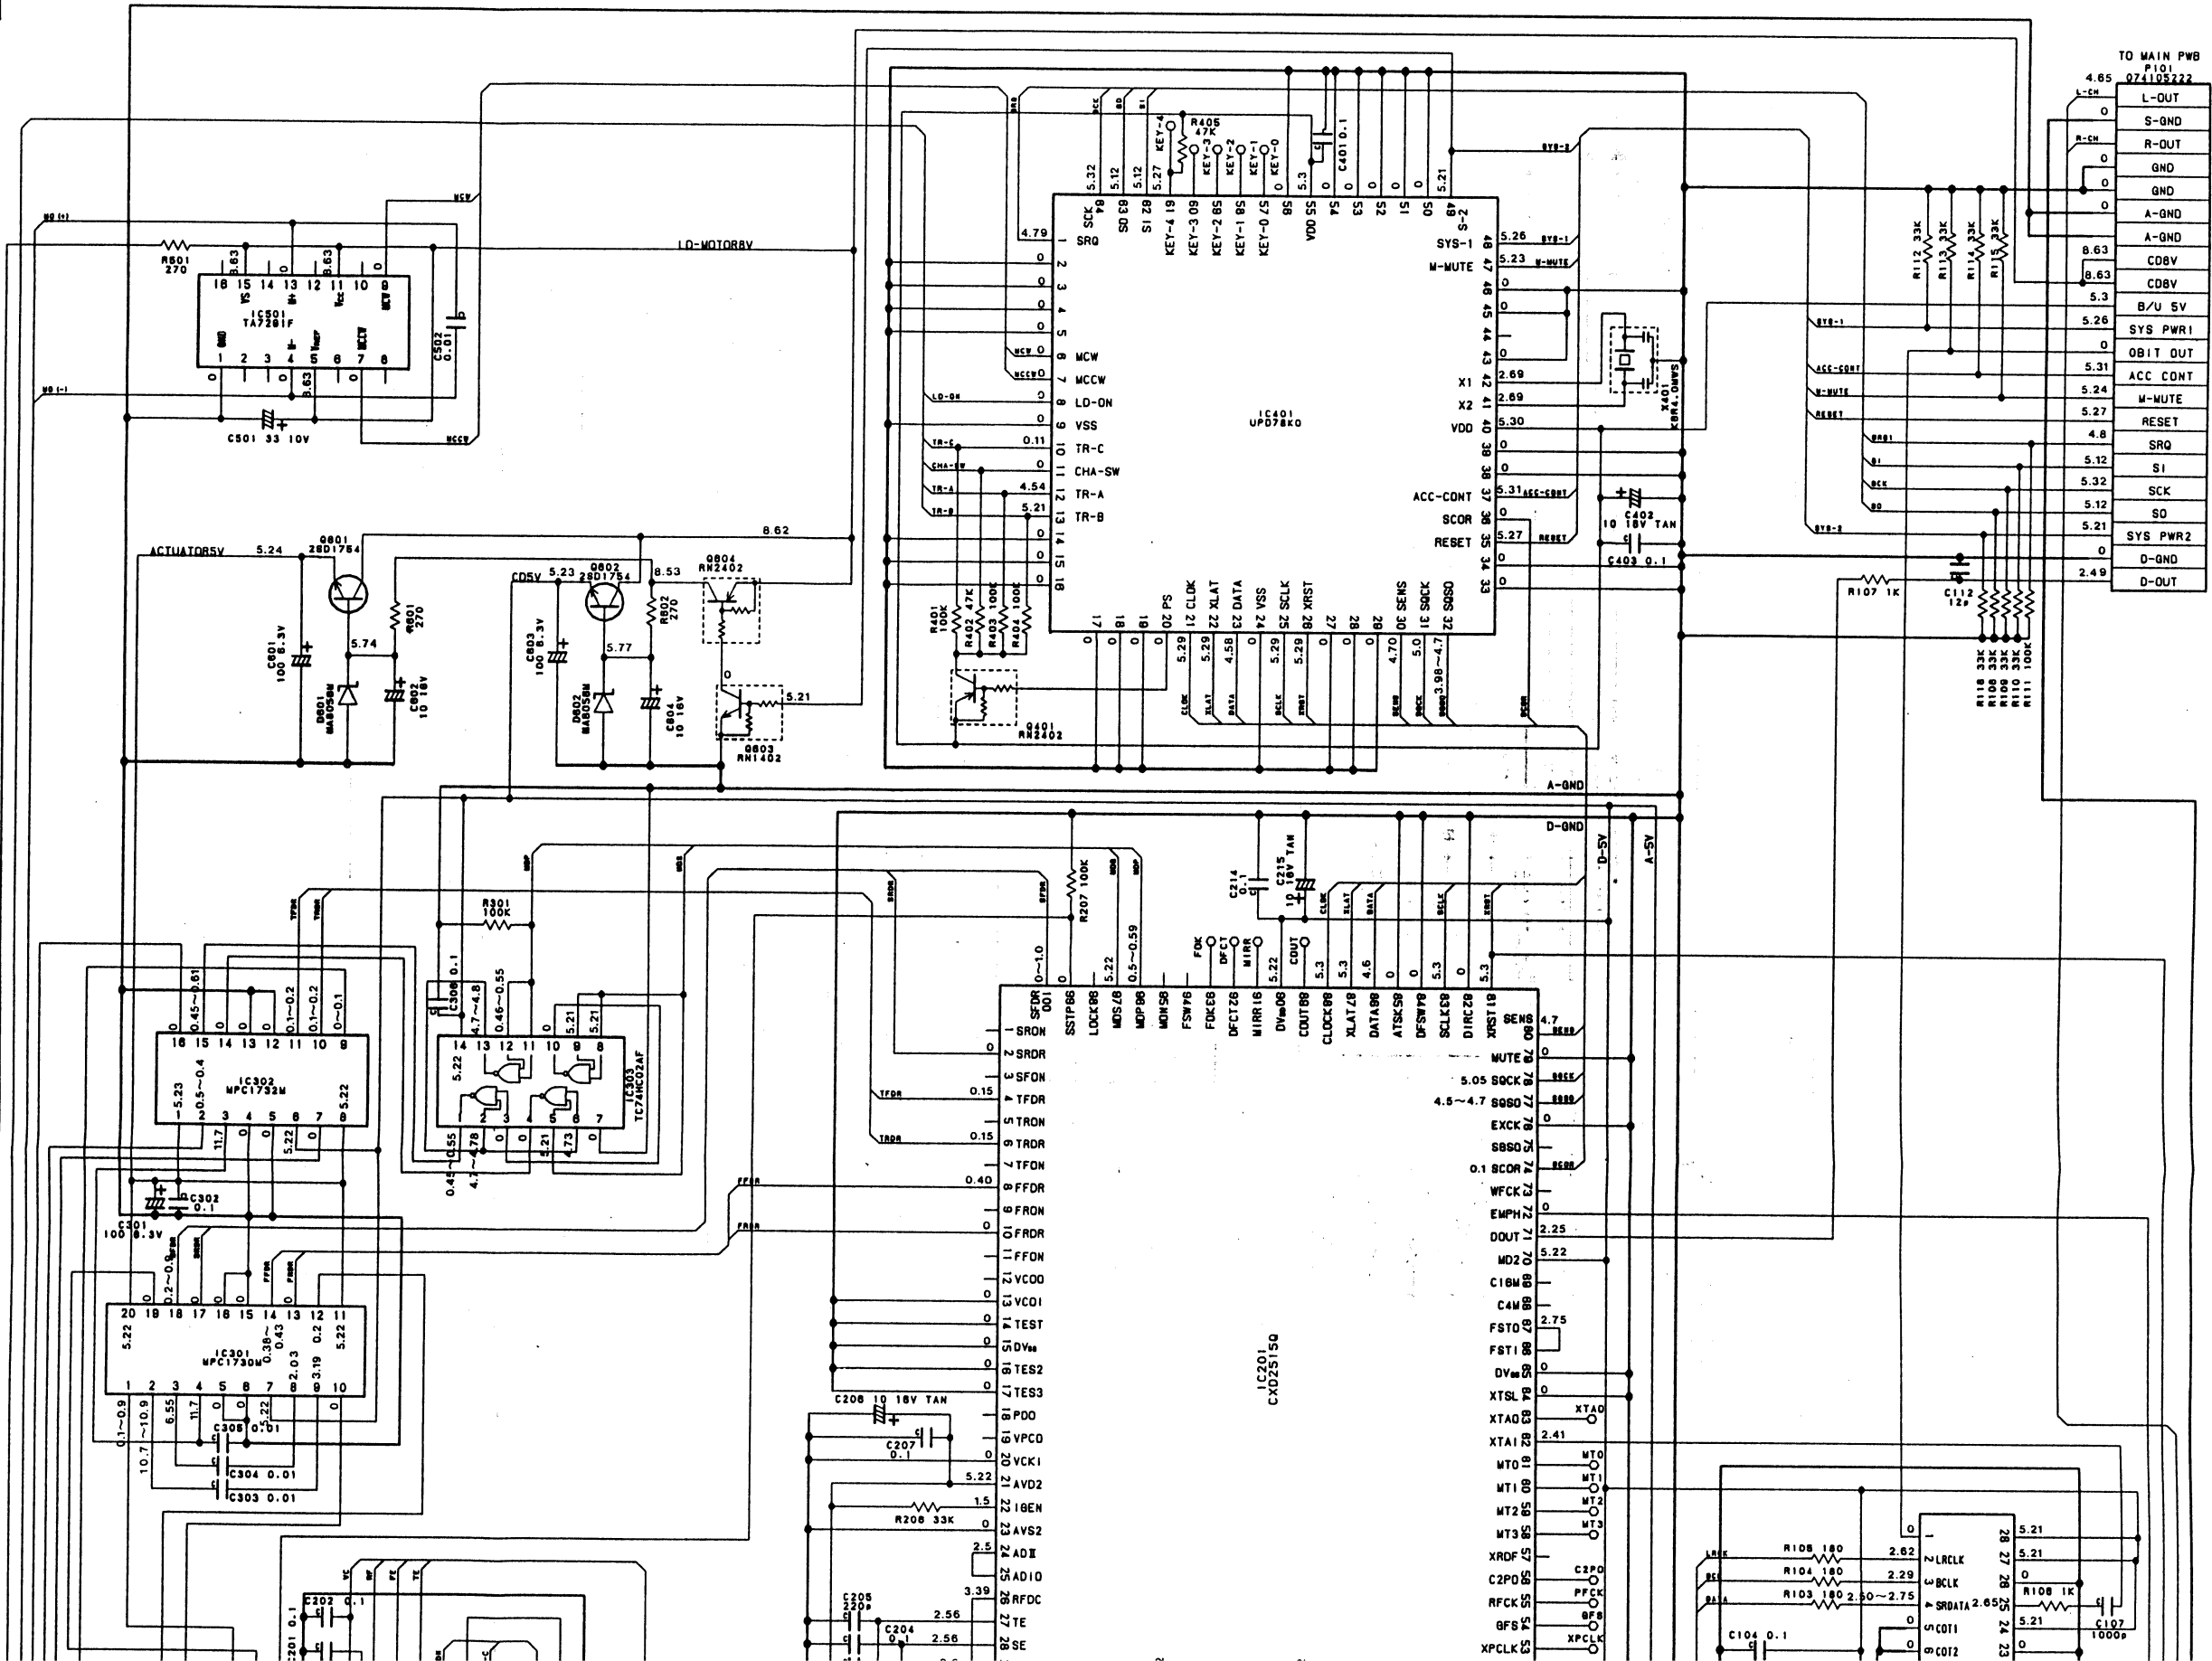




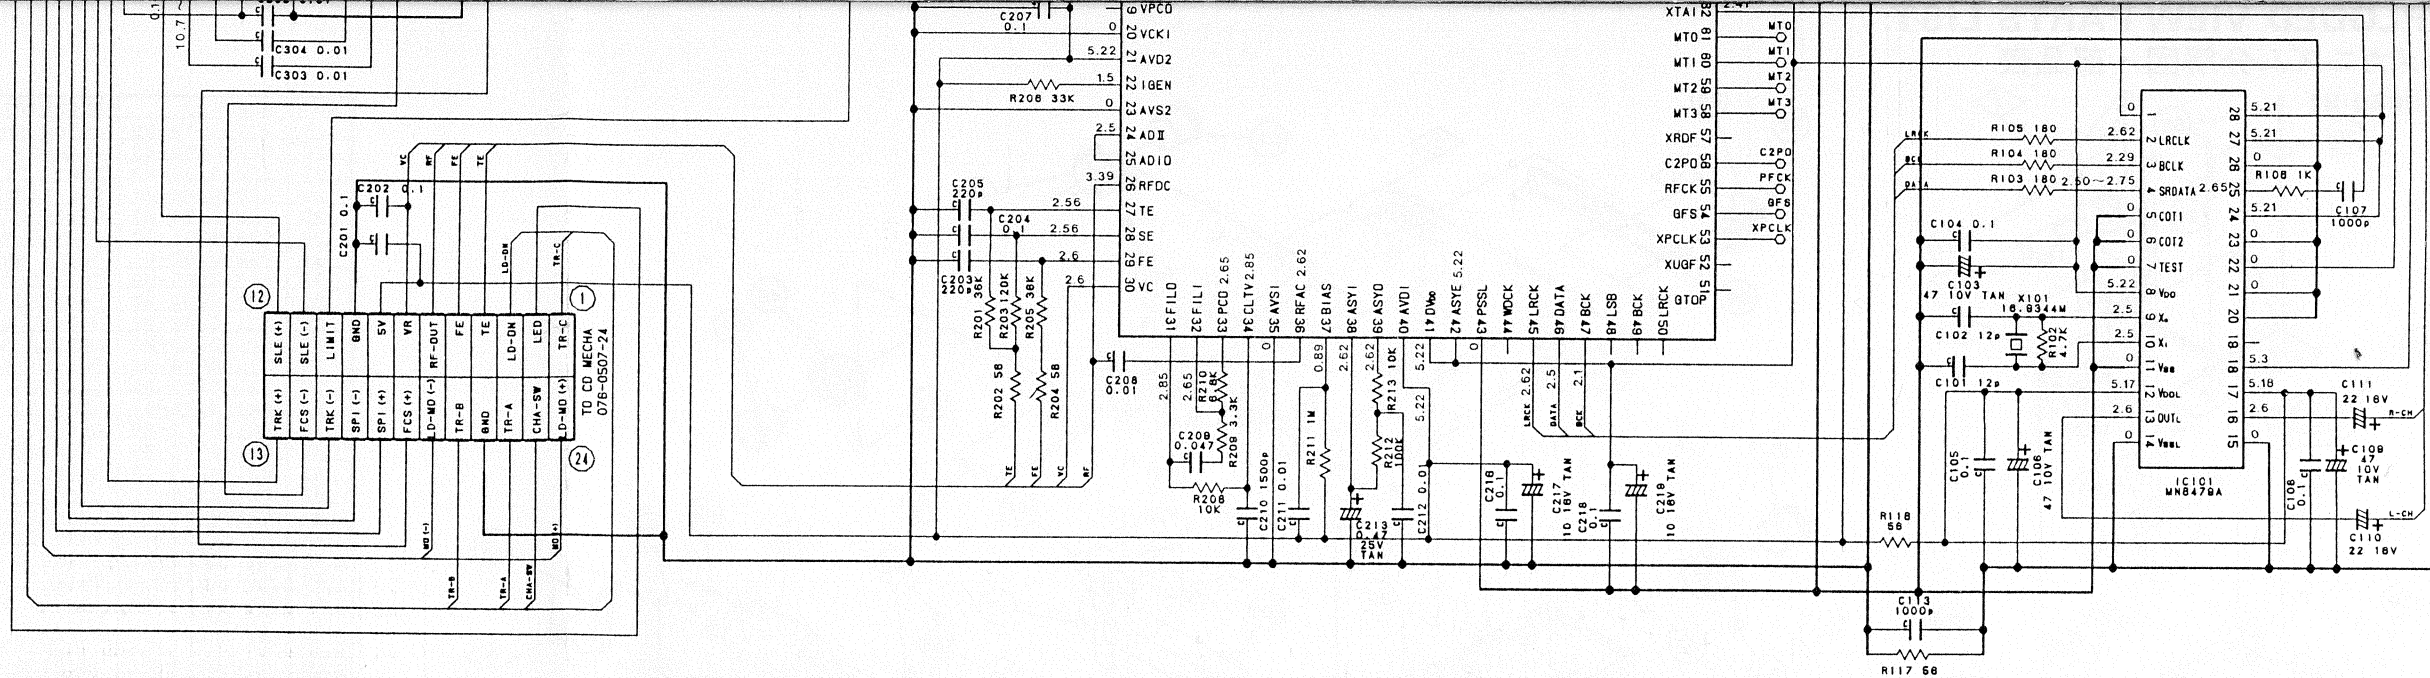

■ PRINTED WIRING BOARD: ©CD SUB P.W.B


■ プリント基板図

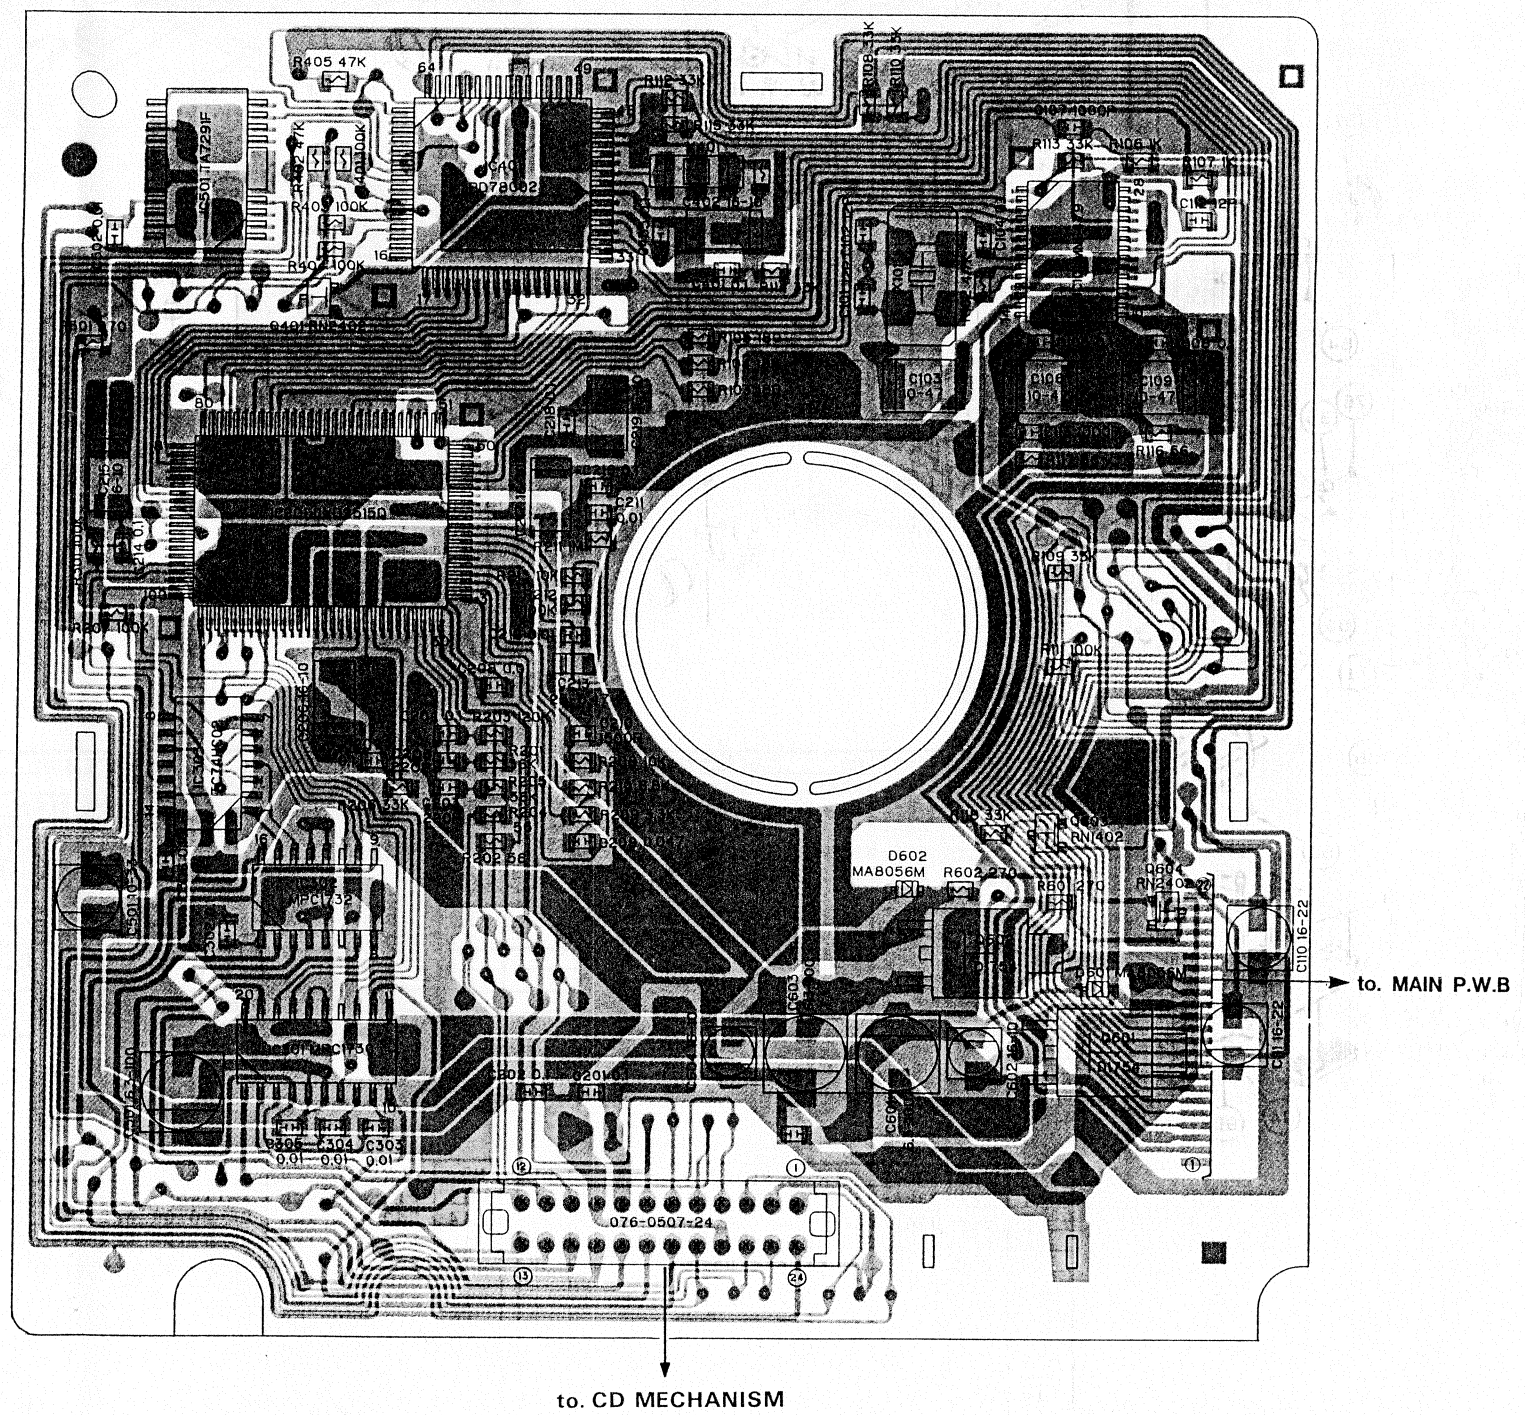



■CIRCUIT DIAGRAM: ©CD MECHANISM section 929-0060-81

■回路図

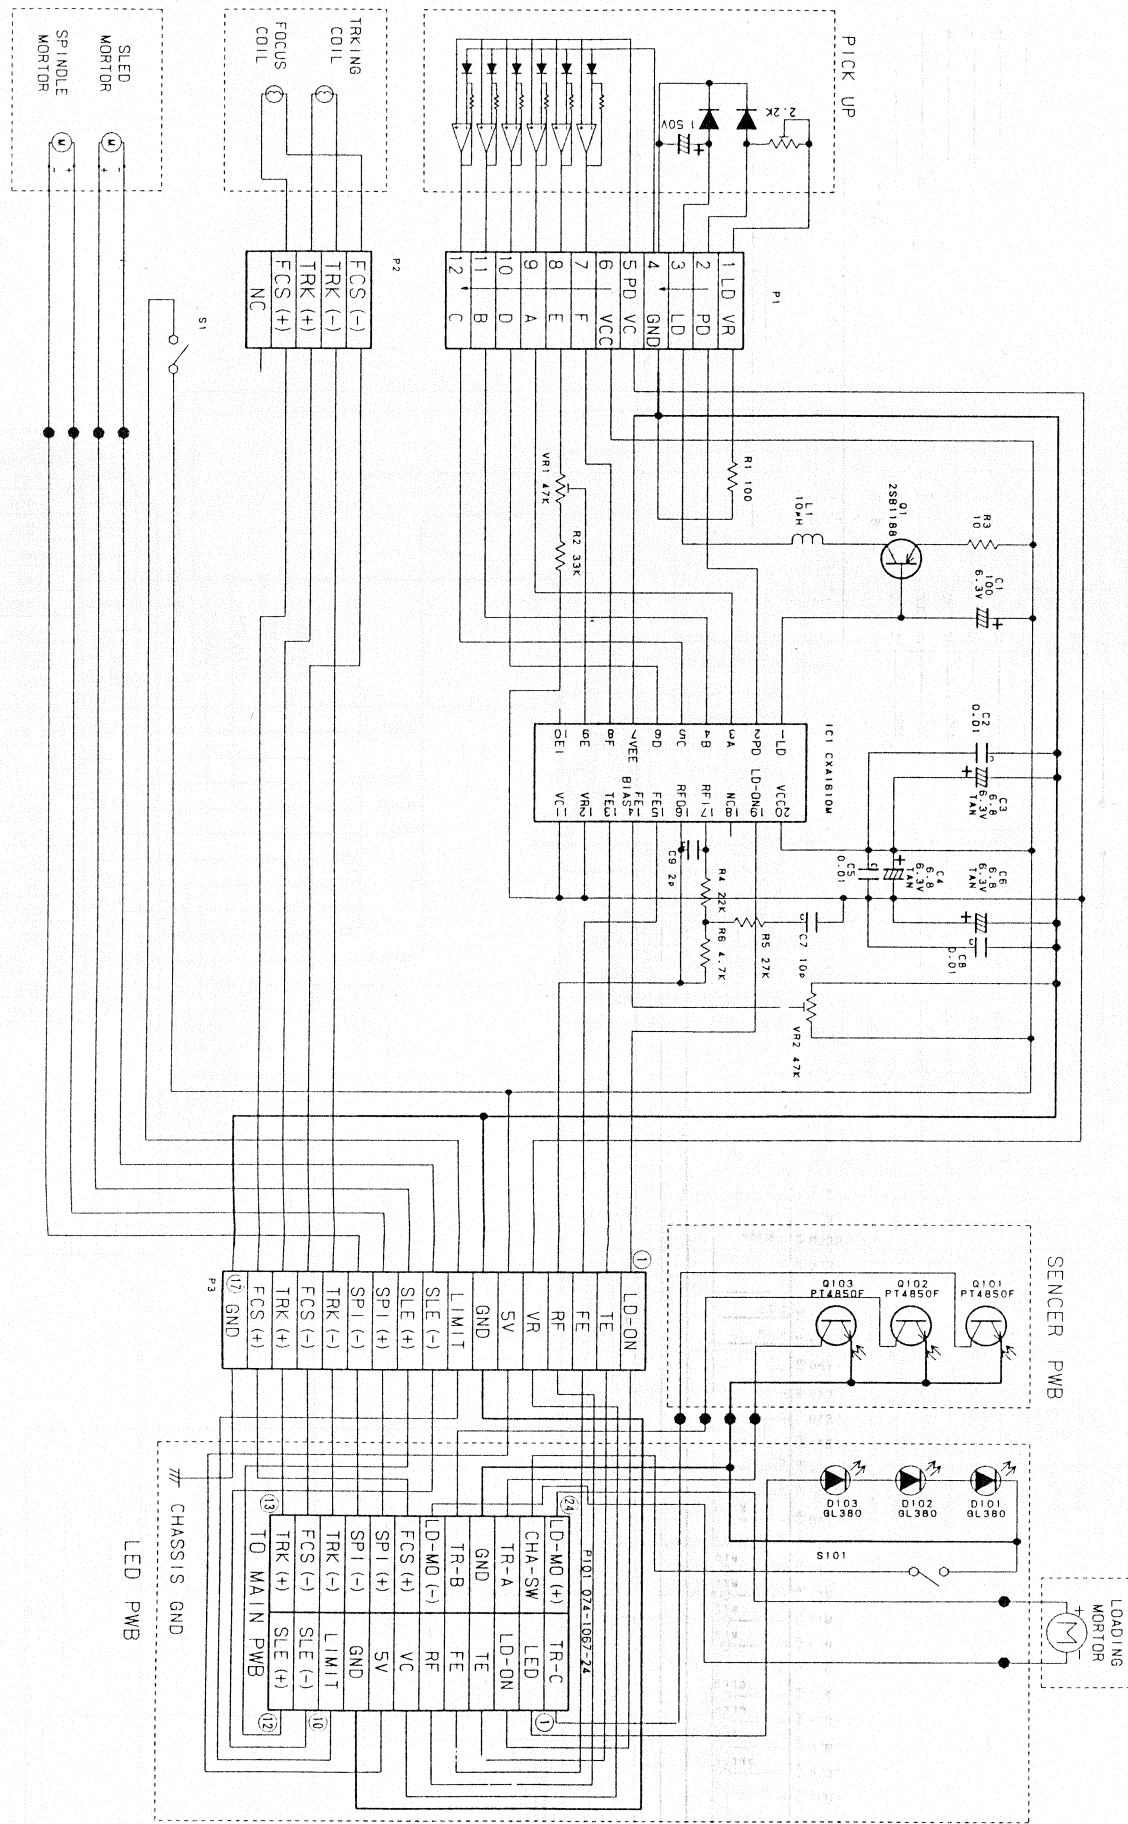


◎CD MECHA. RE. PWB

REF. NO.	PART NO.	DESCRIPTION	QTY
L1	010-2199-00	COIL 10 $\mu$ H	1
UR1.2	012-6000-09	VARIABLE-R 47K	2
S1	013-3989-00	SWITCH	1
C3,4,6	042-0423-03	CHIP-C 6.3U 6.8 $\mu$ F TAN	3
IC1	051-1971-00	IC CXA1610M	1
Q1	101-1188-50	TRANSISTOR 2SB1188	1
C1	163-1073-10	CHIP-C 6.3U 100 $\mu$ F	1
C7	176-1007-00	CHIP-C 100P	1
C9	176-2096-00	CHIP-C 20P	1
C2,5,8	178-1032-05	CHIP-C 0.01 $\mu$ F	3

■PRINTED WIRING BOARD: ©CD MECHANISM section 929-0060-81

■プリント基板図

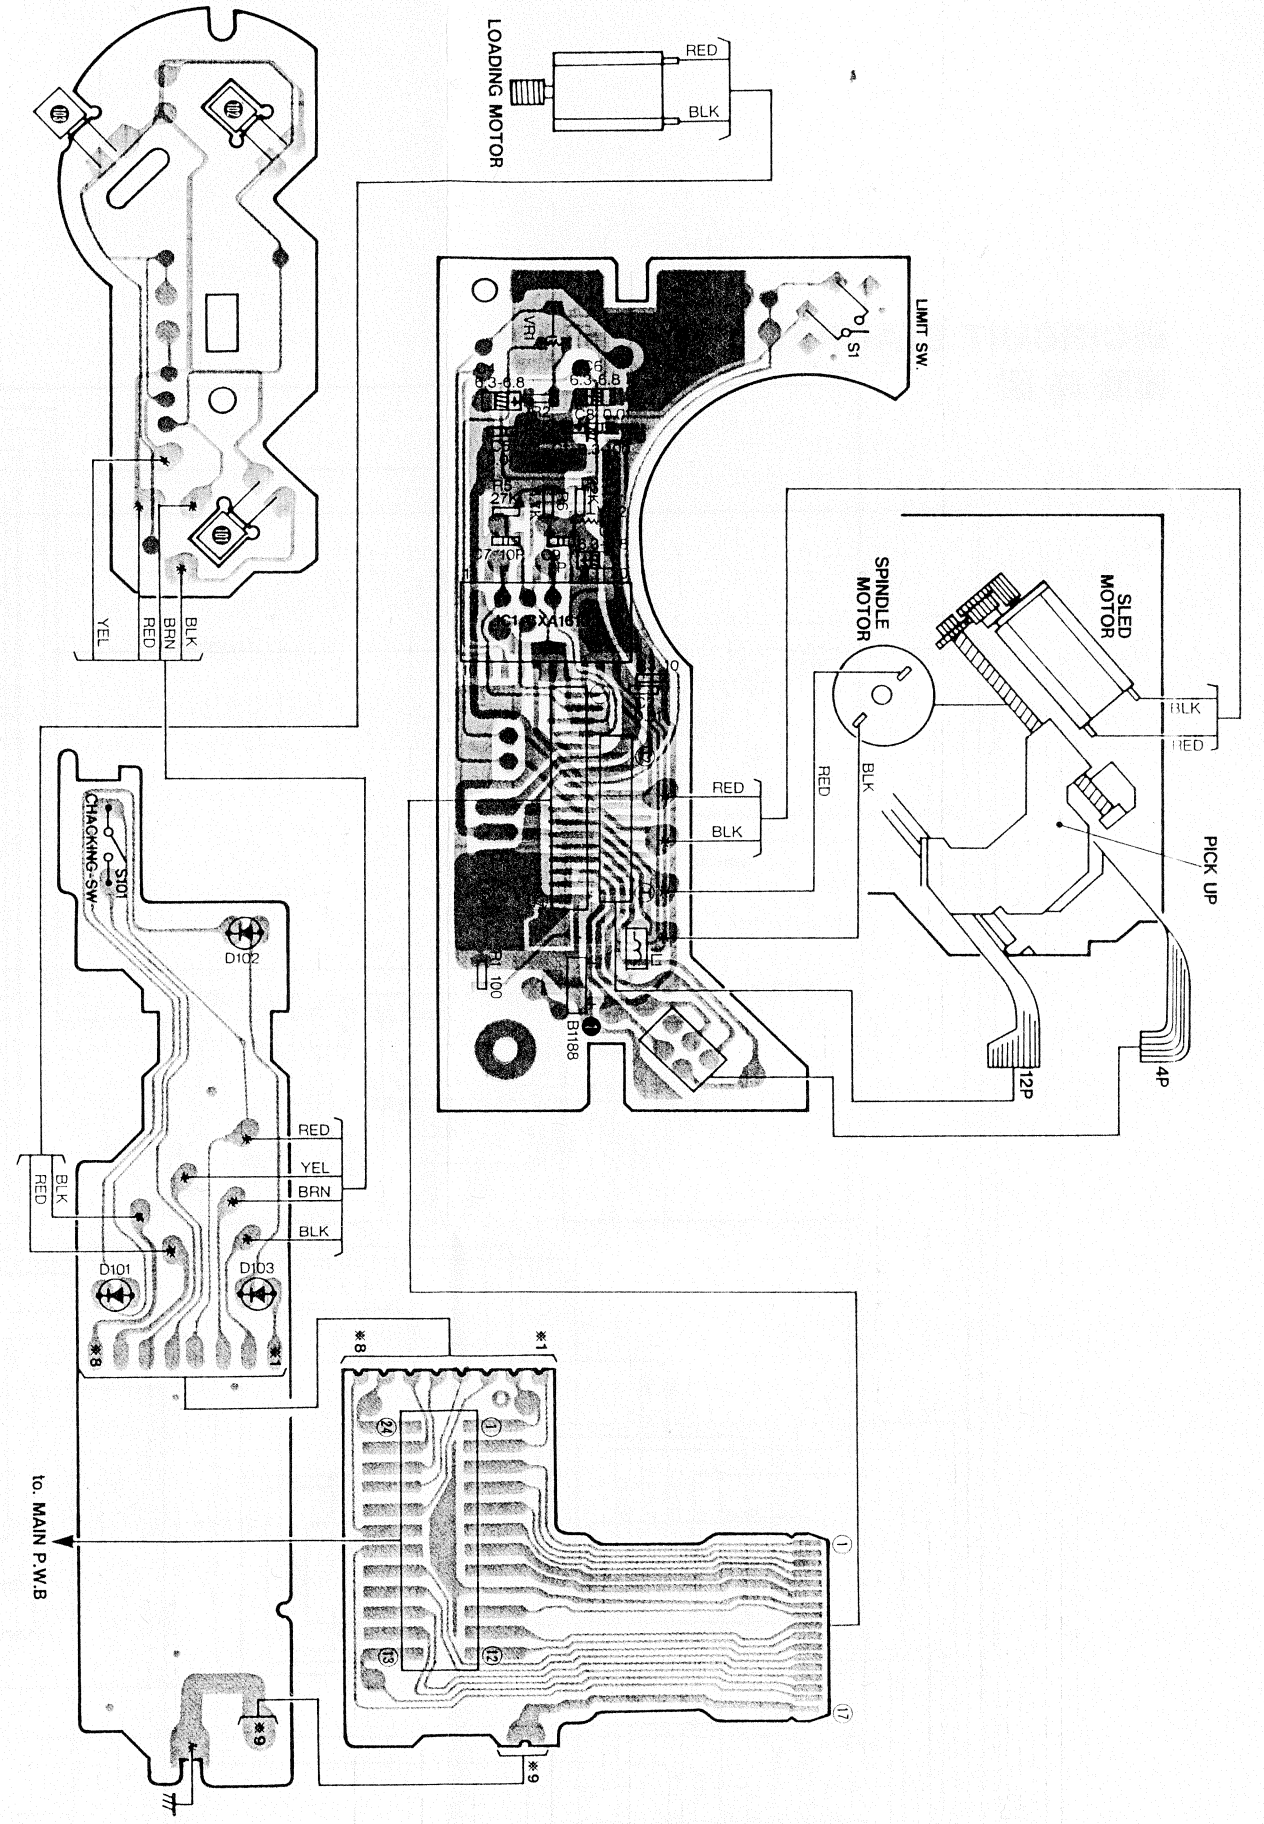


■EXPLODED VIEW PARTS LIST:

■CDメカニズム分解図・部品表

■EXPLODED VIEW PARTS LIST:

■CDメカニズム分解図・部品表

©929-0060-81

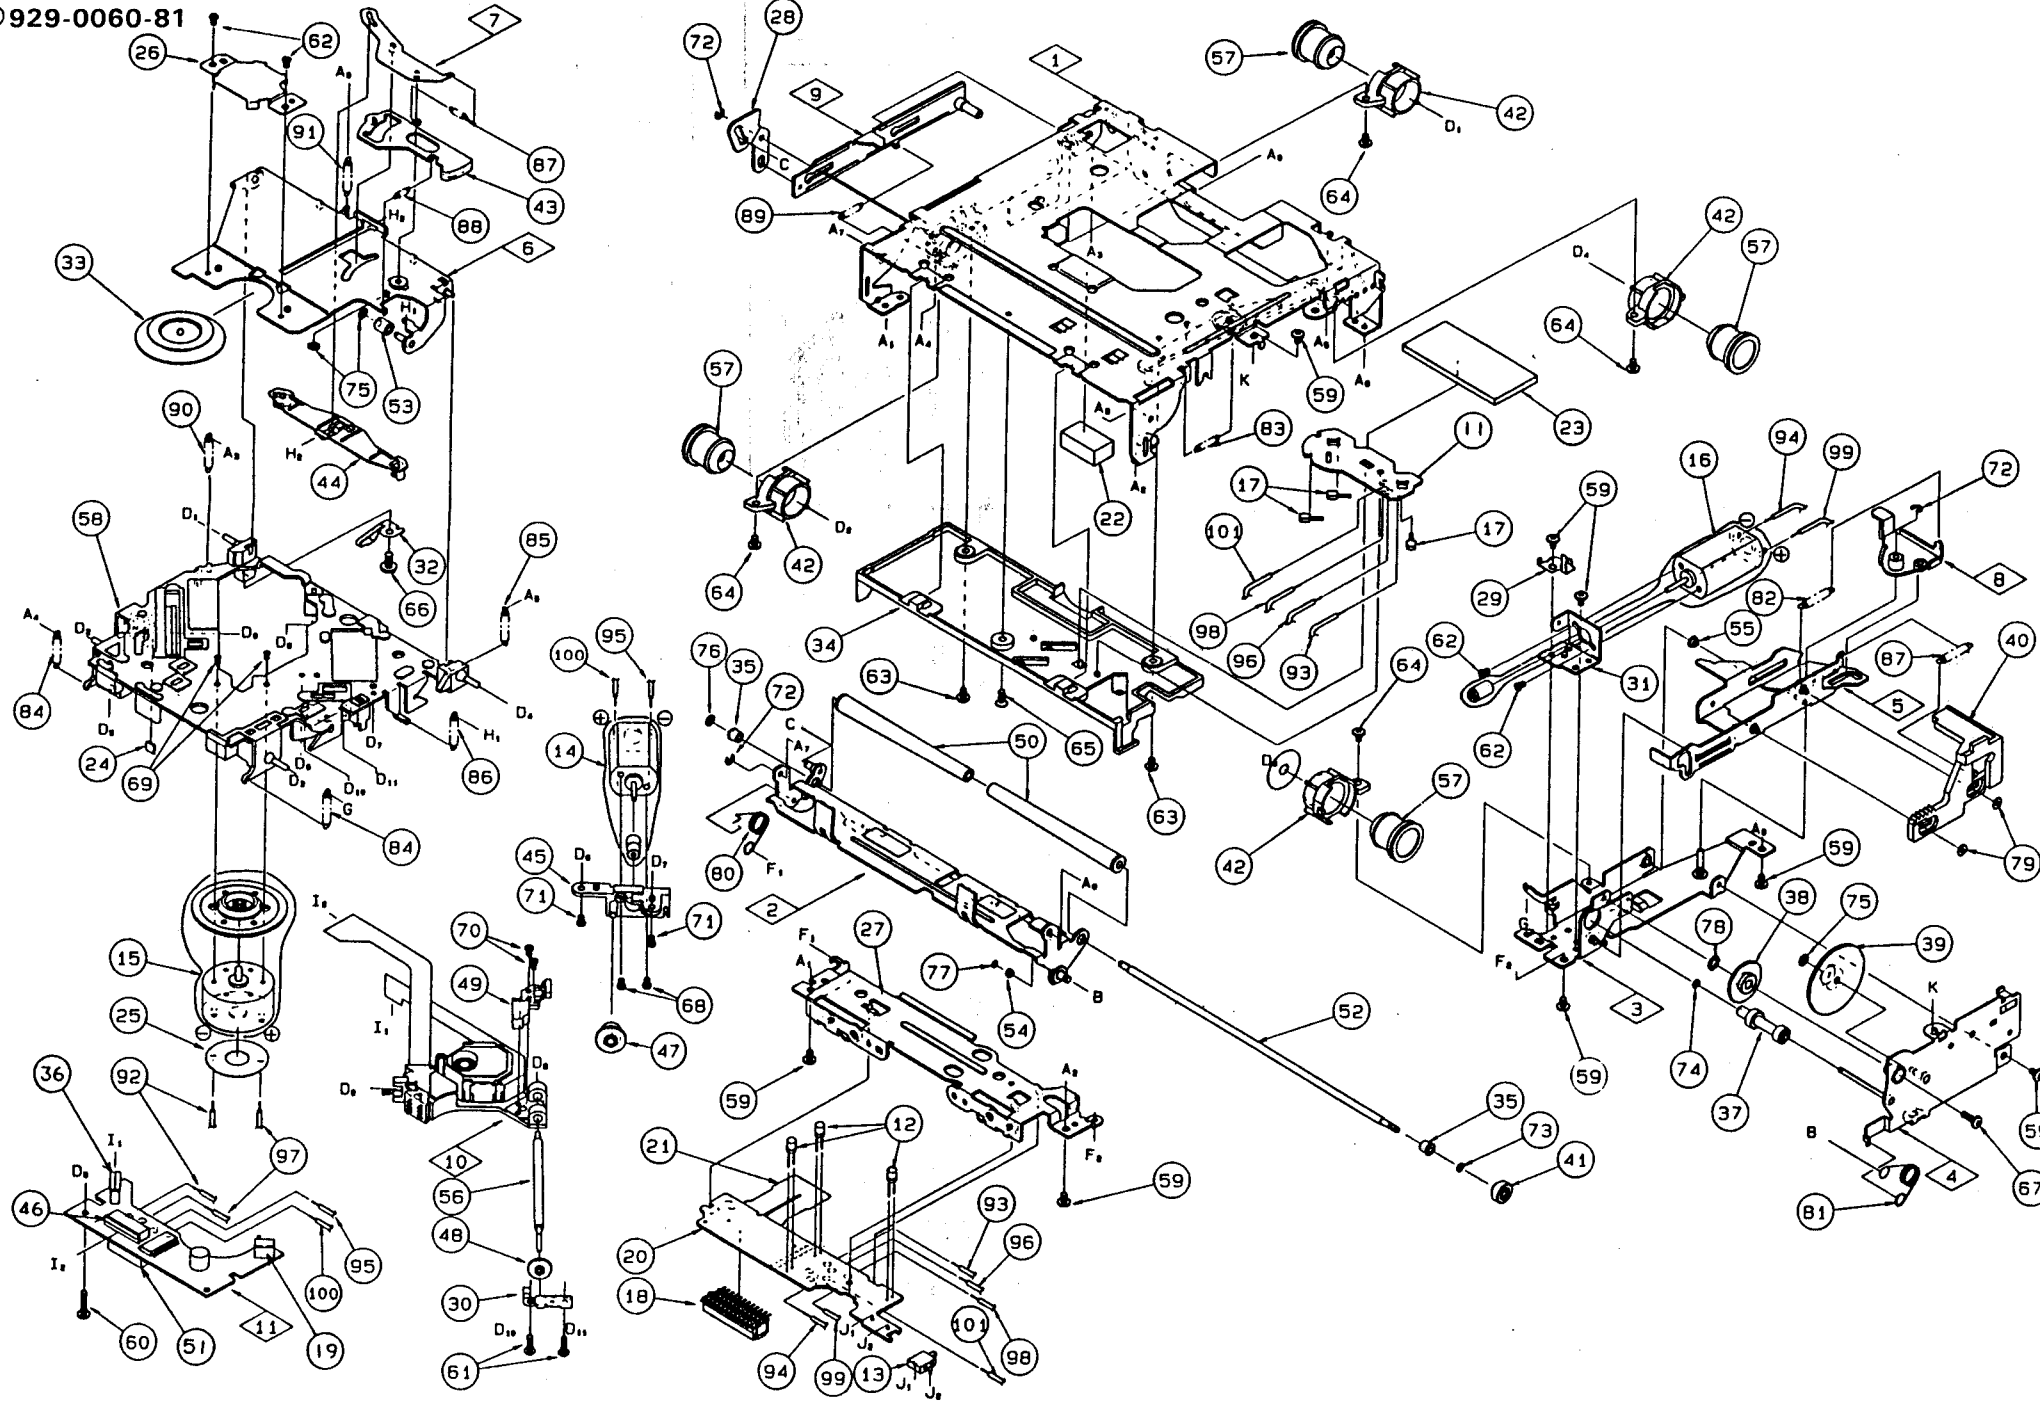

NO.	PART NO.	DESCRIPTION	QTY
25	347-3270-00	MOTOR SHEET	1
26	620-0190-03	CLAMPER PLATE	1
27	620-0485-03	FRONT PLATE	1
28	620-0488-01	S-L LINK PLATE	1
29	620-0489-01	MOTOR PLATE	1
30	620-0491-02	SPRING PLATE	1
31	620-0492-01	MOTOR BRACKET	1
32	620-0565-00	RATTLE PLATE	1
33	621-0205-02	CLAMPER RING	1
34	621-0242-02	U-DISC GUIDE	1
35	621-0243-02	ROLLER SLEEVE	2
36	074-0974-05	OUTLET SOCKET 5P	1
37	621-0245-02	GEAR A	1
38	621-0246-02	GEAR B	1
39	621-0247-99	GEAR C	1
40	621-0248-05	RACK GEAR	1
41	621-0249-02	ROLLER GEAR	1
42	621-0250-01	DAMPER HOLDER	4
43	621-0251-02	LOCK LINK	1
44	621-0252-03	DISC STOPPER	1
45	621-0253-01	MOTOR HOLDER	1
46	074-1048-62	OUTLET SOCKET 12P	1
47	621-0255-02	SECOND GEAR	1
48	621-0256-01	LS-GEAR	1
49	621-0257-03	SCREW HOLDER	1
50	621-0258-01	LOADING ROLLER	2
51	074-1048-67	OUTLET SOCKET 17P	1
52	622-1072-04	ROLLER SHAFT	1
53	622-1073-02	CLAMPER ROLLER	1
54	622-1074-00	L-D-G-ROLLER	1
55	622-1219-01	SHIFT ROLLER	1
56	624-0013-01	LEAD SCREW	1
57	629-0057-00	DAMPER-LCCD	4
58	629-0050-02	DRIVE PLATE	1
59	714-2003-81	MACHINE SCREW	8
60	714-2012-81	MACHINE SCREW	1
61	716-0675-00	SCREW	2
62	716-1468-00	SCREW	4
63	716-1507-00	SCREW	2
64	716-1670-00	SCREW	4
65	716-1677-00	SCREW	1
66	716-1685-00	SCREW	1
67	716-1704-00	SCREW	1
68	732-2004-11	SEMS SCREW	2
69	738-1722-17	PRECISION SCREW	2
70	739-1735-17	PRECISION SCREW	2
71	739-2030-17	PRECISION SCREW	2
72	743-1500-20	E-RING	3
73	746-0712-03	WASHER	1
74	746-0724-00	WASHER	1
75	746-0761-00	WASHER	3
76	746-0762-00	WASHER	1
77	746-0872-00	WASHER	1
78	746-0876-01	WASHER	1
79	746-0877-02	WASHER	2
80	750-3000-02	RO-SPRING L	1
81	750-3001-03	RO-SPRING R	1
82	750-3002-03	SHIFT SPRING	1
83	750-3004-00	S-ARM SPRING	1
84	750-3005-00	DR-SPRING F	2
85	750-3006-01	DR-SPRING R	1
86	750-3007-02	CLAMPER SPRING	1
87	750-3008-00	L-LINK SPRING	2
88	750-3009-00	ES-SPRING	1
89	750-3130-01	SIDE-L-SPRING	1
90	750-3164-00	DR-SPRING LR	1
91	750-3165-00	CENTER SPRING	1
92	800-4904-60	VINYL-COAT-WIRE 40mm	1
93	800-4910-60	VINYL-COAT-WIRE 100mm	1
94	800-4912-60	VINYL-COAT-WIRE 120mm	1
95	800-4916-60	VINYL-COAT-WIRE	1
96	801-4910-60	VINYL-COAT-WIRE 100mm	1
97	802-4906-60	VINYL-COAT-WIRE 60mm	1
98	802-4910-60	VINYL-COAT-WIRE 100mm	1
99	802-4912-60	VINYL-COAT-WIRE 120mm	1
100	802-4916-60	VINYL-COAT-WIRE	1
101	804-4910-60	VINYL-COAT-WIRE 100mm	1

NO.	PART NO.	DESCRIPTION	QTY
1	966-0300-05	CHASSIS-ASSY	1
2	966-0309-03	L-DISC-G-ASSY	1
3	966-0310-05	SFT-P-CH-ASSY	1
4	966-0311-03	GEAR-P-ASSY	1
5	966-0312-04	SHIFT-P-ASSY	1
6	966-0313-05	CLAMP LINK-ASSY	1
7	966-0314-00	STOP LINK ASSY	1
8	966-0358-01	DRIVE-L-PI-ASSY	1
9	966-0359-02	SIDE-L-PI-ASSY	1
10	969-0004-01	PICK UP UNIT	1
11	039-0269-00	RF PWB	1
12	001-0563-00	LED GL380	3

NO.	PART NO.	DESCRIPTION	QTY
13	013-3945-00	SWITCH	1
14	SMA-146-100	DC-MOTOR SLED	1
15	SMA-148-100	DC-MOTOR SPINDLE	1
16	SMA-147-100	DC-MOTOR LOADING	1
17	060-0252-01	PHOTO-IR PI4850F	3
18	074-1067-24	OUTLET SOCKET	1
19	013-3989-50	SWITCH LIMIT	1
20	039-0270-00	LED-PWB	1
21	039-0271-00	FLEX PWB LED	1
22	345-7513-01	CLAMPER SHEET	1
23	345-7514-00	S-PWB-SHEET	1
24	345-7583-00	SPACER	1