

XR-6600RDS/6700RDS

SERVICE MANUAL

AEP Model
UK Model

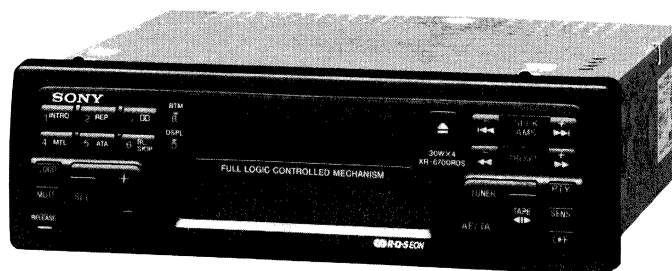


Photo : XR-6700RDS

| | |
|------------------------------------|-------------|
| Model Name Using Similar Mechanism | XR-C200MK2 |
| Tape Transport Mechanism Type | MG-50EX2-39 |

SPECIFICATIONS

Cassette player section

| | |
|-----------------------|--------------------------|
| Tape track | 4-track 2-channel stereo |
| Wow and flutter | 0.08 % (WRMS) |
| Frequency response | 30 – 18,000 Hz |
| Signal-to-noise ratio | |
| XR-6600RDS : | 58dB |
| XR-6700RDS : | |

| Cassette type | Dolby NR off | Dolby B NR |
|---------------|--------------|------------|
| TYPE II, IV | 61 dB | 67 dB |
| TYPE I | 58 dB | 64 dB |

Tuner section

FM

| | |
|------------------------|---------------------------------|
| Tuning range | 87.5 – 108.0 MHz |
| Antenna terminal | External antenna connector |
| Intermediate frequency | 10.7 MHz |
| Usable sensitivity | 8 dBf |
| Selectivity . . | 75 dB at 400 kHz |
| Signal-to-noise ratio | 65 dB (stereo), 68 dB (mono) |

| | |
|------------------------------|---------------------------------|
| Harmonic distortion at 1 kHz | 0.5 % (stereo), 0.3 % (mono) |
|------------------------------|---------------------------------|

| | |
|--------------------|----------------|
| Separation | 35 dB at 1 kHz |
| Frequency response | 30 – 15,000 Hz |
| Capture ratio | 2 dB |

MW/LW

| | |
|------------------------|--|
| Tuning range | MW: 531 – 1,602 kHz LW: 153 – 281 kHz |
| Antenna terminal | External antenna connector |
| Intermediate frequency | 10.71 MHz/450 kHz |
| Sensitivity | MW: 30 μ V LW: 50 μ V |

Power amplifier section

| | |
|----------------------|--|
| Outputs | Speaker outputs (sure seal connectors) |
| Speaker impedance | 4 – 8 ohms |
| Maximum power output | XR-6700RDS : 30 W \times 4 (at 4 ohms) XR-6600RDS : 25 W \times 4 (at 4 ohms) |

General

| | |
|----------------------|---|
| Outputs (XR-6700RDS) | Line output terminal Power amplifier control lead |
| Tone controls | Bass \pm 8 dB at 100 Hz Treble \pm 8 dB at 10 kHz |
| Power requirements | 12 V DC car battery (negative ground) |
| Dimensions | Approx. 188 \times 58 \times 177 mm (w/h/d) |
| Mounting dimension | Approx. 182 \times 53 \times 155 mm (w/h/d) |
| Mass | Approx. 1.2 kg |
| Supplied accessories | Parts for installation and connections (1 set) Front panel case (1) |


Design and specifications are subject to change without notice.




FM/MW/LW CASSETTE CAR STEREO
SONY®

TABLE OF CONTENTS

| <u>Section</u> | <u>Title</u> | <u>Page</u> |
|--------------------------------------|--|-------------|
| 1. GENERAL | | |
| | Location of Controls..... | 3 |
| | Setting the Clock | 3 |
| | Cassette Player Operation | 3 |
| | Radio Reception..... | 4 |
| | RDS Functions | 5 |
| | Other Functions | 7 |
| | Connections | 8 |
| 2. DISSASSEMBLY | | |
| 2-1. | Sub Panel Assy | 10 |
| 2-2. | Amplifier Board | 10 |
| 2-3. | Mechanism Deck Block | 11 |
| 2-4. | Main Board | 11 |
| 2-5. | Key Board | 12 |
| 3. ASSEMBLY OF MECHANISM DECK | | |
| 3-1. | Installing the Loading Gears | 13 |
| 3-2. | Installing the Reel Bracket | 13 |
| 3-3. | Installing the Mode Lever and Pinch Levers | 14 |
| 3-4. | Installing the Cassette Housing | 15 |
| 3-5. | Installing the Loading Lever | 15 |
| 3-6. | Positioning the Loading Levers | 16 |
| 3-7. | Installing the Gear (Loading F) | 16 |
| 4. MECHANICAL ADJUSTMENTS | | 17 |
| 5. ELECTRICAL ADJUSTMENTS | | |
| | Deck Section..... | 17 |
| | Tuner Section | 18 |
| 6. DIAGRAMS | | |
| 6-1. | IC Pin Description | 22 |
| 6-2. | Printed Wiring Boards—Main Section— | 24 |
| 6-3. | Schematic Diagram—Main Section— | 27 |
| 6-4. | Schematic Diagram—Amplifier Section— | 31 |
| 6-5. | Schematic Diagram—Panel Section— | 33 |
| 6-6. | Printed Wiring Board—Panel Section— | 35 |
| 7. EXPLODED VIEWS | | |
| 7-1. | Chassis Section..... | 40 |
| 7-2. | Front Panel Section | 41 |
| 7-3. | Mechanism Deck Section | 42 |
| 8. ELECTRICAL PARTS LIST | | 43 |

Dolby noise reduction manufactured under license from Dolby Laboratories Licensing Corporation.
 "DOLBY" and the double-D symbol  are trademarks of Dolby Laboratories Licensing Corporation.

Location of Controls

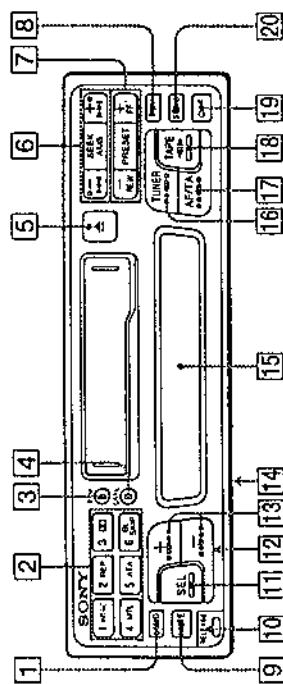

Refer to the pages in ● for further details.


- | | | | |
|----|--|----|--|
| 1 | LOUD (loudness) button ① | 11 | SEL (control mode select) button ⑤⑥⑦ |
| 2 | During radio reception: Preset number buttons ⑧ | 12 | Reset button (located on the front side of the unit hidden by the front panel) ④ Press this button when you use this unit for the first time, when you have changed the car battery, or when the buttons of this unit do not function properly. |
| 3 | INTRO button ③ | 13 | (volume/bass/treble/balance/fader control) button ⑨⑩ |
| 4 | REPEAT button ② | 14 | POWER SELECT switch (located on the bottom of the unit) See "POWER SELECT Switch" in the installation/connections manual |
| 5 | MTL (Cassette type select) button ④ | 15 | Display window |
| 6 | ATA (Automatic Tuner Activation) button ⑤ | 16 | TUNER (radio on/band select) button ⑥⑦ |
| 7 | BTM (Best Tuning Memory) button ⑩⑪ | 17 | AF/TA (alternative frequency/traffic announcement) button ⑤⑩⑪ |
| 8 | DSPL (display mode change/time set) button ⑥⑦⑧ | 18 | TAPE/◀▶ (playback/transport direction change) button ② |
| 9 | ▲ (eject) button ⑫ | 19 | OFF button ④⑤⑥ |
| 10 | SEEK/AMS button ③⑦⑧ | 20 | SENS (sensitivity adjust) button ⑦ |
| 11 | PRESET button ⑧⑨ | | |
| 12 | PTY (programme type) button ① | | |
| 13 | MUTE button ② | | |
| 14 | RELEASE (front panel release) button ④⑫ | | |

Setting the Clock

The clock has a 24-hour digital indication.



For example, setting it to 10:08

- 1 Display the time.
(Press the button during the unit operation.)
- 2 Press the button for more than two seconds.




The hour digit blinks.

Set the hour digits.





- 3 Press the button momentarily.




The minute digit blinks.

Set the minute digits.



- 4 Press the button momentarily.



The clock activates.

Note
If the POWER SELECT switch on the bottom of the unit is set to the position, the clock cannot be set unless the power is turned on. Set the clock after you have turned on the radio, or started cassette playback.

Cassette Player Operation


Listening to Tape Playback

After inserting the cassette, playback will start automatically.




If a cassette is already inserted, press the button to start playback. If you press during playback, the tape transport direction will change.

Indication of Tape Transport Direction



The side facing up is being played.



The side facing down is being played.


To stop playback,

eject the cassette by pressing the button or press the OFF button.

Playback stops also when you select radio by pressing the button.

Changing the Displayed Items

Each time you press the button, the displayed items change as follows:



Ejecting the Cassette

Press the button.


SECTION 1 GENERAL

EN

Cassette Player Operation

This section is extracted from
XR-6700RDS's instruction manual.

Fast-winding the Tape



To start playback during rewinding or fast-forwarding, press the **PLAY** button.

Playing a Tape Recorded in the Dolby B NR System

Press the **[3 DO]** button when you want to listen to a tape recorded in the Dolby B NR system. → "DO" appears in the display.

To cancel, press again.

Playing a CrO₂ or Metal Tape


Press the **[4 MT]** button when you want to listen to a CrO₂ (TYPE II) or metal (TYPE IV) tape. → "MTL" will appear on the display.

To cancel, press again.

Locating the Beginnings of the Tracks

→ AMS (Automatic Music Sensor) Function

During playback, press either side of the SEEK/AMS button the number of times you wish to skip the tracks.



To locate the previous tracks

To locate the succeeding tracks

Up to nine tracks can be skipped.

If the blanks between the tracks are shorter than four seconds, or if there are noises, the AMS function will not work. Also, the unit may read long sections of low volume music or quiet sections on a track as blanks between tracks.

Searching the Desired Track

→ Intro Scan Function

Press the **[1 INT]** button during playback. → "INTRO" appears on the display. The first 10 seconds of all the tracks are played. When you find the desired track, press the button once more. The unit returns to the normal playback mode.

Playing Tracks Repeatedly

→ Repeat Play Function

Press the **[2 REP]** button during playback. → "REP" appears on the display.

When the currently played track is over, it will be played again from the beginning. To cancel this mode, press the button again.

Radio Reception during Fast-forwarding or Rewinding of a Tape

→ ATA (Automatic Tuner Activation) Function

Press the **[5 ATA]** button during playback. → "ATA" appears on the display. When fast-forwarding or rewinding with the **[REW]** or **[FF]** button, the tuner will turn on automatically.

Skipping Blanks Automatically during Tape Playback

→ Blank Skip Function


Press the **[6 BL-SKIP]** button during playback. → "BL-SKIP" appears on the display. Blanks longer than eight seconds will be automatically skipped during tape playback.

Radio Reception

Searching for the Stations Automatically

→ Automatic Tuning

1 Select the desired band.



2 Press either side of the SEEK/AMS button to search for the station (automatic tuning).




For lower frequencies

For higher frequencies

The scanning stops when a station is received. Press either side of the button repeatedly until the desired station is received.

When an FM stereo program with a sufficient signal strength is tuned in,



To avoid the automatic tuning from stopping on stations too frequently (local seek mode), press the **[SENS]** button momentarily to get the "LCL" indication.

Only the stations with relatively strong signals can be tuned in. The local seek mode functions only when the automatic tuning is in operation.

Changing the Display Items

Each time you press the **[DISP]** button, the displayed items between frequency and time.

If FM Stereo Reception is Poor

→ Monoaural Mode

Press the **[SENS]** button momentarily. → "MONO" appears on the display. The sound will improve, but it will become monaural.

Tuning in by Adjusting the Frequency


→ Manual Tuning

1 Select the desired band.



2 Press and hold either side of the SEEK/AMS button.

Release the button when the desired station is received.



For lower frequencies

For higher frequencies

PREVENTING ACCIDENTS!

When tuning in during driving, use the automatic tuning and the memory preset search function (page 8) instead of the manual tuning.

Memorizing Stations Automatically

→ BTM (Best Tuning Memory) Function

This function selects from the currently received band the stations with the strongest signals and memorizes them in order of their frequency.

1 Select the desired band.




continue to next page →

Re-tuning the Same Programme Automatically

— Alternative Frequencies (AF)

The Alternative Frequencies (AF) function automatically selects and re-tunes the station with the strongest signal in a network. By using this function, you can continuously listen to the same programme during a long-distance drive without having to re-tune the station manually.

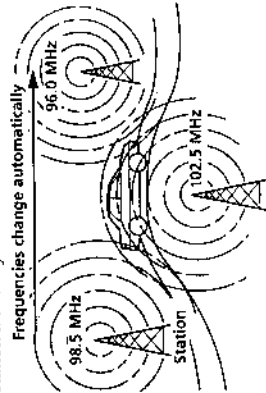

1 Select an FM station.

2 Press the **AF/TA** button until "AF ON" lights up in the display.


The unit starts searching for an alternative station with a stronger signal in the same network.

Note

When there is no alternative station in the area and you don't want to search for an alternative station, turn the AF function off by pressing the AF/TA button until "AF/TA Off" lights up.

Changing the Displayed Items

Each time you press the AF/TA button, the displayed items change as follows:



* Select this to turn on both AF and TA functions.

Notes

- "NO AF" and the station name flashes alternately, if the unit cannot find an alternative station in the network.
- If the station service name starts flashing after you've made the preset selection, it means that no alternative frequency is available and the unit cannot receive the PI (Programme Identification) data of the unmorized station. Press the SEEK/AMS button while the station service name is flashing (for about eight seconds) so the unit starts searching for a station with the same PI data, but with another frequency ("PI SEEK" lights up and no sound is heard). If the unit still cannot find an alternative station, "NO PI" lights up and the unit goes back to the original preset station.

RDS Functions

Overview of the RDS Function

Radio Data System (RDS) is a broadcasting service that allows FM stations to send additional digital information along with the regular radio programme signal. Your car stereo offers you a variety of services. Here are just a few: Re-tuning the same programme automatically, Listening to traffic announcements and Locating a station by programme type.

Notes


- Depending on the country or region, not all of the RDS functions are available.
- RDS may not work properly if the signal strength is weak or if the station you are tuned in is not transmitting RDS data.

Displaying the Station Name

The name of the station currently received lights up in the display.

Select an FM station.

When you tune in an FM station that transmits RDS data, the station name lights up in the display.




Note

The "R" indication means that an RDS station is being received.

Changing the Displayed Items

Each time you press the **SEEK/AMS** button, the displayed items change as follows:



Note

"NO NAME" lights up if the station received does not transmit RDS data.

Receiving the Memorized Stations

1 Select the desired band.




2 Press momentarily the preset number (1 to 6) button on which the desired station is stored.

Note

If you press the preset number button for more than two seconds, the currently received station will be memorized again. To receive the previously memorized station, make sure that the preset number button is pressed only momentarily.

Press either side of the **PRESET** button momentarily to receive in order the stations stored in the memory (Preset Search Function).



Press momentarily

1 -> 2 -> 3 -> 4 -> 5 -> 6 -> 1 -> ...



Press momentarily

1 -> 6 -> 5 -> 4 -> 3 -> 2 -> 1 -> ...

2 Press the **SEEK/AMS** button for more than two seconds.

- When there is no preset number indicated on the display window, stations will be stored on all preset number buttons on the currently selected band.
- When there is a preset number indicated on the display window, the unit will store stations on all preset number buttons from the one currently displayed.

For example, when you select FM2 and preset number 3 is displayed, the operation will start from preset number 3 on FM2, and will stop at preset number 6 on FM3.

Memorizing Only the Desired Stations

1 Select the desired band.



2 Tune in the station which you wish to store on the preset number button.

3 Keep the desired preset number button (1 to 6) pressed for about two seconds until you hear a beep tone.


The number of the pressed preset number button appears on the display window.

Up to 6 stations on each band (FM1, FM2, FM3, MW and LW) can be stored on the preset number buttons in order of your choice. Therefore, 18 stations can be memorized on FM.

If you try to store another station on the same preset number button, the previously stored station will be erased.

Listening to a Regional Programme

The "REG ON" (regional on) function of this unit lets you stay tuned to a regional programme without being switched to another regional station. (Note that you must turn the AF function on.) The unit is factory preset to "REG ON", but if you want to turn off the function, do the following:

Press the  button for more than two seconds until "REG OFF" lights up on the display.
Note that selecting "REG OFF" might cause the unit to switch to another regional station within the same network.

Note
This function does not work in the United Kingdom and in some other areas.


Local Link Function (United Kingdom only)

The Local Link function lets you select other local stations in the area, even though they are not stored in your presets.

- 1 Press a preset number button that has stored a local station.
- 2 Within five seconds, press again the preset number button of the local station.
- 3 Repeat this procedure until the desired local station is received.

Listening to Traffic Announcements

The Traffic Announcement (TA) and Traffic Programme (TP) data let you automatically tune in an FM station that is broadcasting traffic announcements even though you are listening to other programme sources.

Press the  button until "TA ON" or "AF/TA ON" lights up on the display. The unit starts searching for traffic information stations. "TP" lights up in the display when the unit finds a station broadcasting traffic announcements.
When the traffic announcement starts, "TA" flashes, then flashing stops when the traffic announcement is over.



Tip

When the traffic announcement starts while you are listening to another programme source, the unit automatically switches to the announcement and goes back to the original source when the announcement is over.

Notes



- "NO TP" flashes for five seconds if the received station doesn't broadcast traffic announcements. Then, the unit starts searching for a station that does broadcast traffic announcements.
- When the "EON" indication appears with "TP" in the display window, the current station makes use of broadcast traffic announcements of other stations in the same network.

To Cancel the Current Traffic Announcement

Press the  button momentarily. To cancel all traffic announcements, turn off the function by pressing the  button until "AF/TA OFF" lights up.

Presetting the Volume of traffic announcements

You can preset the volume level of the traffic announcements beforehand so you wouldn't miss the announcement. When a traffic announcement starts, the volume will be automatically adjusted to the preset level.

- 1 Select the desired volume level.
- 2 Press the  button while pressing the  button.
A beep sounds and the setting is stored.



Receiving Emergencies

If an emergency announcement comes in while you are listening to the radio, the programme will be automatically switched to the announcement. If you are listening to a source other than the radio, the emergency announcements will be heard if you set AF or TA to on. The unit will then automatically switch to these announcements no matter what you are listening to at the time.


Presetting the RDS Stations with the AF and TA Data

When you preset the RDS stations, the unit stores each station's data as well as its frequency, so you don't have to turn on the AF or TA function every time you tune in the preset station. You can select different setting (AF, TA, or both) for individual preset station or the same setting for all preset stations.

Presetting the Same Setting for all Preset Stations

- 1 Select an FM band.
- 2 Press the  button repeatedly and select either "AF ON", "TA ON" or "AF/TA ON" (for both AF and TA functions).
Note that selecting "AF/TA OFF" stores not only RDS stations, but also non-RDS FM stations.
- 3 Press the  button for more than two seconds.

Presetting different settings for each preset station

- 1 Select an FM band and tune in the desired station.
- 2 Press the  button repeatedly and select either "AF ON", "TA ON" or "AF/TA ON" (for both AF and TA functions).
- 3 Press the desired preset number button for two seconds until a beep sounds. Repeat from step 1 for presetting other stations.

Tip

If you want to change the preset AF and/or TA setting after you tune in the preset station, you can do so by turning on/off the AF or TA function.

Locating a Station by Programme Type

You can locate the station you want by selecting one of the programme types shown below.


Note


If the countries or regions where EON data is not transmitted, you can use this function only for the stations you have tuned in once.

| Programme types | Display |
|--------------------|----------|
| News | NEWS |
| Current Affairs | AFFAIRS |
| Information | INFO |
| Sport | SPORT |
| Education | EDUCATE |
| Drama | DRAMA |
| Culture | CULTURE |
| Science | SCIENCE |
| Varied | VARIED |
| Popular Music | POP M |
| Rock | ROCK M |
| Middle of the Road | M.O.R. M |
| Musical | MUSIC |
| Light Classical | LIGHT M |
| Classics | CLASSICS |
| Other Music Types | OTHER M |
| Not specified | NONE |


Note


You cannot use this function in some countries where no PTY (Programme Type selection) data is available.

- 1 Press the  button during FM reception until "PTY" lights up in the display.

 INFO

The current programme type name appears if the station is transmitting the PTY data. "----" appears if the received station is not an RDS station or if the RDS data has not been received.

- 2 Press the  button repeatedly until the desired programme type appears. The programme types appear in the order as shown in the above table. Note that you cannot select "NONE" (Not specified) for searching.

 SPORT

- 3 Press either side of the SEEK/AMS button.
The unit starts searching for a station broadcasting the selected programme type.

When the unit finds the programme, the programme type appears again for five seconds.
 "NO" and the programme type appear alternately for five seconds if the unit cannot find the programme type and it returns to the previous station.

Using RDS Data for Setting the Clock Automatically

By receiving CT (Clock Time) data, the clock of this unit can be set automatically.

During FM reception, press the **[2 REP]** button while pressing the **[MUTE]** button. → "CT" will be displayed, and the clock will be set.



To cancel the CT function, press these buttons again.

Notes

- The CT function may not work even though an RDS station is being received.
- The time set by the CT function may not be exact.

Other Functions

Adjusting the Sound Characteristics

- 1 Select the item you want to adjust by pressing the **[MUTE]** button repeatedly.
 VOL (volume) → BAS (bass) → TRE (treble) → BAL (balance) → FAD (fader) → VOL (volume) → ...
- 2 Adjust the selected item by pressing either the **[+]** or **[-]** button.
 Adjust within three seconds after selecting. (After three seconds the button will again serve as volume control button.)

Enjoying Bass and Treble even at Low Volume

— Loudness Function

Press the **[Loud]** button. → "LOUD" will appear on the display.
 Bass and treble will be reinforced. To cancel, press again.

Muting the Sound Quickly

— Mute Function

Press the **[MUTE]** button. → The "MUTE" indication flashes.
 The sound is muted at once. To restore the previous volume level, press again.

This function will be also cancelled when:

- the **[+]** or **[-]** button is pressed.
- ejecting a cassette by pressing the **[EJECT]** button during tape playback.

Muting the Beep Tone

Press the **[MUTE]** button while pressing the **[MUTE]** button.

To reobtain the beep tone, press these buttons again.

Changing the Illumination Colour

Press the **[1 MNE]** button while pressing the **[MUTE]** button.

You can choose the colour between amber and green.

Connections

Caution

- This unit is designed for negative ground 12 V DC operation only.
- Connect the power connecting cord ① to the unit and speakers before connecting it to the auxiliary power connector.
- Run all ground wires to a common ground point.

If Your Car has No Accessory Position on the Ignition Key Switch — POWER SELECT Switch

The illumination on the front panel is factory-set to be turned on even when the unit is not being played. However, this setting may cause some car battery wear if your car has no accessory position on the ignition key switch. To avoid this battery wear, set the POWER SELECT switch located on the bottom of the unit to the ① position, then press the reset button. The illumination is reset to stay off while the unit is not being played.

Note

The caution alarm for the front panel is not activated when the POWER SELECT switch is set to the ① position.

Connexions

Précautions

- Cet appareil est conçu pour fonctionner sur un courant continu de 12 V avec masse négative.
- Branchez le cordon d'alimentation ① sur l'appareil et les haut-parleurs avant de le brancher sur le connecteur d'alimentation auxiliaire.
- Rassembler tous les fils de terre en un point de masse commun.

Si l'appareil est utilisé dans une voiture dont la clé de contact n'a pas de position accessoires — Interrupteur POWER SELECT

L'éclairage du panneau avant est réglé en usine de manière à s'allumer même quand l'appareil ne fonctionne pas. Cependant, ce réglage risque d'épuiser la batterie si l'appareil est utilisé dans une voiture dont la clé de contact ne possède pas de position accessoires. Pour éviter d'épuiser la batterie, régler l'Interrupteur POWER SELECT sur le socle de l'appareil sur la position ①, puis appuyer sur la touche de réinitialisation. L'éclairage est réglé pour rester éteint quand l'appareil n'est pas utilisé.

Remarque

Quand l'Interrupteur POWER SELECT est réglé sur la position ①, l'avertisseur du panneau avant ne fonctionne pas.

Change the position with a jeweler's screwdriver, etc.
Changer la position avec un tournevis de joaillier ou un objet similaire.
Den Schalter mit einem kleinen Schraubenzieher o.ä. umstellen.
Cambiare la posizione con un cacciavite da gioielliere, ecc.

Anschluß

Vorsicht

- Dieses Gerät ist ausschließlich für eine negativ geerdete 12-V-Autobatterie bestimmt.
- Verbinden Sie das Netzverbindungskabel ① mit dem Gerät und den Lautsprechern, bevor Sie es mit dem Hilfsstromanschluß verbinden.
- Schließen Sie alle Erdungskabel an einen gemeinsamen Massepunkt an.

Wenn das Zündschloß Ihres Wagens keine Position I bzw. ACC besitzt — POWER SELECT-Schalter

Das Gerät ist werkseitig so voreingestellt, daß das Bedienfeld auch dann beleuchtet ist, wenn das Gerät nicht betrieben wird. Besitzt das Zündschloß Ihres Fahrzeugs keine Position I bzw. ACC, so ist die Beleuchtung ständig eingeschaltet und entzieht der Batterie Strom. Stellen Sie in einem solchen Fall den POWER SELECT-Schalter an der Unterseite des Geräts auf Position ①, und drücken Sie dann die Rücksetztaste. Bei ausgeschaltetem Gerät ist das Bedienfeld dann nicht mehr beleuchtet.

Hinweis

Der Warnton für die Frontplatte ertönt nicht, wenn der POWER SELECT-Schalter auf Position ① gestellt ist.

Collegamenti

Attenzione


- Questo apparecchio è stato progettato per l'uso solo a 12 V CC con massa negativa.
- Collegare il cavo di collegamento dell'alimentazione ① all'apparecchio e agli altoparlanti prima di collegarlo al connettore di alimentazione ausiliare.
- Portare tutti i cavi di massa a un punto di massa comune.

Quando si usa l'apparecchio in un'auto priva di posizione accessoria per la chiavetta di accensione — Interruttore POWER SELECT

L'illuminazione del pannello anteriore è stata predisposta in fabbrica per l'attivazione anche quando non si usa l'apparecchio. Tuttavia questa regolazione può causare scaricamento della batteria dell'auto se si usa l'apparecchio in un'auto priva di posizione accessoria per la chiavetta di accensione. Per evitare ciò, regolare su ① l'interruttore POWER SELECT situato alla base dell'apparecchio e quindi premere il tasto di azzeramento. L'illuminazione rimarrà così spenta finché l'apparecchio rimane spento.

Note

La suoneria di avvertimento per il pannello anteriore non suona quando l'interruttore POWER SELECT è in posizione ①.



Reset Button

When the installation and connections are over, be sure to press the reset button with a ballpoint pen etc.

Touche de réinitialisation


Quand l'installation et les connexions sont terminées, appuyer sur la touche de réinitialisation avec un stylo bille ou un objet pointu.

Rücksetztaste

Nach der Installation und dem Anschluß muß die Rücksetztaste mit einem Kugelschreiber o.ä. gedrückt werden.

Pulsante di azzeramento

Dopo avere terminato l'installazione e i collegamenti, assicurarsi di premere il pulsante di azzeramento con la punta di una penna a sfera ecc.



Reset button
Touche de réinitialisation
Rücksetztaste
Pulsante di azzeramento

Note on the control leads

The power antenna control lead (blue) supplies +12 V DC when you turn on the tuner or when you activate the ATA (Automatic Tuner Activation), AF (Alternative Frequency) or the TA (Traffic Announcement) Function.

Memory hold connection

When the yellow power input lead is connected, power will always be supplied to the memory circuit even when the ignition key is turned off.

Notes on speaker connection

- Before connecting the speakers, turn the unit off.
- Use speakers with an impedance of 4 to 8 ohms, and with adequate power handling capacities. Otherwise, the speakers may be damaged.
- Do not connect the terminals of the speaker system to the car chassis, and do not connect the terminals of the right speaker with those of the left speaker.
- Do not attempt to connect the speakers in parallel.
- Do not connect any active speakers (with built-in amplifiers) to the speaker terminals of the unit. Doing so may damage the active speakers. Therefore, be sure to connect passive speakers to these terminals.

Warning

If you have a power antenna without a relay box, connecting this unit with the supplied power connecting cord ① may damage the antenna.

Remarque sur les fils de contrôle

Le fil de contrôle (bleu) de l'antenne électrique fournit un courant continu de +12 V quand le tuner est allumé ou quand la fonction ATA (Activation automatique du tuner), AF (Fréquences alternatives) ou TA (annonces routières) est mise en service.

Connexion pour le maintien de la mémoire

Lorsque le fil d'entrée d'alimentation jaune est connecté, le circuit de la mémoire est alimenté en permanence même si la clé de contact est sur la position d'arrêt.

Remarques sur la connexion des haut-parleurs

- Avant de raccorder les haut-parleurs, mettre l'appareil hors tension.
- Utiliser des haut-parleurs ayant une impédance de 4 à 8 ohms et une capacité adéquate sous peine de les endommager.
- Ne pas raccorder les bornes du système de haut-parleurs au chassis de la voiture et ne pas connecter les bornes du haut-parleur droit à celles du haut-parleur gauche.
- Ne pas tenter de raccorder les haut-parleurs en parallèle.
- Ne pas connecter d'enceintes actives (avec amplificateurs intégrés aux bornes d'enceintes de cet appareil) aux bornes d'enceintes de cet appareil pour éviter de les endommager. Veiller à raccorder des enceintes passives.

Avvertimento

Se vous disposez d'une antenne électrique sans boîte de relais, le branchement de cet appareil au moyen du cordon d'alimentation fourni ① risque d'endommager l'antenne.

Hinweis zu den Steuerleitungen

Die (blaue) Motorantennen-Steuerleitung liefert eine Gleichspannung von +12 V, wenn der Tuner eingeschaltet, die ATA-Funktion (Automatic Tuner Activation), die AF-Funktion (Alternative Frequency) oder die TA-Funktion (Traffic Announcement) aktiviert ist.

Zur Stromversorgung des Speichers

Wenn das gelbe Stromversorgungs-kabel angeschlossen ist, wird der Speicher stets (auch bei ausgeschalteter Zündung) mit Strom versorgt.

Hinweise zum Lautsprecheranschluß

- Schließen Sie das Gerät aus, bevor Sie die Lautsprecher anschließen.
- Verwenden Sie Lautsprecher mit einer Impedanz zwischen 4 und 8 Ohm und ausreichender Belastbarkeit. Ansonsten können die Lautsprecher beschädigt werden.
- Verbinden Sie die Lautsprecheranschlüsse nicht mit dem Wagenchassis, und verbinden Sie auch nicht die Anschlüsse des rechten mit denen des linken Lautspeakers.
- Versuchen Sie nicht, Lautsprecher parallel anzuschließen.
- An die Lautsprecheranschlüsse dieses Geräts dürfen nur Passivlautsprecher angeschlossen werden. Schließen Sie keine Aktivlautsprecher (Lautsprecher mit eingebauten Verstärkern) an, da diese sonst beschädigt werden können.

Warning

Wenn Sie eine Motorantenne ohne Relaisbox verwenden, kann durch Anschließen dieses Geräts mit Hilfe des mitgelieferten Netzverbindungskabels ① die Antenne beschädigt werden.

Note sui cavi di collegamento

Il cavo di controllo antenna automatico (blu) fornisce +12 V CC quando si accende il sintonizzatore, quando si attiva la funzione ATA (attivazione automatica del tuner), la funzione AF (frequenze alternative) o la TA (annunce sul traffico).

Collegamento per la conservazione della memoria

Quando il cavo di ingresso alimentazione giallo è collegato, viene sempre fornita alimentazione al circuito di memoria anche quando la chiavetta di accensione è spenta.

Note sul collegamento dei diffusori

- Prima di collegare i diffusori spegnere l'apparecchio.
- Usare diffusori di impedenza compresa tra 4 e 8 ohm e con capacità di potenza adeguata, altrimenti i diffusori possono essere danneggiati.
- Non collegare i terminali del sistema diffusori al telaio dell'auto e non collegare i terminali di diffusori destro a quelli del diffusore sinistro.
- Non collegare i diffusori in parallelo.
- Non collegare alcun diffusore attivo (con amplificatore incorporato) ai terminali diffusori dell'apparecchio perché questo può danneggiare i diffusori attivi. Assicurarsi di collegare i diffusori passivi a questi terminali.

Avvertenza


Se l'antenna che collega l'apparecchio al cavo di alimentazione in dotazione ① non ha la scatola di relay antenna, il può danneggiare.

Connections of Example

Connexions de l'exemple

Anschlußbeispiel


Esempi di Collegamento

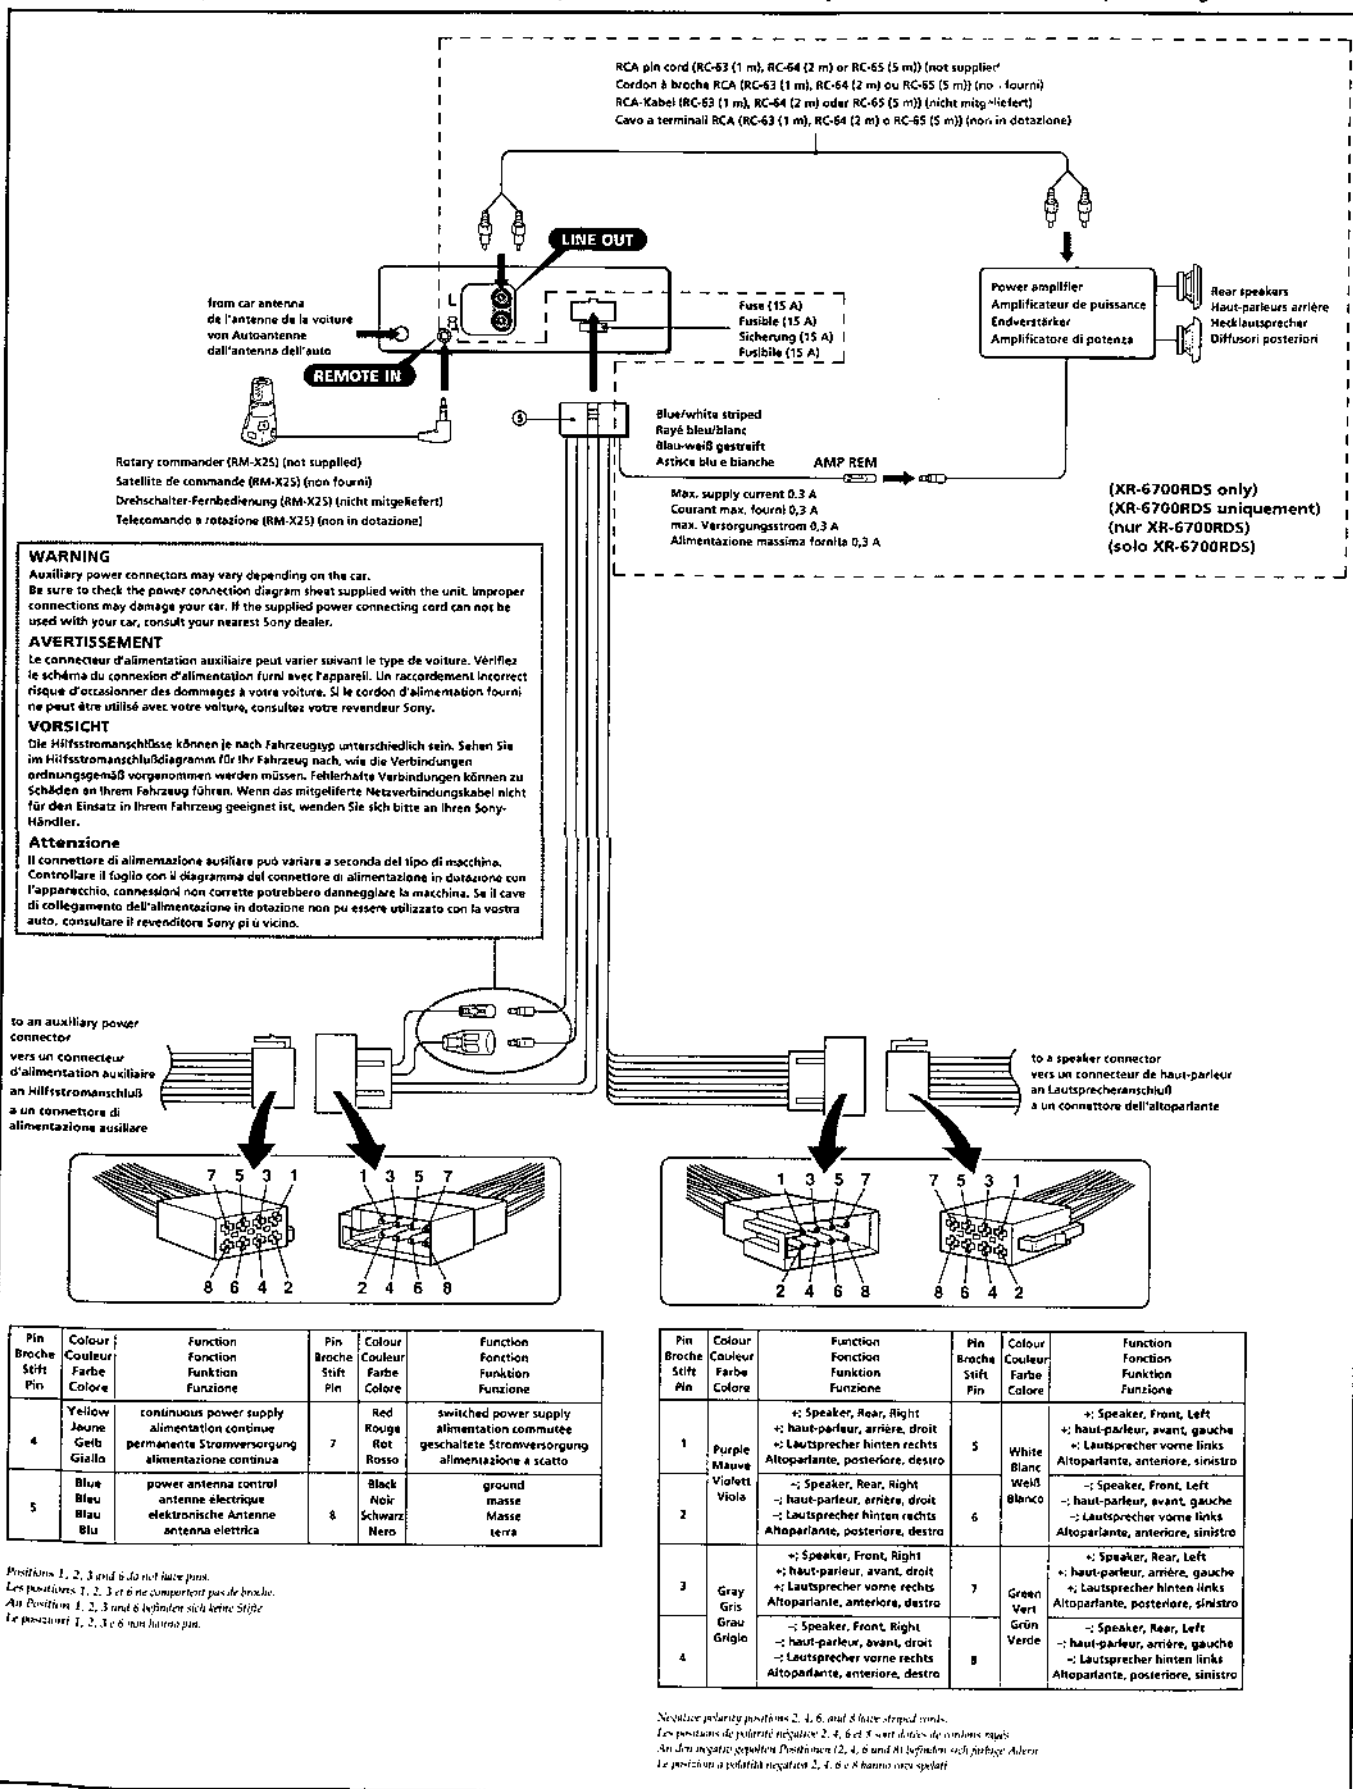


SECTION 2 DISASSEMBLY

Note : Follow the disassembly procedure in the numerical order given.


2-1. SUB PANEL ASSY

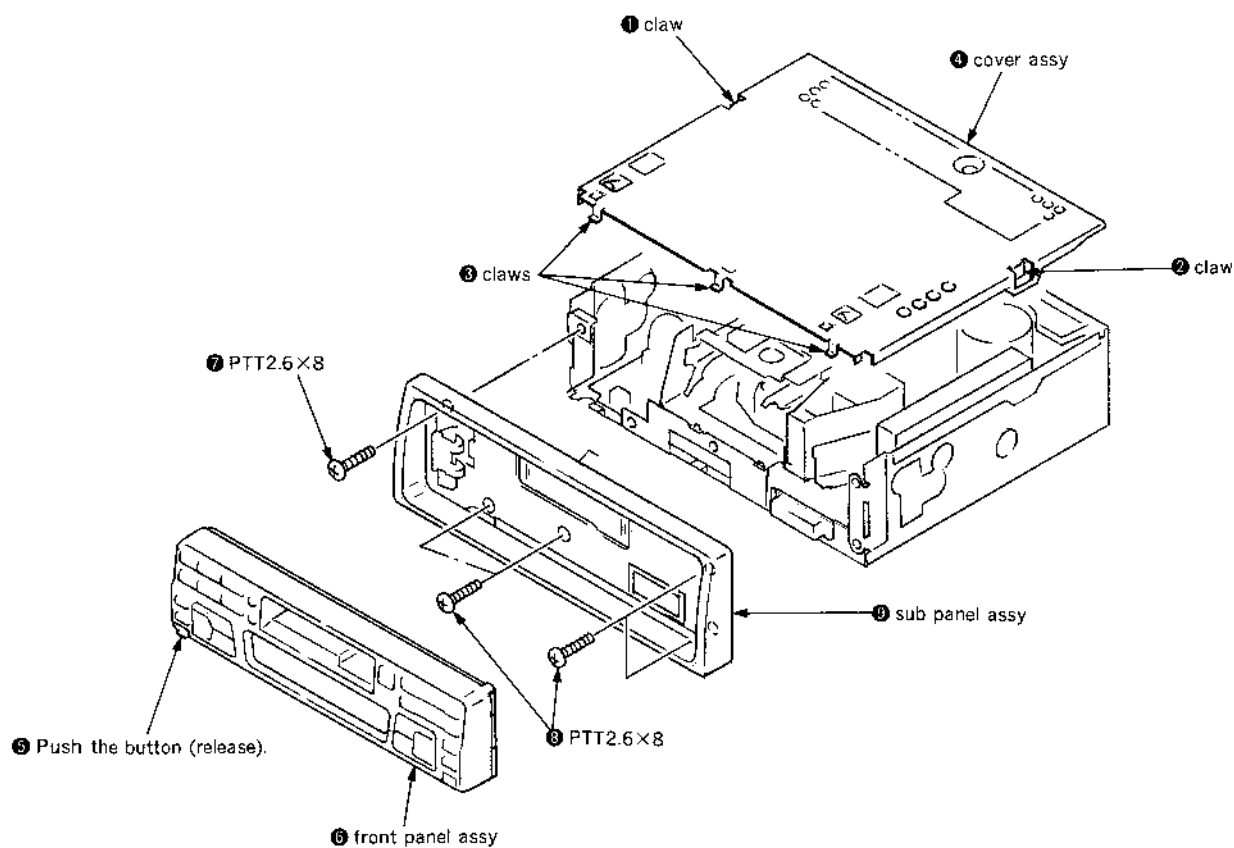


2-2. AMPLIFIER BOARD

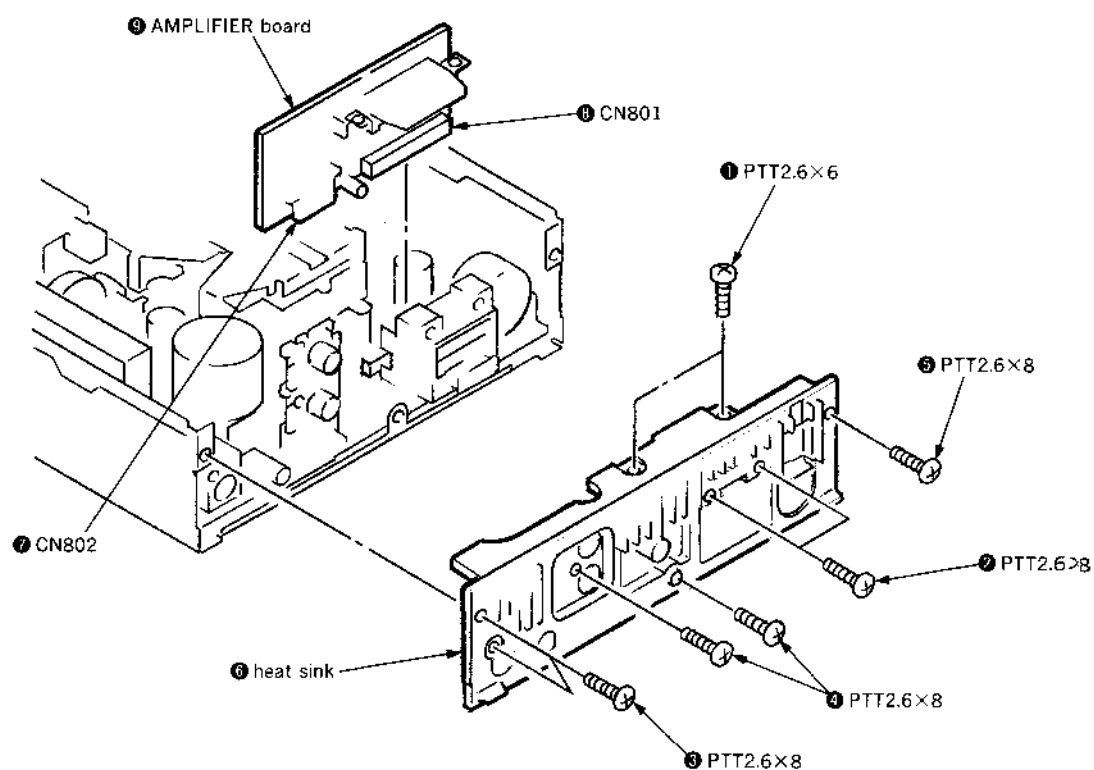


2-3. MECHANISM DECK BLOCK

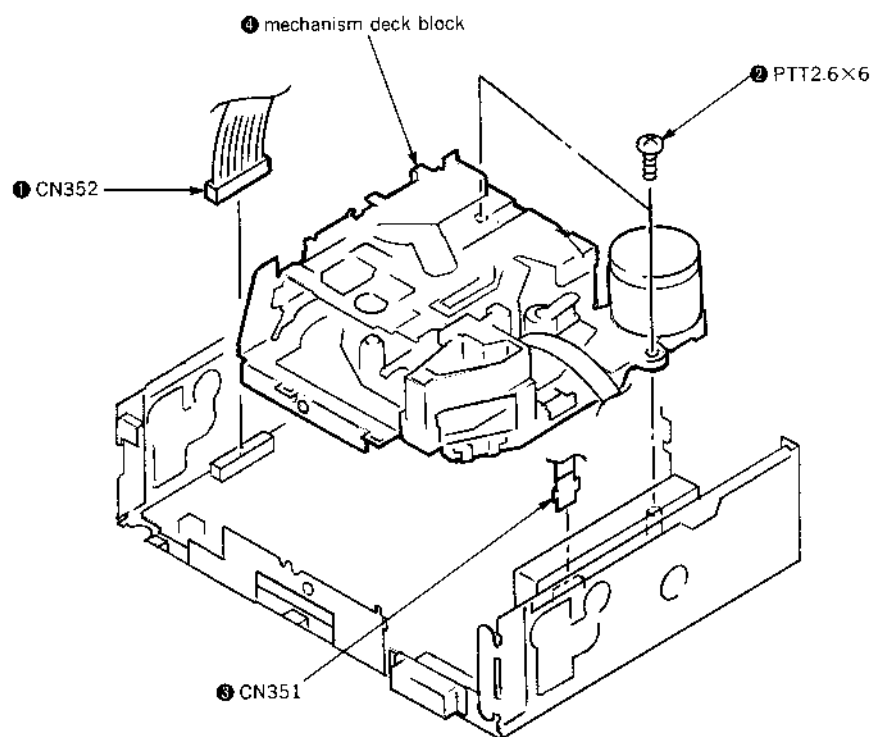

2-4. MAIN BOARD

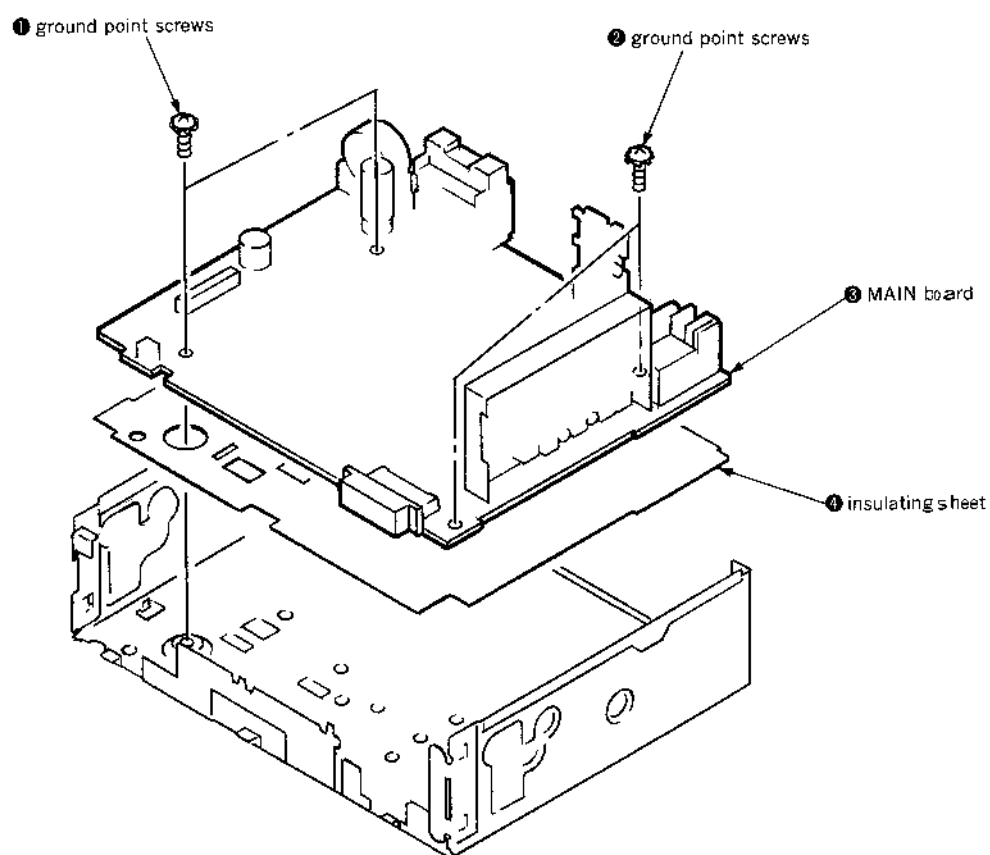


2-5. KEY BOARD

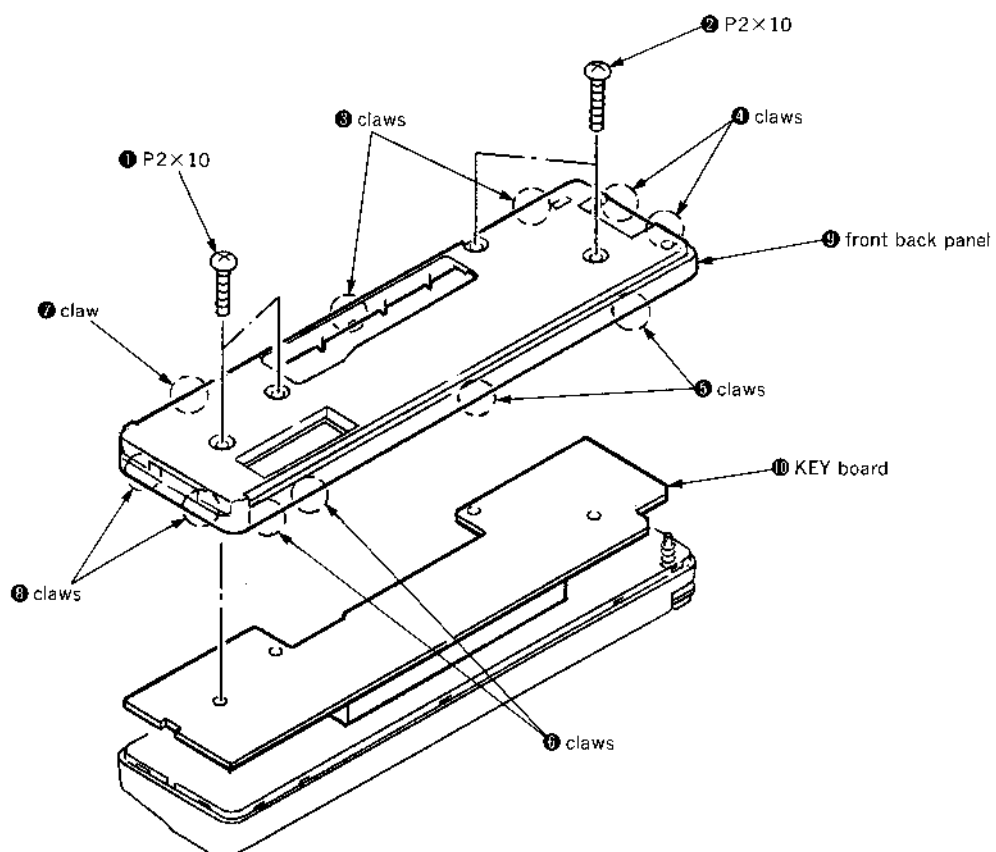


SECTION 3 ASSEMBLY OF MECHANISM DECK

Note: Follow the assembly procedure in the numerical order given.


3-1. INSTALLING THE LOADING GEARS

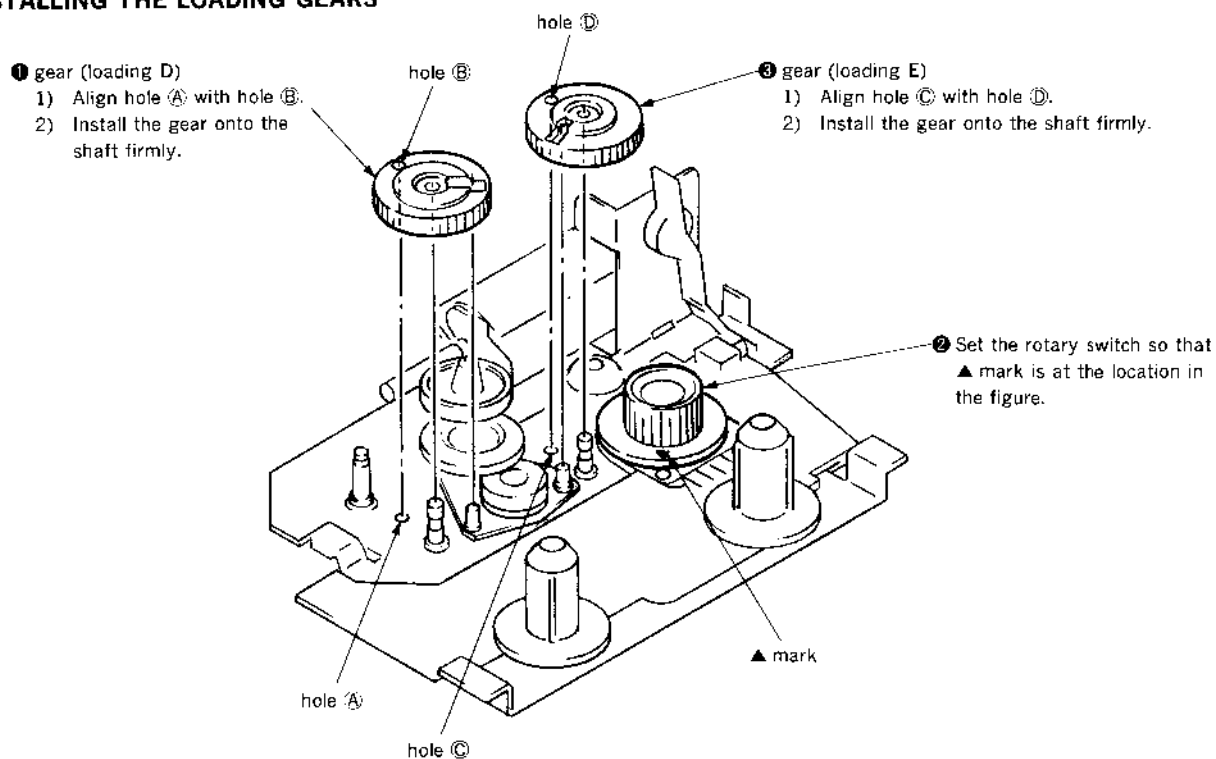

3-2. INSTALLING THE REEL BRACKET

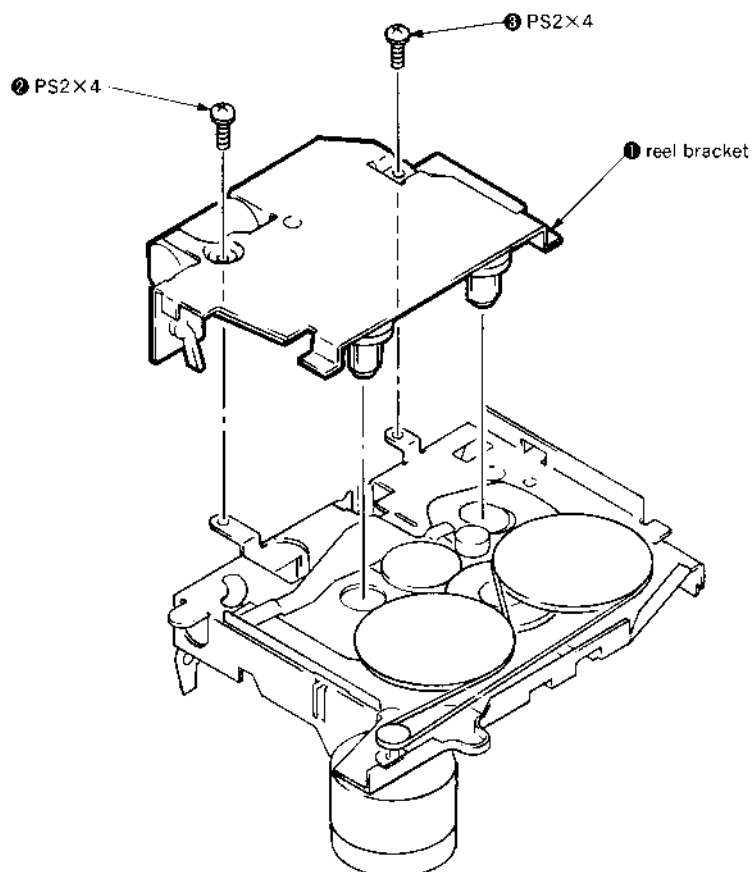

3-3. INSTALLING THE MODE LEVER AND PINCH LEVERS

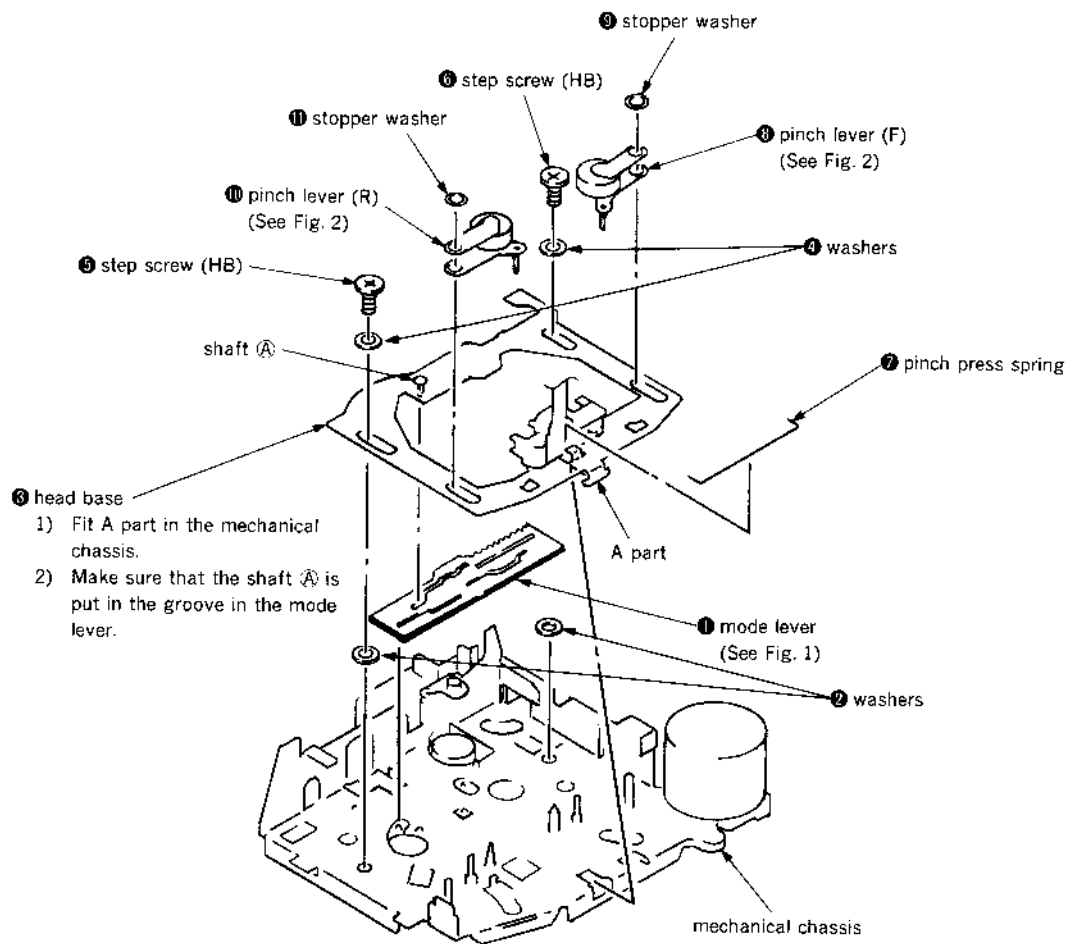

- 1) Align ● mark on the rotary switch with hole on the mode lever.
- 2) Make sure that the two shafts and three projections are located as shown below.

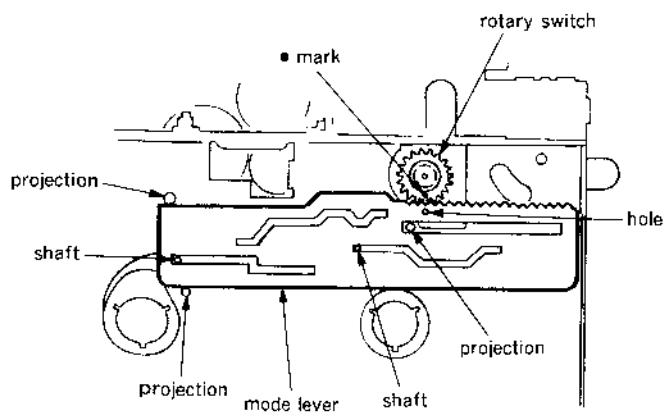


Fig. 1

- 1) Put the shafts of the pinch levers in the pinch press spring on its head side.


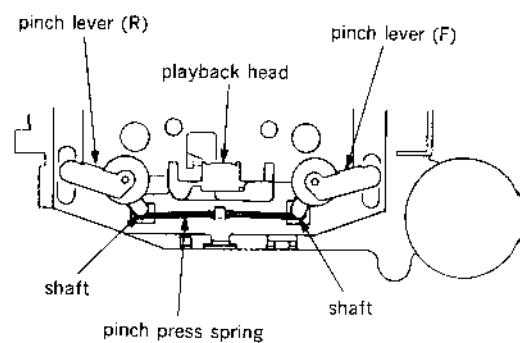


Fig. 2

3-4. INSTALLING THE CASSETTE HOUSING

③ housing hanger

- 1) Fit three projections in holes on the mechanical chassis.
- 2) Bend C part in the direction of the arrow and fasten to prevent dislocation from the chassis.

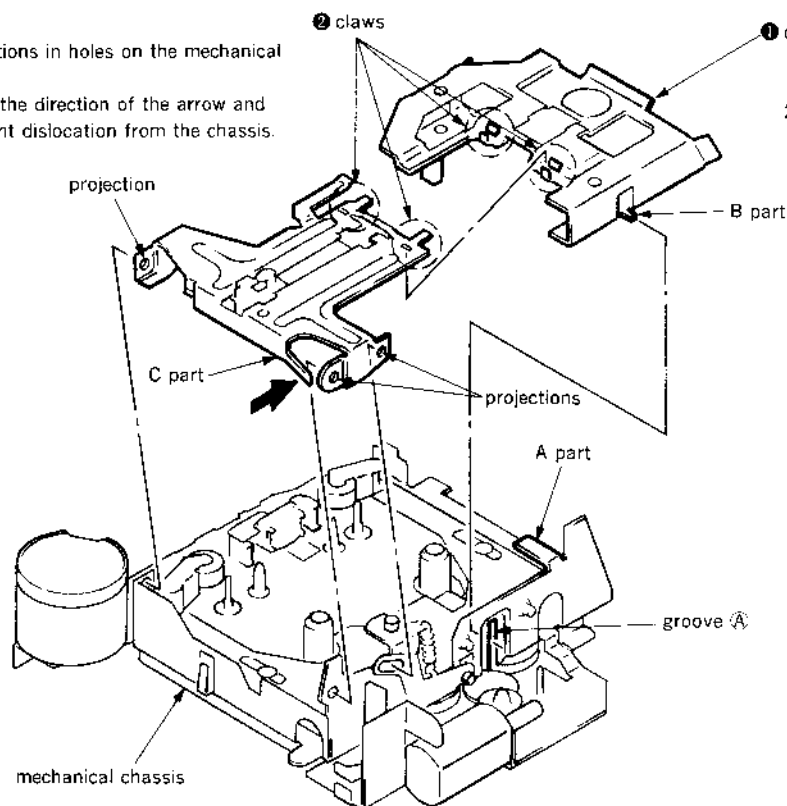


① cassette housing

- 1) Put the cassette housing under A part.
- 2) Fit B part in groove A.


3-5. INSTALLING THE LOADING LEVER

① suction arm


- 1) Align with axis (A) and install the arm onto the claw.
- 2) With the claw in the center, rotate the arm so as to be directed along axis (B), then fit the arm on the projection.

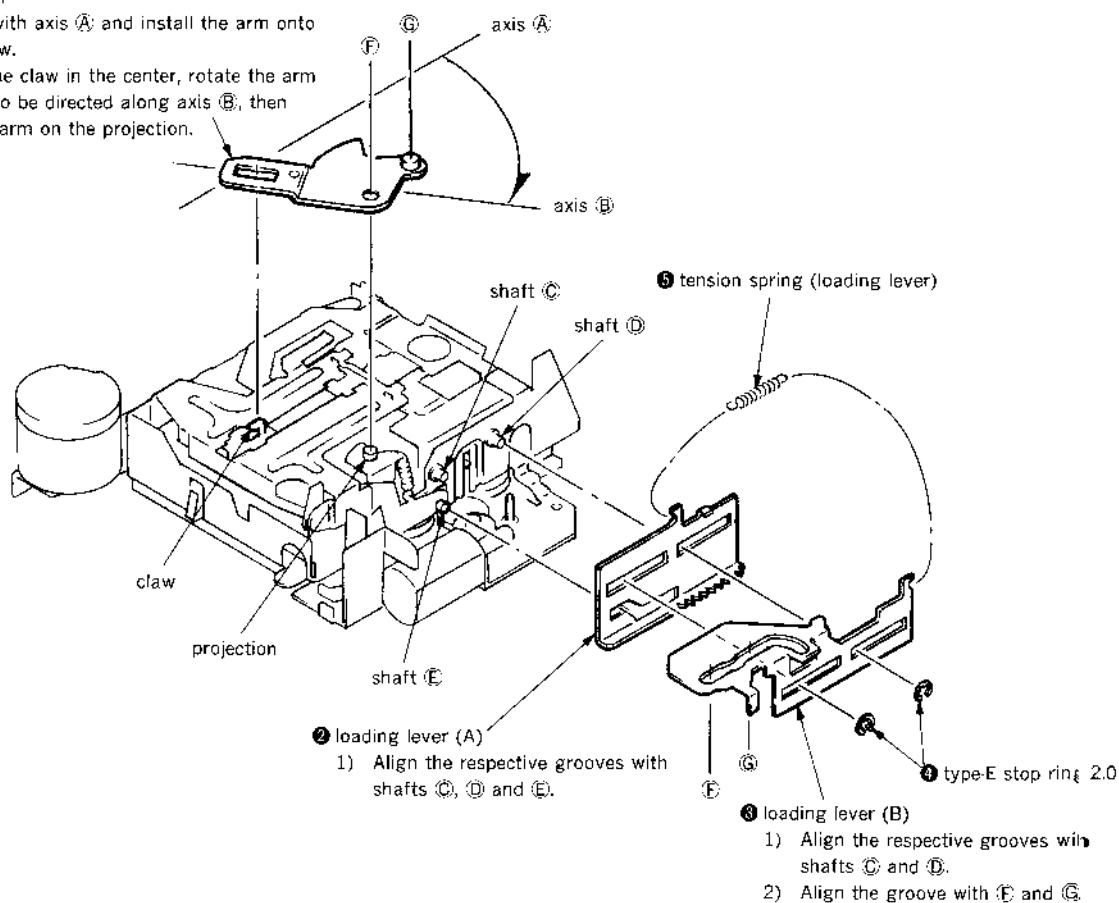

3-6. POSITIONING THE LOADING LEVERS

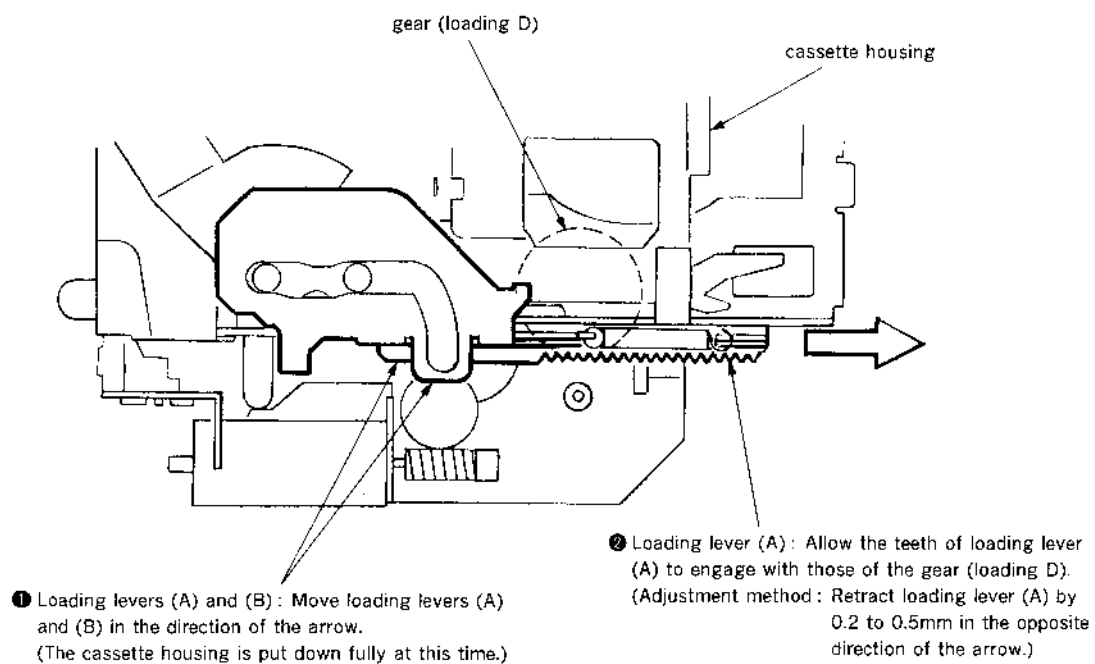

3-7. INSTALLING THE GEAR (LOADING F)

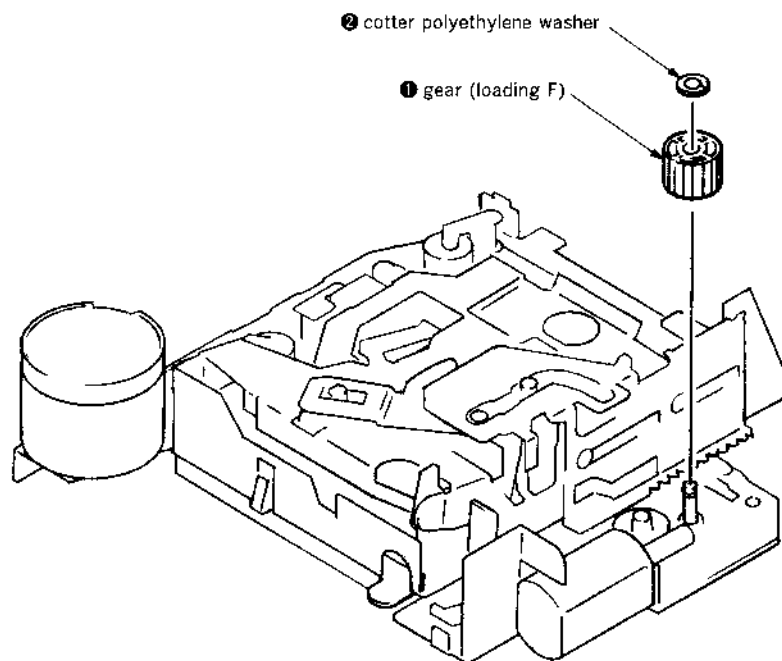

SECTION 4 MECHANICAL ADJUSTMENTS

PRECAUTION

- Wipe the following components with an absorbent cotton cloth moistened with alcohol before adjustment:
 PB head Pinch roller
 Idler Rubber belt
 Capstan
- Demagnetize the PB head using a head demagnetizer.
- Be careful not to use a magnetized screwdriver.
- After the adjustment is completed, lock the adjustment parts using screws.
- Unless otherwise specified, make adjustments at the specified voltage (14.4V).

Torque Measurement

| Mode | Torque Meter | Meter Reading |
|---------------------|--------------|------------------------------------|
| FWD | CQ-102C | 30—65g·cm (0.42—0.90 oz·inch) |
| FWD Back Tension | | 0.5—4.5g·cm (0.01—0.06 oz·inch) |
| REV | CQ-102RC | 30—65g·cm (0.42—0.90 oz·inch) |
| REV Back Tension | | 0.5—4.5g·cm (0.01—0.06 oz·inch) |
| FF, REW | CQ-201B | 60—200g·cm (0.83—2.78 oz·inch) |

Tape Tension Measurement

| Mode | Tension Meter | Meter Reading |
|------|---------------|--------------------------------------|
| FWD | CQ-403A | more than 90g (more than 3.18 oz) |
| REV | CQ-403R | |

SECTION 5 ELECTRICAL ADJUSTMENTS

TEST MODE

This set have the test mode function. In the test mode, FM Auto Scan/Stop Level and MW Auto Scan/Stop Level adjustments can be performed easier than it in ordinary procedure.

<Set the Test Mode>

- Set the "OFF" mode.
- Push the preset **[4]** button.
- Push the preset **[5]** button.
- Press the preset **[1]** button for more than two seconds.
- Then the display indicates all lights, the test mode is set.

<Release the Test mode>

- Push the "OFF" button.

See the adjustment location from on page 21 for the adjustment.


DECK SECTION

0dB=0.775V

Tape Speed Adjustment

Procedure :

- Put the set into the FWD PB mode.

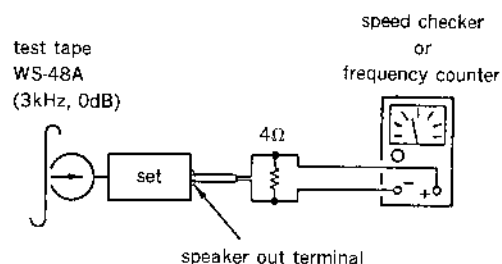

Specification : Constant speed

| Speed checker | Frequency counter |
|---------------|-------------------|
| -1.5 to +2.5% | 2,955 to 3,075Hz |


Adjustment Location : See page 21.

DOLBY Level Adjustment (XR-6700RDS only)

Setting :

Preset **[3]** (DOLBY) button : OFF

SEL (BAS) button : Center
 SEL (TRE) button : Center
 SEL (BAL) button : Center
 SEL (FAD) button : Center
 SEL (VOL) button : Maximum

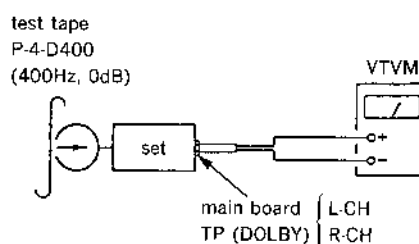

Procedure :

- Put the set into the FWD PB mode.
- Adjust RV301 (R-CH) and RV401 (L-CH) so that VTVM reading is $\pm 6 \pm 0.5$ dB (0.37 to 0.41V).

Adjustment Location : See page 21.

TUNER SECTION

0dB=1 μ V


Cautions during repair

When the front end is defective, replace it by a new one because its internal block is difficult to repair.

FM Auto Scan/Stop Level Adjustment

Setting :

TUNER button : FM

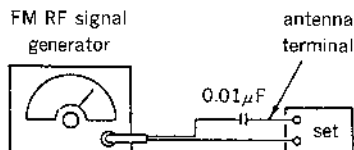


Carrier frequency : 98.00MHz
Output level : 22dB (12.6 μ V)
Mode : mono
Modulation : 1kHz, 22.5kHz deviation

Procedure :

1. Set to the test mode. (See page 17.)
2. Push the **TUNER** button and set to FM.


Display

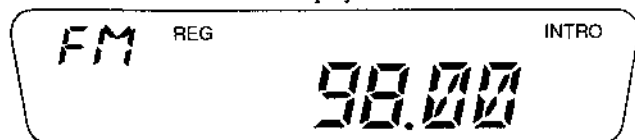

3. Adjust with the volume RV2 on TU1 so that the "FM" indication turns to "FM0" indication on the display window.

But, in case of already indicated "FM0", turn the RV2 so that put out light "0" indication and adjustment.

Display

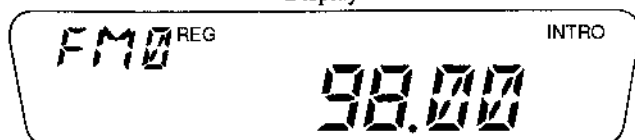


Adjustment Location : See page 21.

FM Stereo Separation Adjustment

Setting :

TUNER button : FM

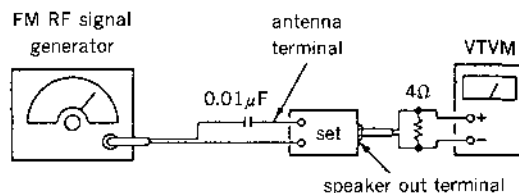

Carrier frequency : 98.00MHz
Output level : 70dB (3.2mV)
Mode : stereo
Modulation : main : 1kHz, 20kHz deviation (53%)
sub : 1kHz, 20kHz deviation (53%)
19kHz pilot : 7.5kHz deviation (10%)

Procedure :

| FM stereo signal generator output channel | VTVM connection | VTVM reading (dB) |
|---|-----------------|---|
| L-CH | L-CH | Ⓐ |
| R-CH | L-CH | Ⓑ Adjust RV4 on TU1 for minimum reading. |
| R-CH | R-CH | Ⓒ |
| L-CH | R-CH | Ⓓ Adjust RV4 on TU1 for minimum reading. |

L-CH Stereo separation : Ⓐ - Ⓑ

R-CH Stereo separation : Ⓒ - Ⓓ

The separations of both channels should be equal.


Specification : Separation more than 30dB

Adjustment Location : See page 21.

FM Noise Focus Adjustment

Setting :

TUNER button : FM

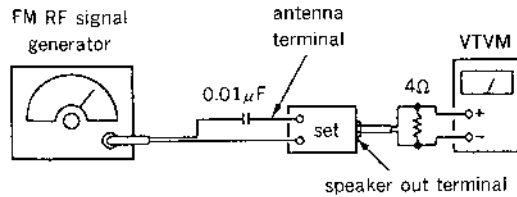

Carrier frequency : 98.00MHz
Output level : 60dB (1mV)
Mode : mono
Modulation : 1kHz, 75kHz deviation

Procedure :


1. Tune the 98.00MHz.
2. The then output level is supposing that (B) dB.
3. Adjust with the volume RV3 on TU1 so that the output level is (B) 32dB then signal generator input set to -20dB.

Adjustment Location : See page 21.

FM Signal Meter Adjustment

Setting :


TUNER button : FM

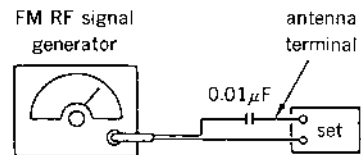


Carrier frequency : 98.00MHz
Output level : 35dB (56.2μV)
Mode : mono
Modulation : no modulation

Procedure :

1. Set to the test mode. (See page 17.)
2. Push the **TUNER** button and set to FM.

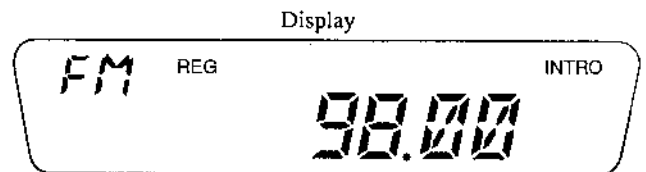

3. Push the preset **6** button.
4. Adjust RV1 so that the display indication is "118".

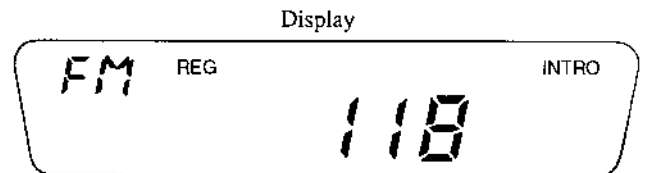


Specification : Display indication : 116 to 120

Adjustment Location : See page 21.

MW Auto Scan/Stop Level Adjustment

Setting :


TUNER button : MW

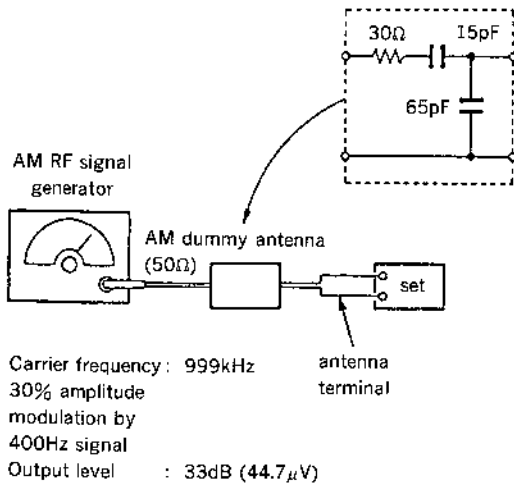

Procedure :

1. Set to the test mode. (See page 17.)
2. Push the **TUNER** button and set to MW.


Display

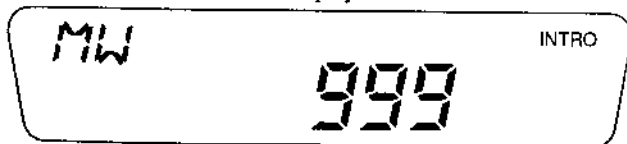

3. Adjust with the volume RV1 on TU1 so that the "MW" indication turns to "MW0" indication on the display window.

But, in case of already indicated "MW0", turn the RV1 so that put out light "0" indication and adjustment.


Display

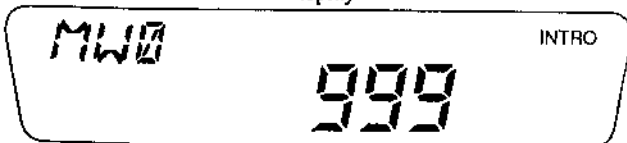


Adjustment Location : See page 21.

Adjustment Location :

—SET UPPER VIEW—

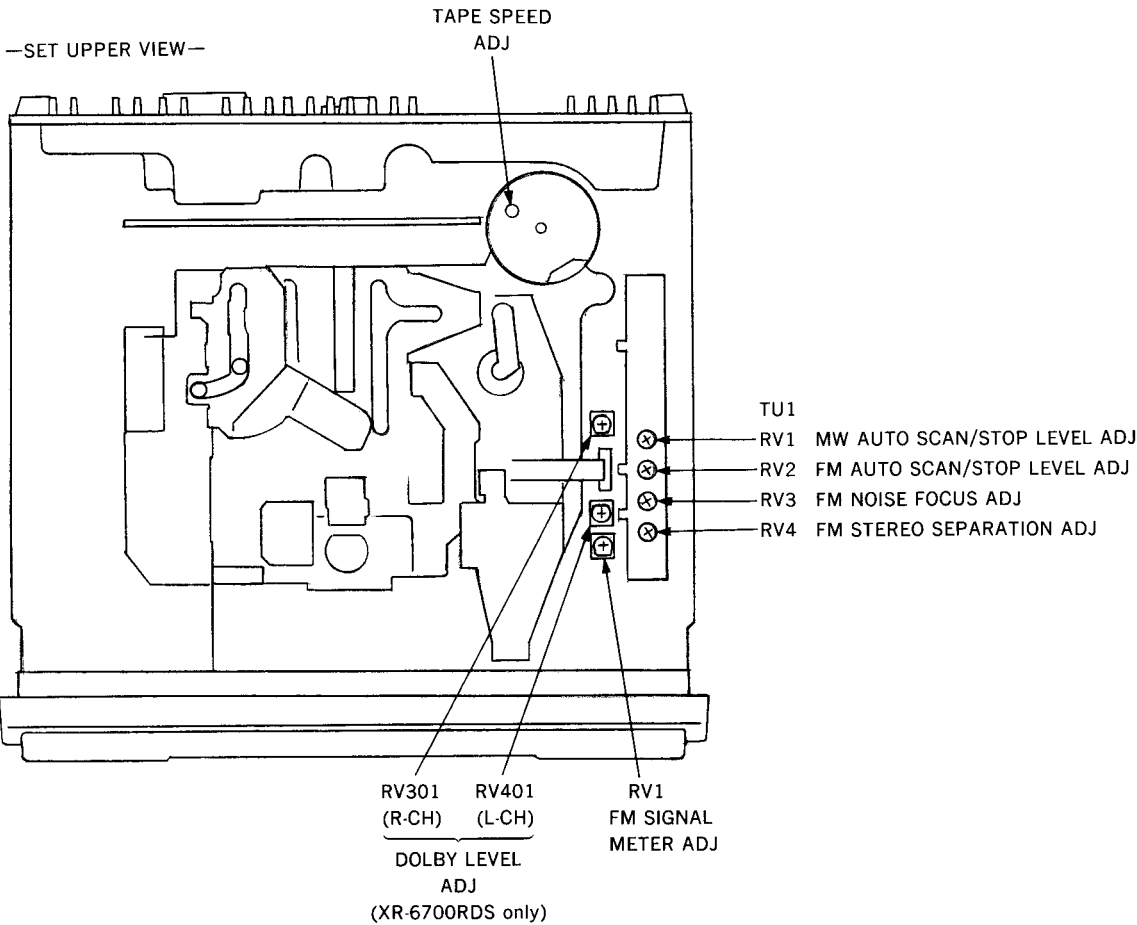

—SET LOWER VIEW—

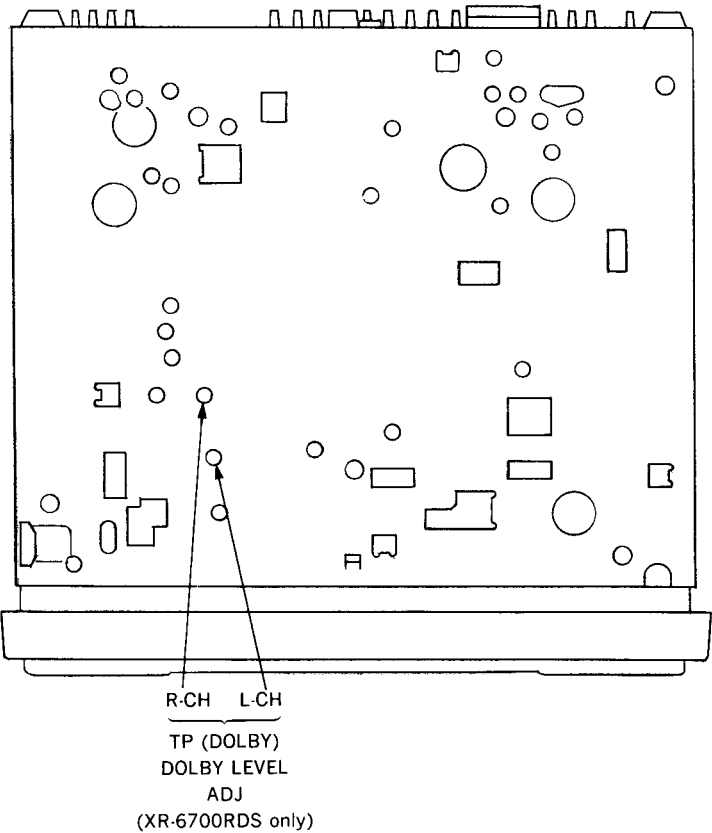



SECTION 6 DIAGRAMS

6-1. IC PIN DESCRIPTION

● IC501 MN1884820S3N (System Control)


| Pin No. | Pin Name | I/O | Pin Description |
|---------|----------|-----|---|
| 1 | TUNMUT | O | TUNER MUTE output terminal |
| 2 | AMPON | O | Power amplifier power control output terminal |
| 3 | ILLON | O | Illumination power control output terminal |
| 4 | PW ON | O | System power control output terminal |
| 5 | AMPMUT | O | Power amplifier mute control output terminal |
| 6 | RCIN1 | I | Rotary Commander Shift input terminal |
| 7 | VDD | — | Power terminal |
| 8 | X IN | I | Connection oscillator 8MHz cera-lock |
| 9 | X OUT | O | Connection oscillator 8MHz cera-lock |
| 10 | GND | — | GND |
| 11 | XT IN | I | 32kHz crystal connection |
| 12 | XT OUT | O | 32kHz crystal connection |
| 13 | EX2 | — | Connect to GND. |
| 14 | RESET | — | Reset input terminal. "L" for Reset. |
| 15 | RDCKI | I | RDS-CLK input terminal |
| 16 | BU IN | I | BACK-UP detection input terminal |
| 17 | KEYACK | I | Key input acknowledge terminal |
| 18 | VOLSO | O | Electric volume serial data output terminal |
| 19 | VOLCKO | O | Electric volume serial clock output terminal |
| 20 | VOLCE | O | Electric volume serial chip enable output terminal |
| 21 | TAPEMUT | O | AUDIO signal select control output terminal |
| 22 | LMLOD | O | LOADING MOTOR control output terminal (LOADING direction) |
| 23 | LMEJ | O | LOADING MOTOR control output terminal (EJECT direction) |
| 24 | AMSON | O | AMS control output terminal |
| 25 | N ROUT | O | FORWARD/REVERSE detection output terminal |
| 26 | AMSIN | I | Music with/without detection input terminal at AMS. |
| 27 | PLL SO | O | PLL DATA output terminal |
| 28 | PLLCKO | O | PLL CLK output terminal |
| 29 | PLLCE | O | PLL CE output terminal |
| 30 | RDSSI | I | RDS-DATA input terminal |
| 31 | AD ON | O | AD port power control output terminal |
| 32 | DOLON | I/O | DOLBY control input/output terminal |
| 33 | MTLON | I/O | METAL control input/output terminal |
| 34 | CMON | O | TAPE capstan motor control signal output terminal |
| 35 | TAPON | O | TAPE power control output terminal |
| 36 | ACCON | I | ACC power detection input terminal |
| 37 | PLLSI | I | PLL DATA input terminal |
| 38 | BEEP | O | Control output terminal for BEEP sound. |
| 39 | LCDCKO | O | LCD serial clock output terminal |
| 40 | LCD SO | O | LCD serial data output terminal |
| 41 | LCDINH | O | LCD blank display control output terminal |
| 42 | LCDCE | O | LCD chip enable output terminal |
| 43 | UNICKO | — | Not used. |
| 44 | UNICI | — | Not used. |
| 45 | UNISI | — | Not used. |
| 46 | UNISO | — | Not used. |


| Pin No. | Pin Name | I/O | Pin Description |
|---------|------------------|-----|---|
| 47 | VDD | — | Power terminal |
| 48 | AVDD | — | Power terminal of AD input port. Connect to pin ④⑦. |
| 49 | AVREF+ | — | Reference voltage input of AD input port. (+ side) |
| 50, 51 | KEYIN1, KEYIN0 | I | KEY input terminal |
| 52 | KEYSEL1 | I | KEY function select input terminal. “L” for XR-6600RDS, “H” for XR-6700RDS. |
| 53 | KEYSEL0 | I | Connect to GND. |
| 54, 55 | DSTSEL1, DSTSEL0 | I | Connect to GND. |
| 56 | RCIN0 | I | Rotary Commander Shift input terminal |
| 57 | VSM | I | Signal meter AD input port terminal of FM/AM common. |
| 58 | AVREF— | — | Reference voltage input of AD input port. (— side) |
| 59 | AVSS | — | GND. Connect to pin ⑤⑧. |
| 60 | GND | — | GND |
| 61 | BUSON | — | Not used. |
| 62 | SYSRST | — | Not used. |
| 63 | SEEKOUT | O | SEEK OUT output terminal |
| 64 | TUNON | O | TUNER power control output terminal |
| 65 | FM ON | O | FM power control output terminal |
| 66 | MUT | O | System MUTE output terminal |
| 67 | AF SEK | O | Output terminal for AF-SEEK. |
| 68 | COLOR | O | Illumination color select control output terminal |
| 69 | NOSESW | I | Input pin for detecting mounting of front panel. |
| 70 | ST | I | ST indicate to turn ON for “L”. |
| | | O | At forced monaural, output for “L”. |
| 71 | SD IN | I | STOP decide on SEEK, AUTO-MEMORY and SCAN. |
| 72 | REL S | I | Reverse direction rotation detection input terminal of reel table. |
| 73 | PW SEL | I | Power select switching input terminal |
| 74 | REL T | I | Forward direction rotation detection input terminal of reel table. |
| 75—78 | POS4—POS1 | I | Position signal detection input terminal |
| 79 | TEST | I | Test mode input terminal |
| 80 | ILLIN | I | Connect to GND. |

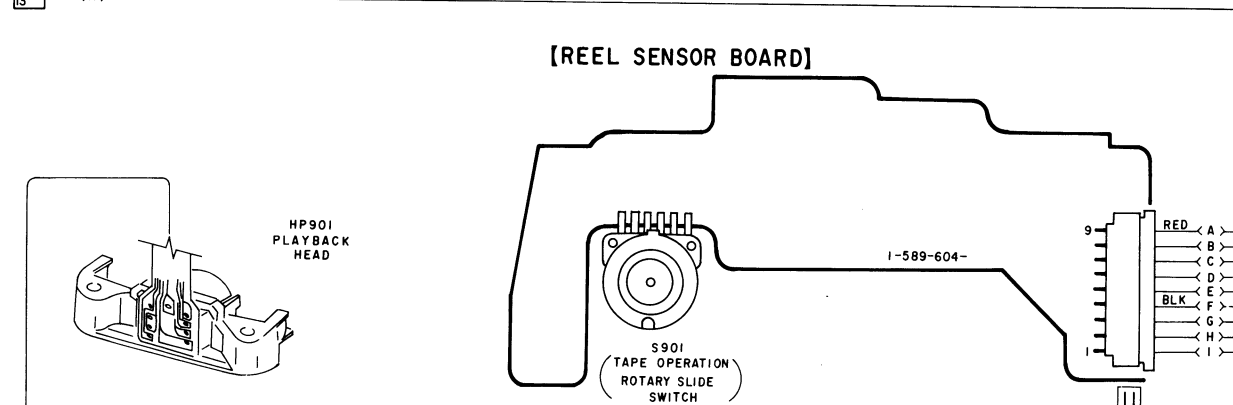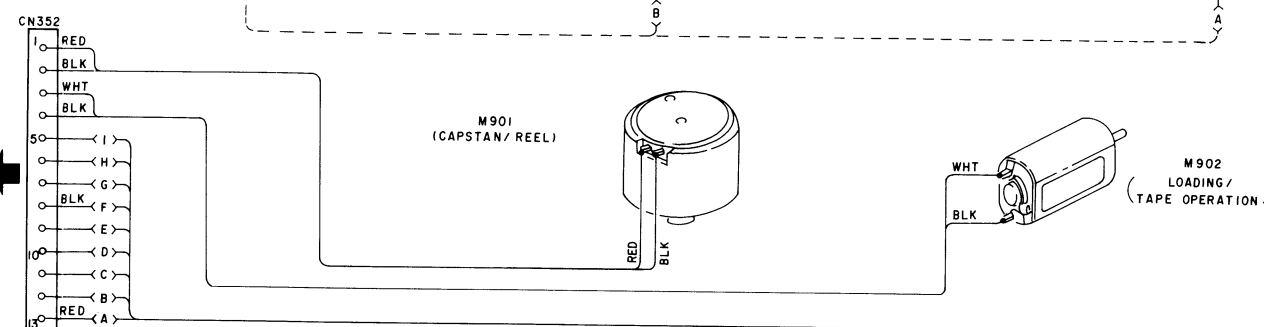


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
|---|---|---|---|---|---|---|---|---|----|----|
|---|---|---|---|---|---|---|---|---|----|----|



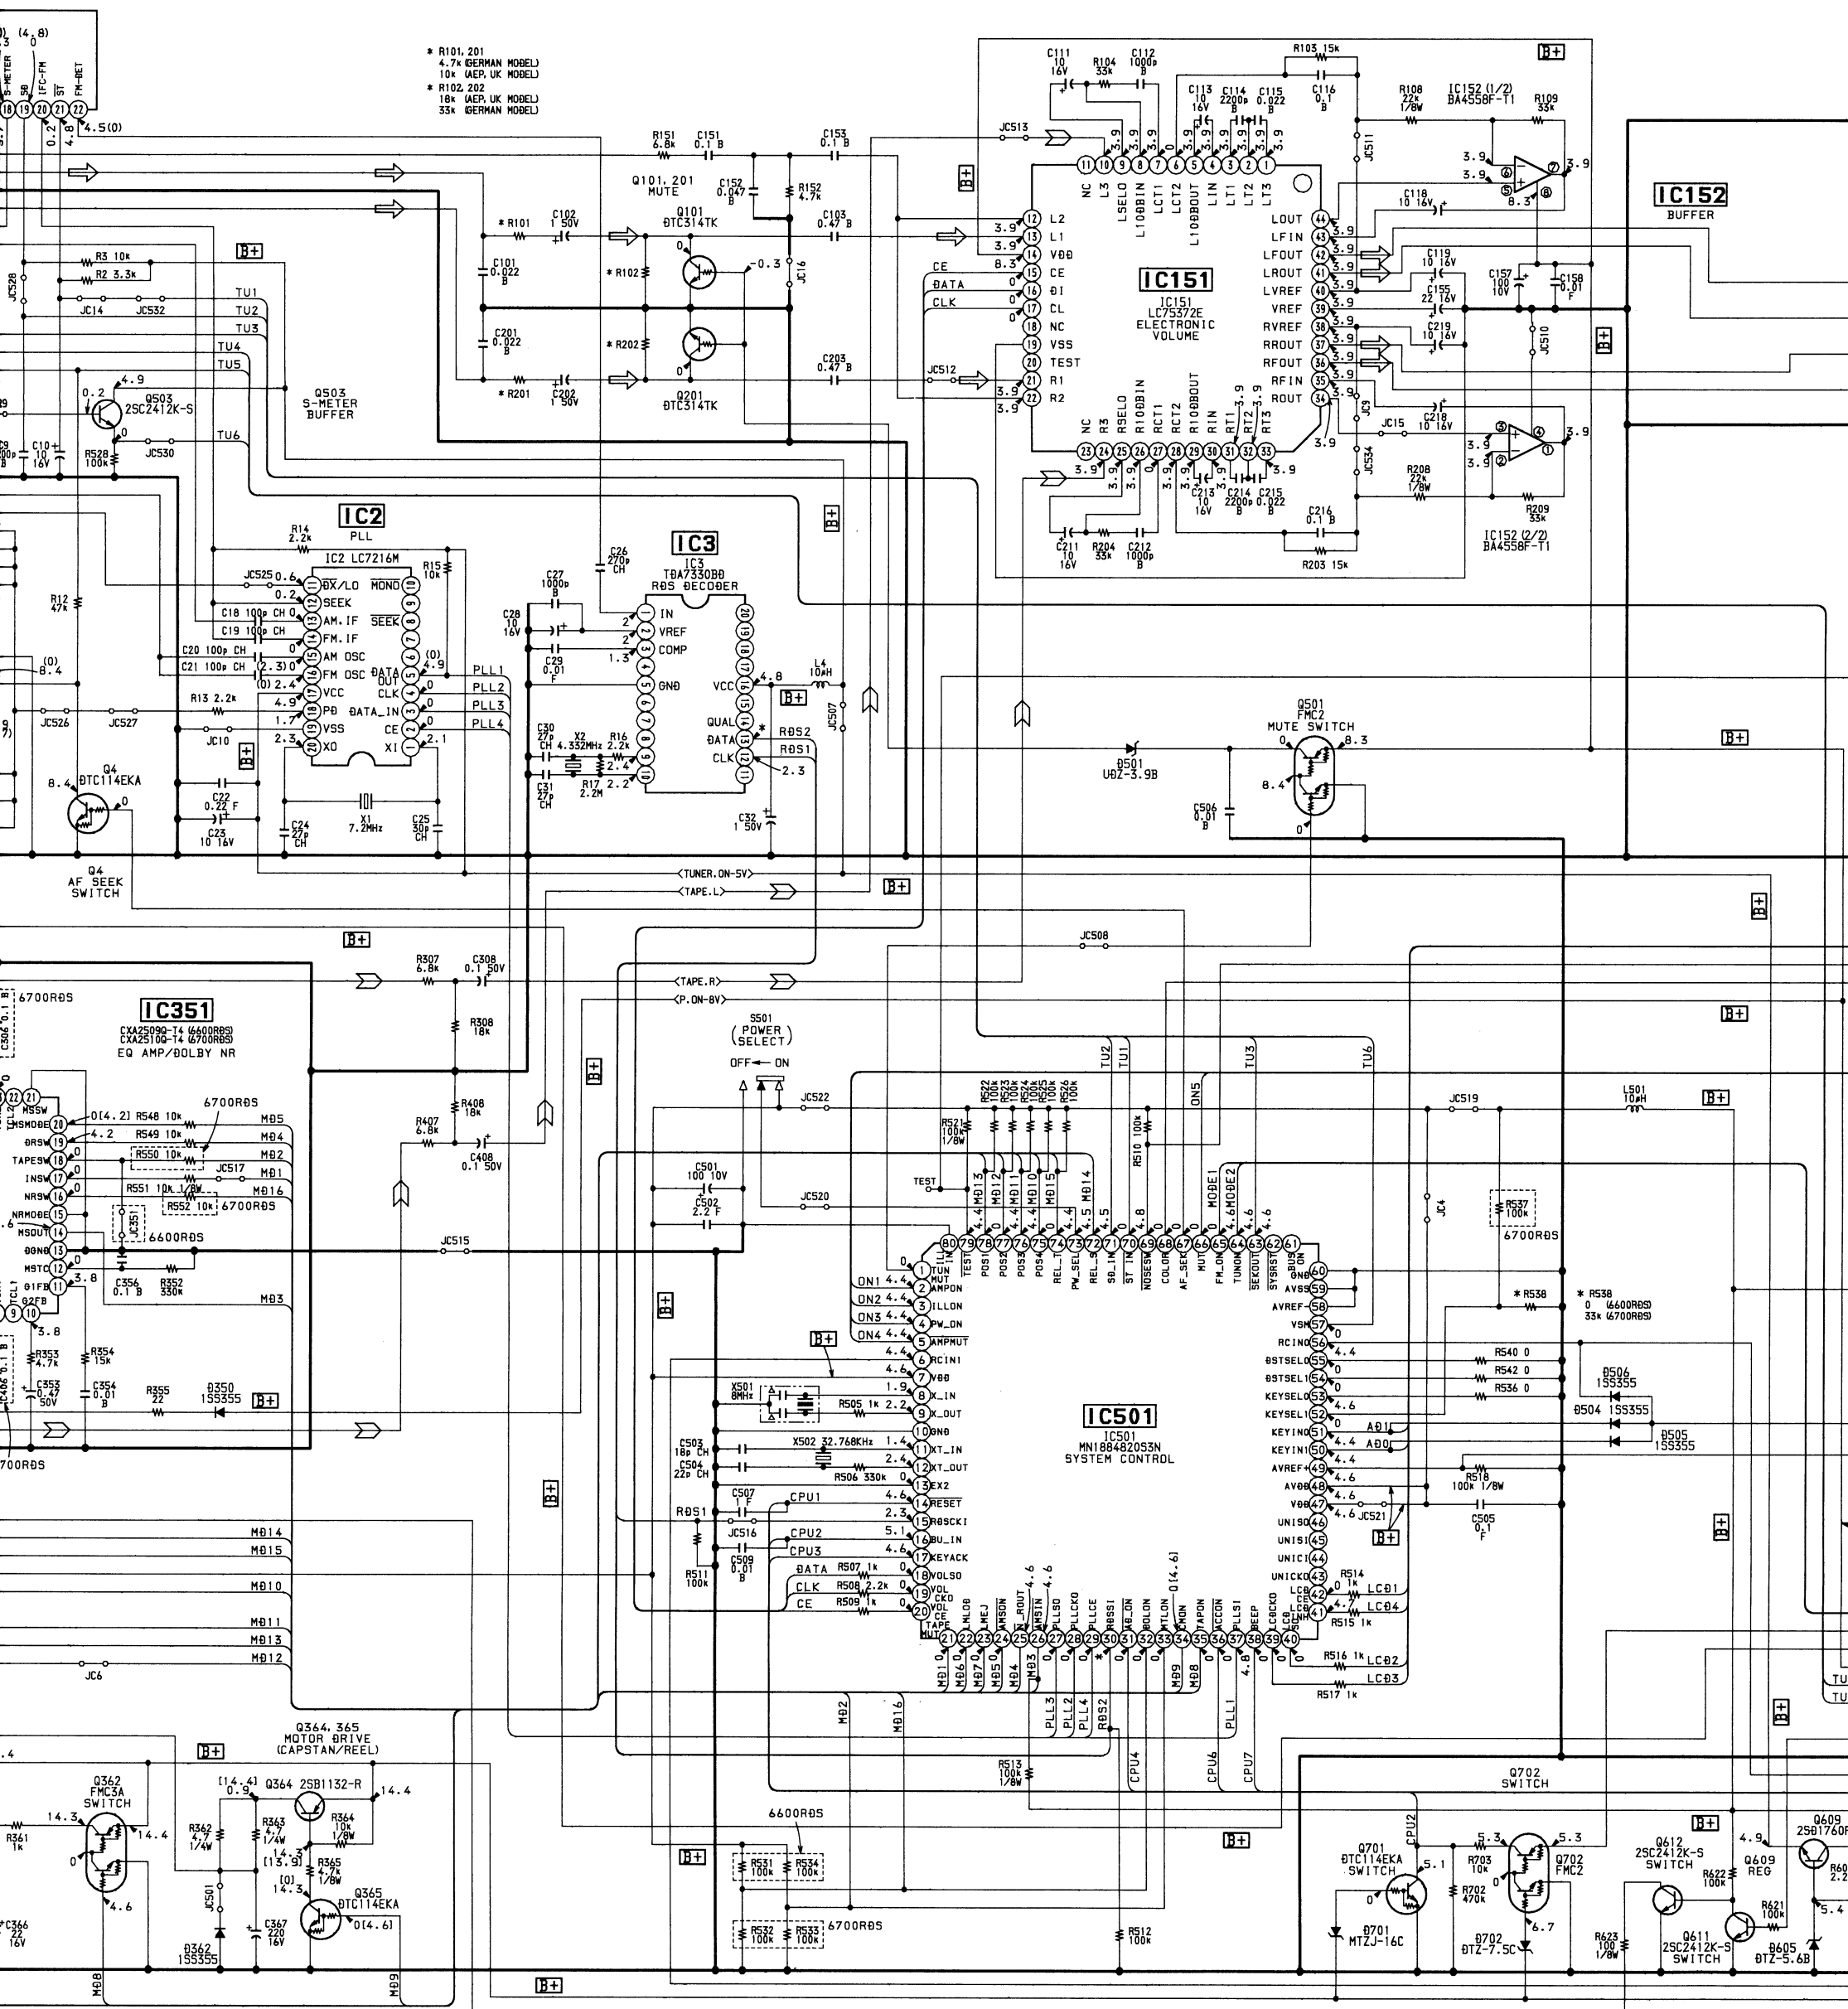





6-4. SCHEMATIC DIAGRAM—AMPLIFIER SECTION—

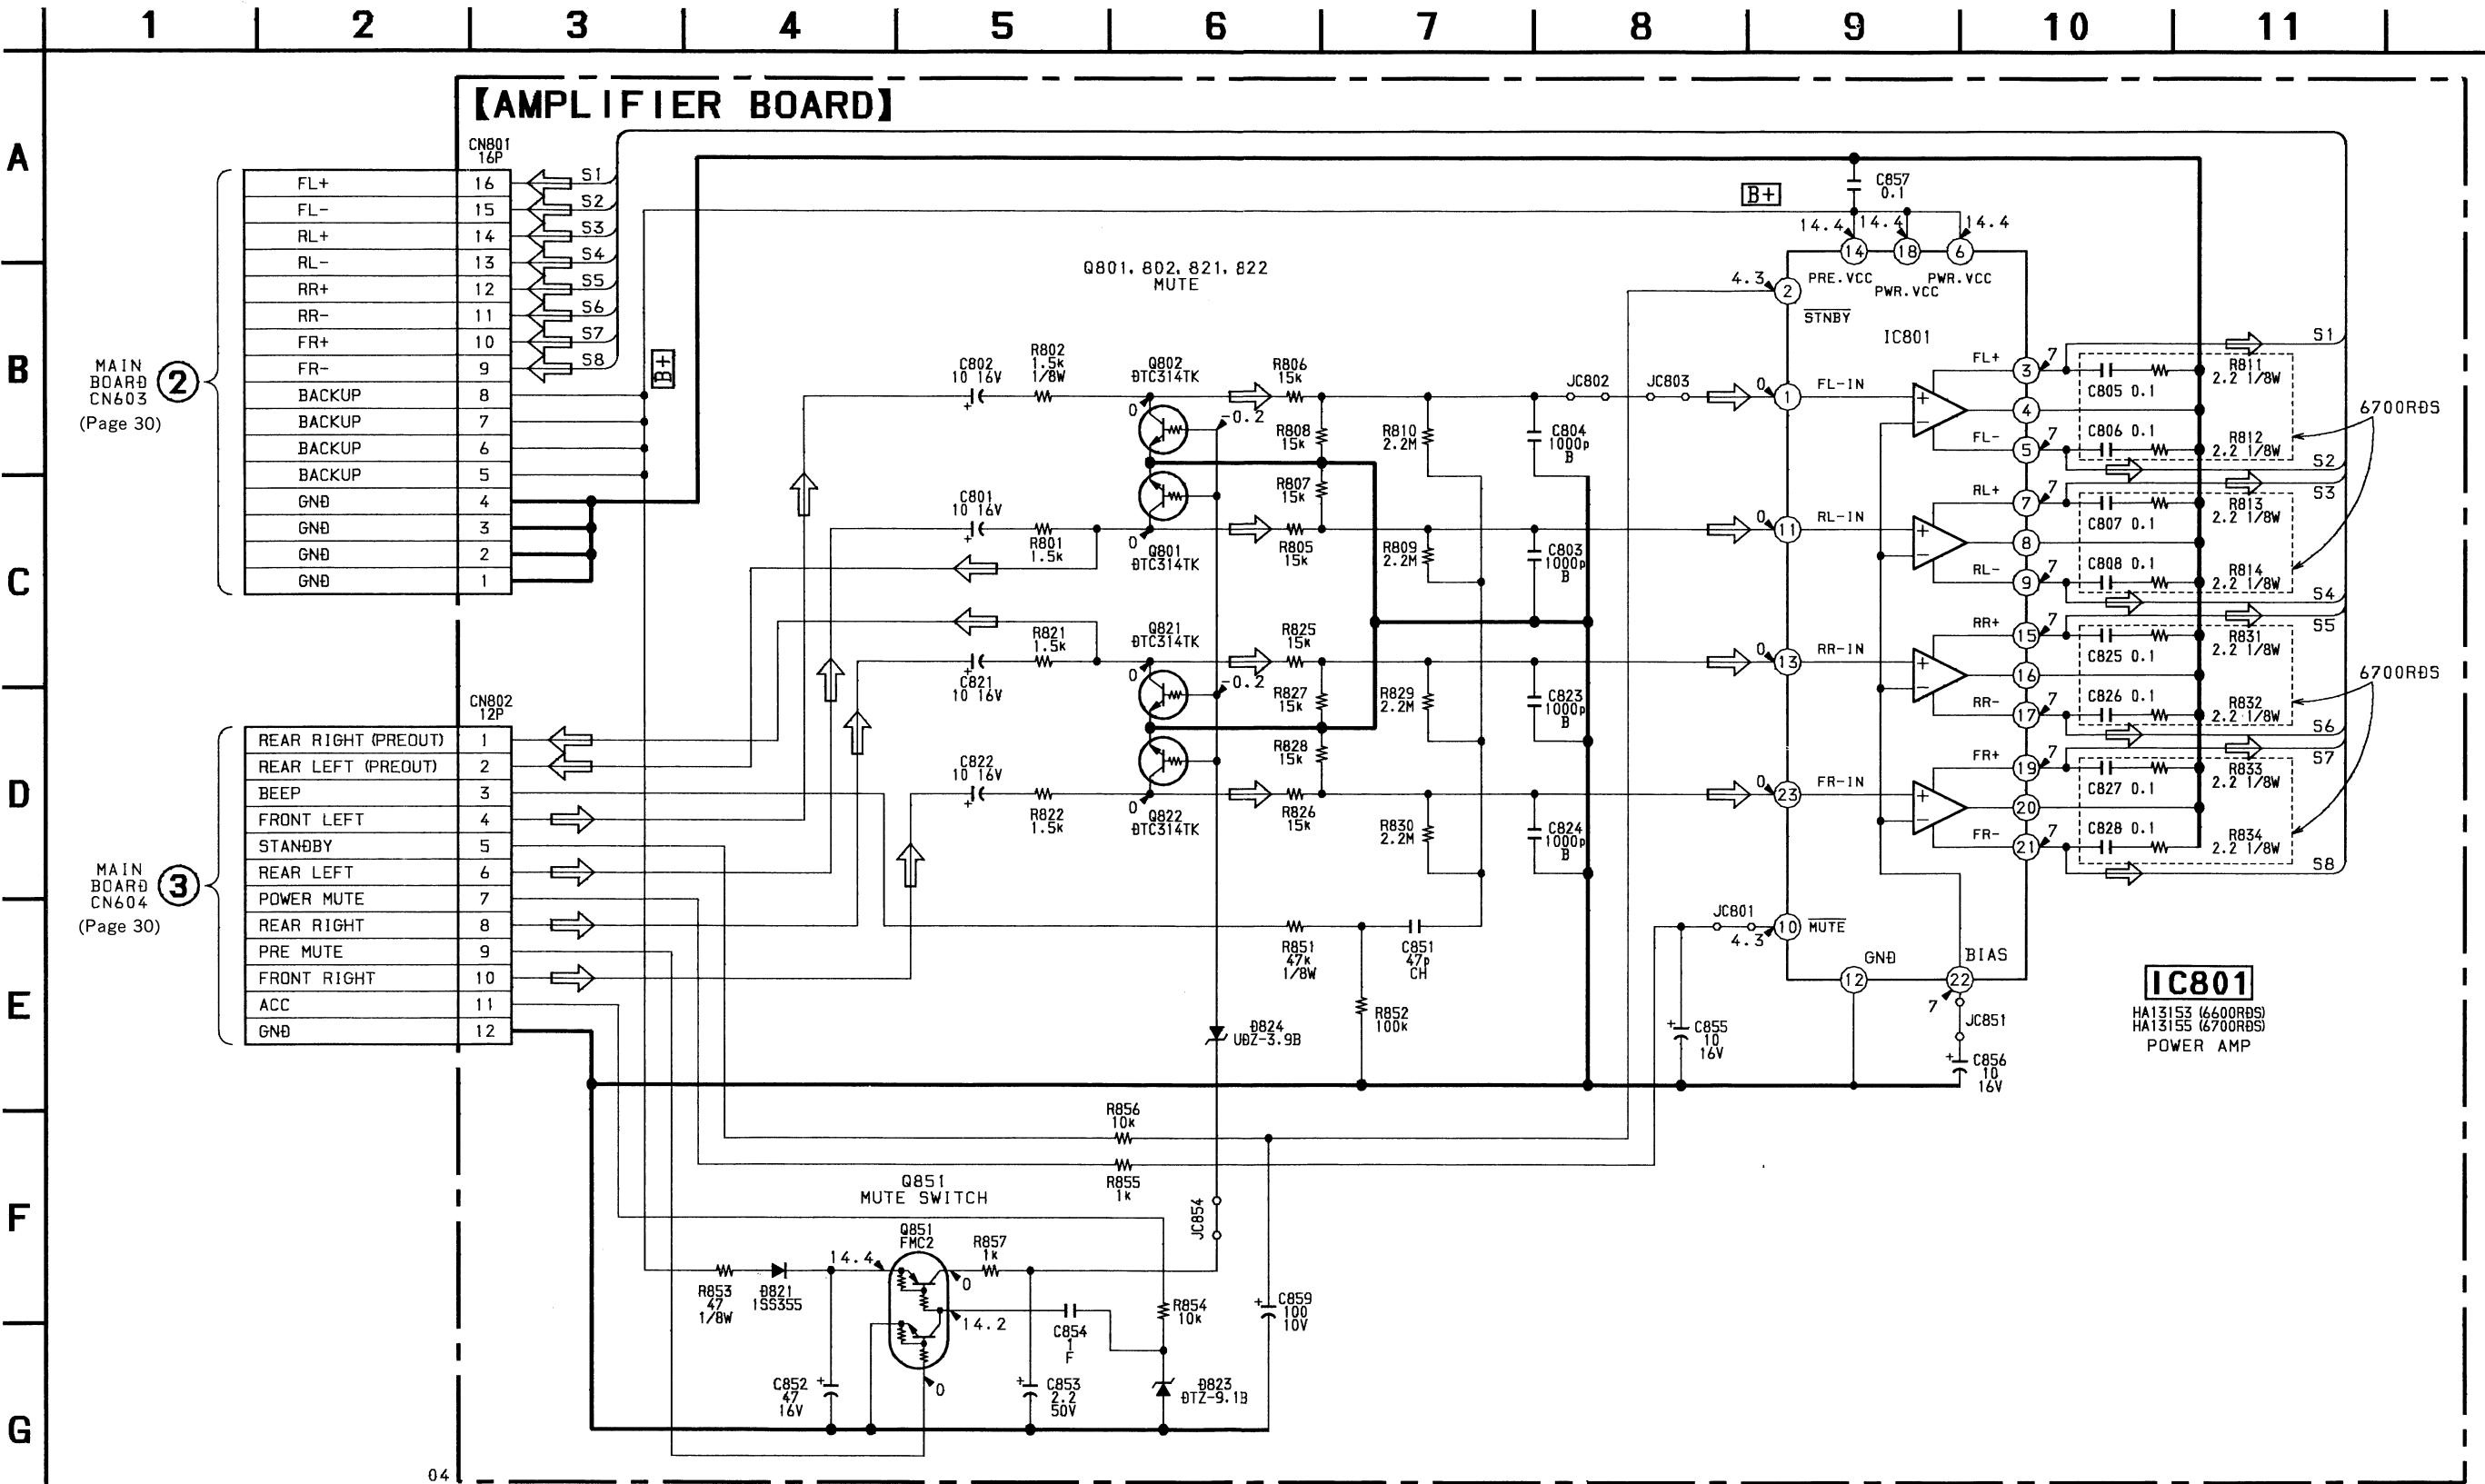

6-5. SCHEMATIC DIAGRAM—PANEL SECTION—

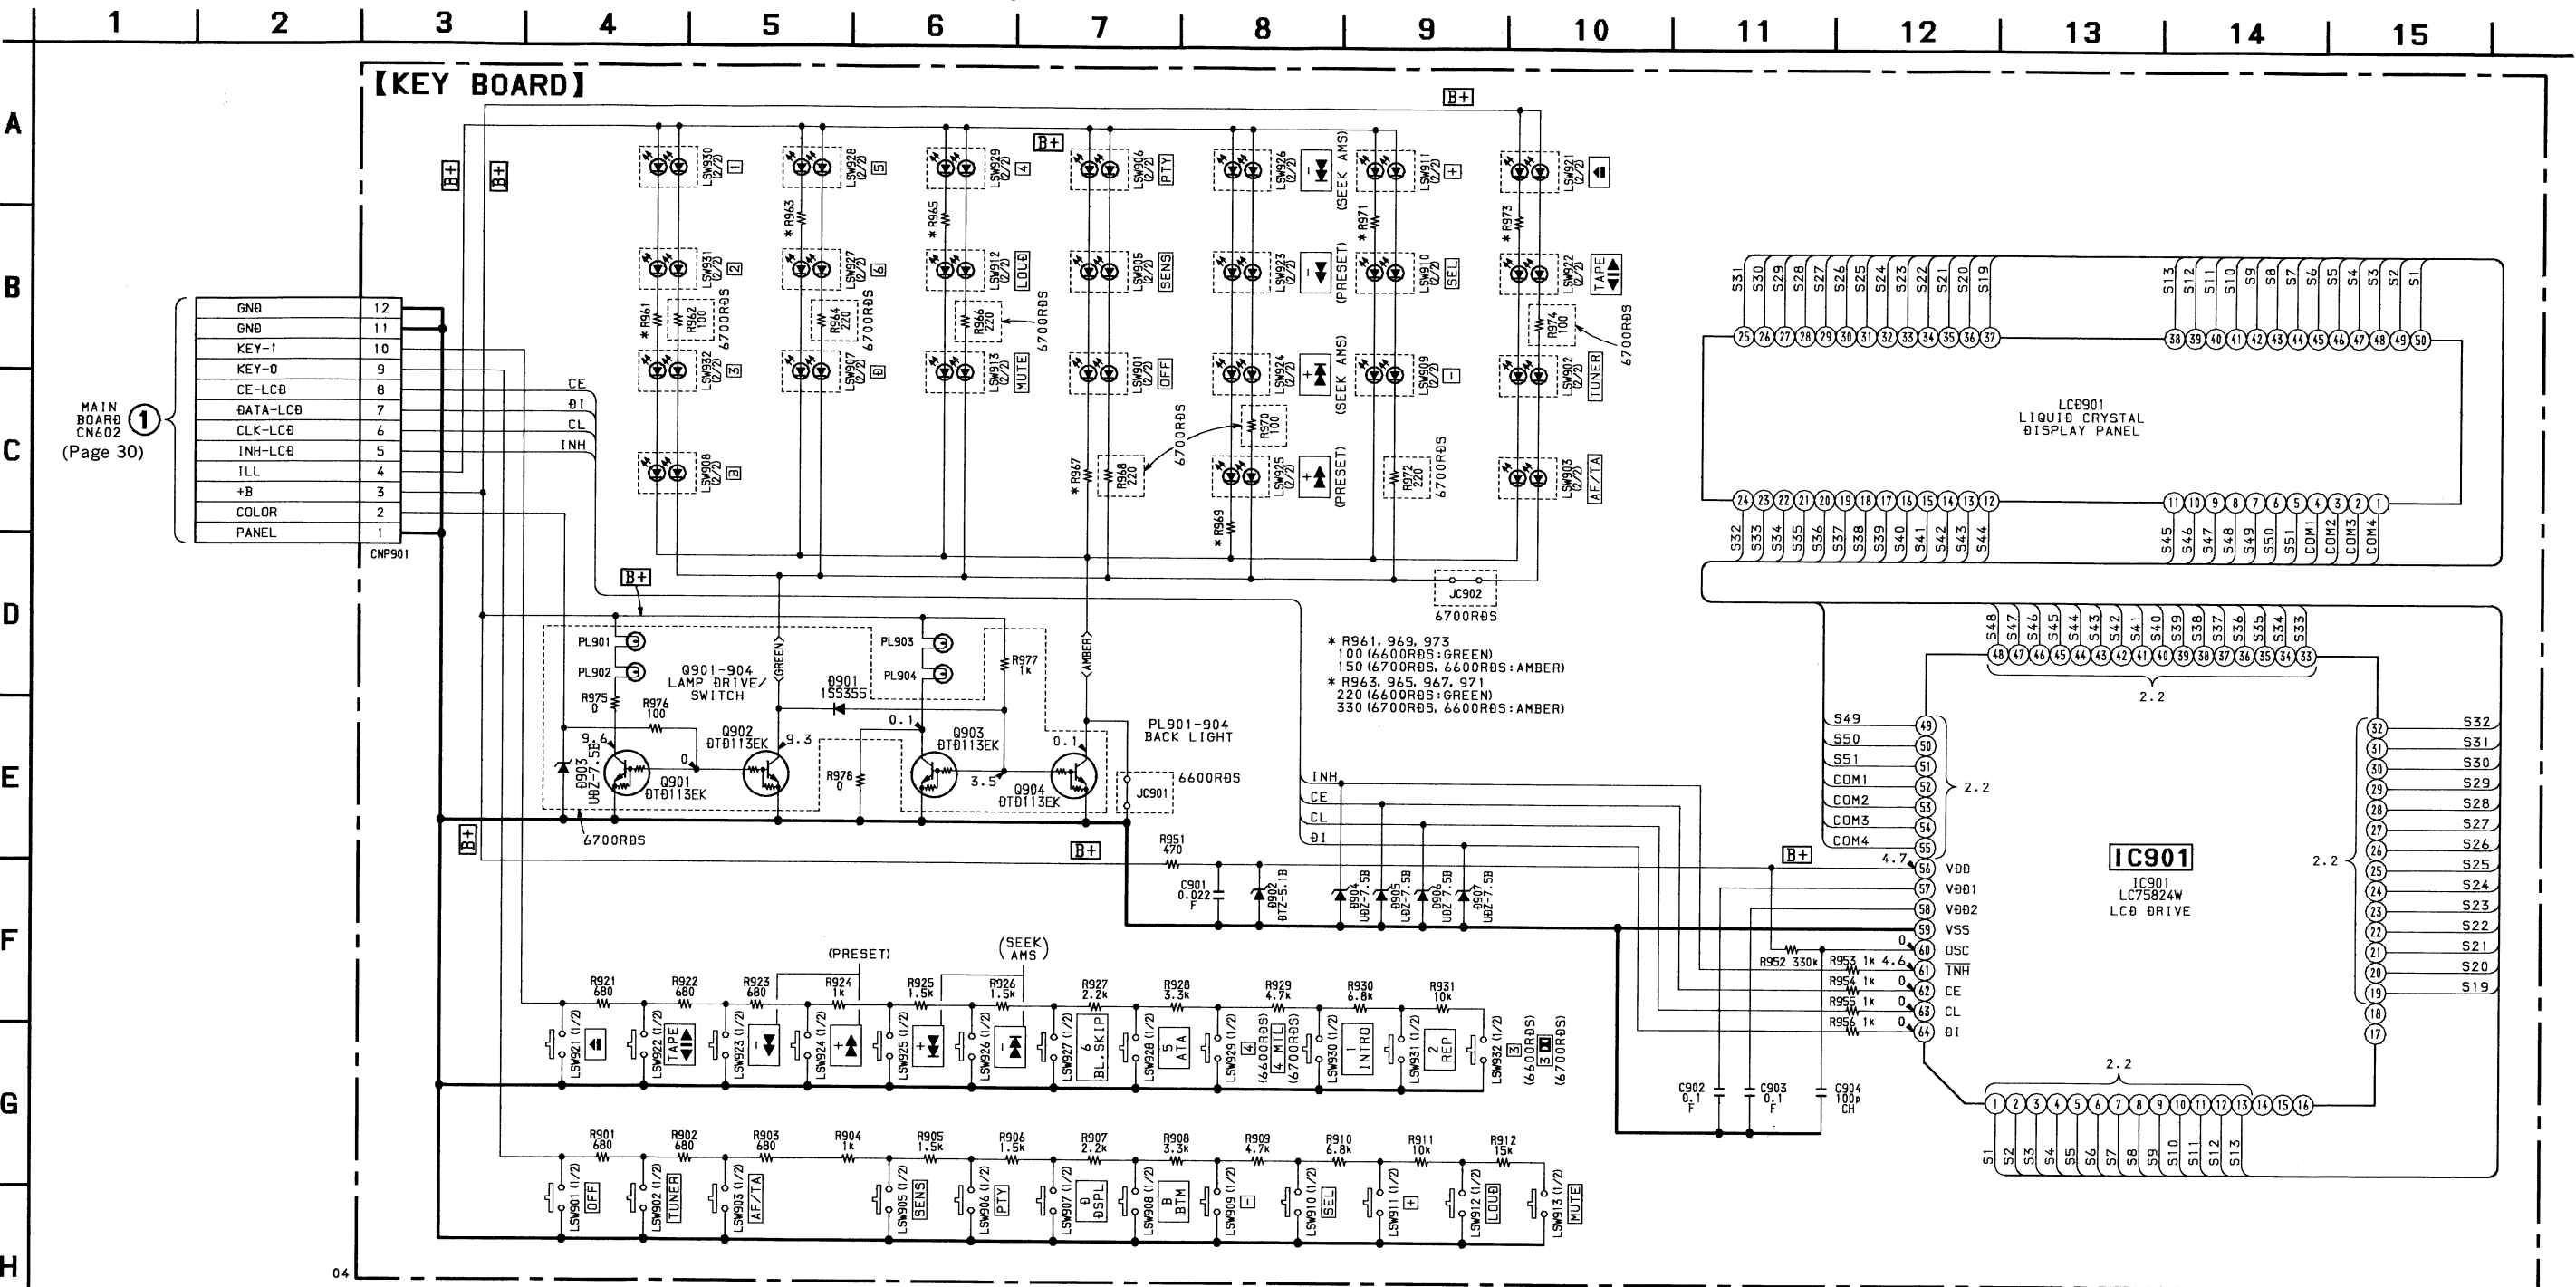

6-6. PRINTED WIRING BOARD—PANEL SECTION—

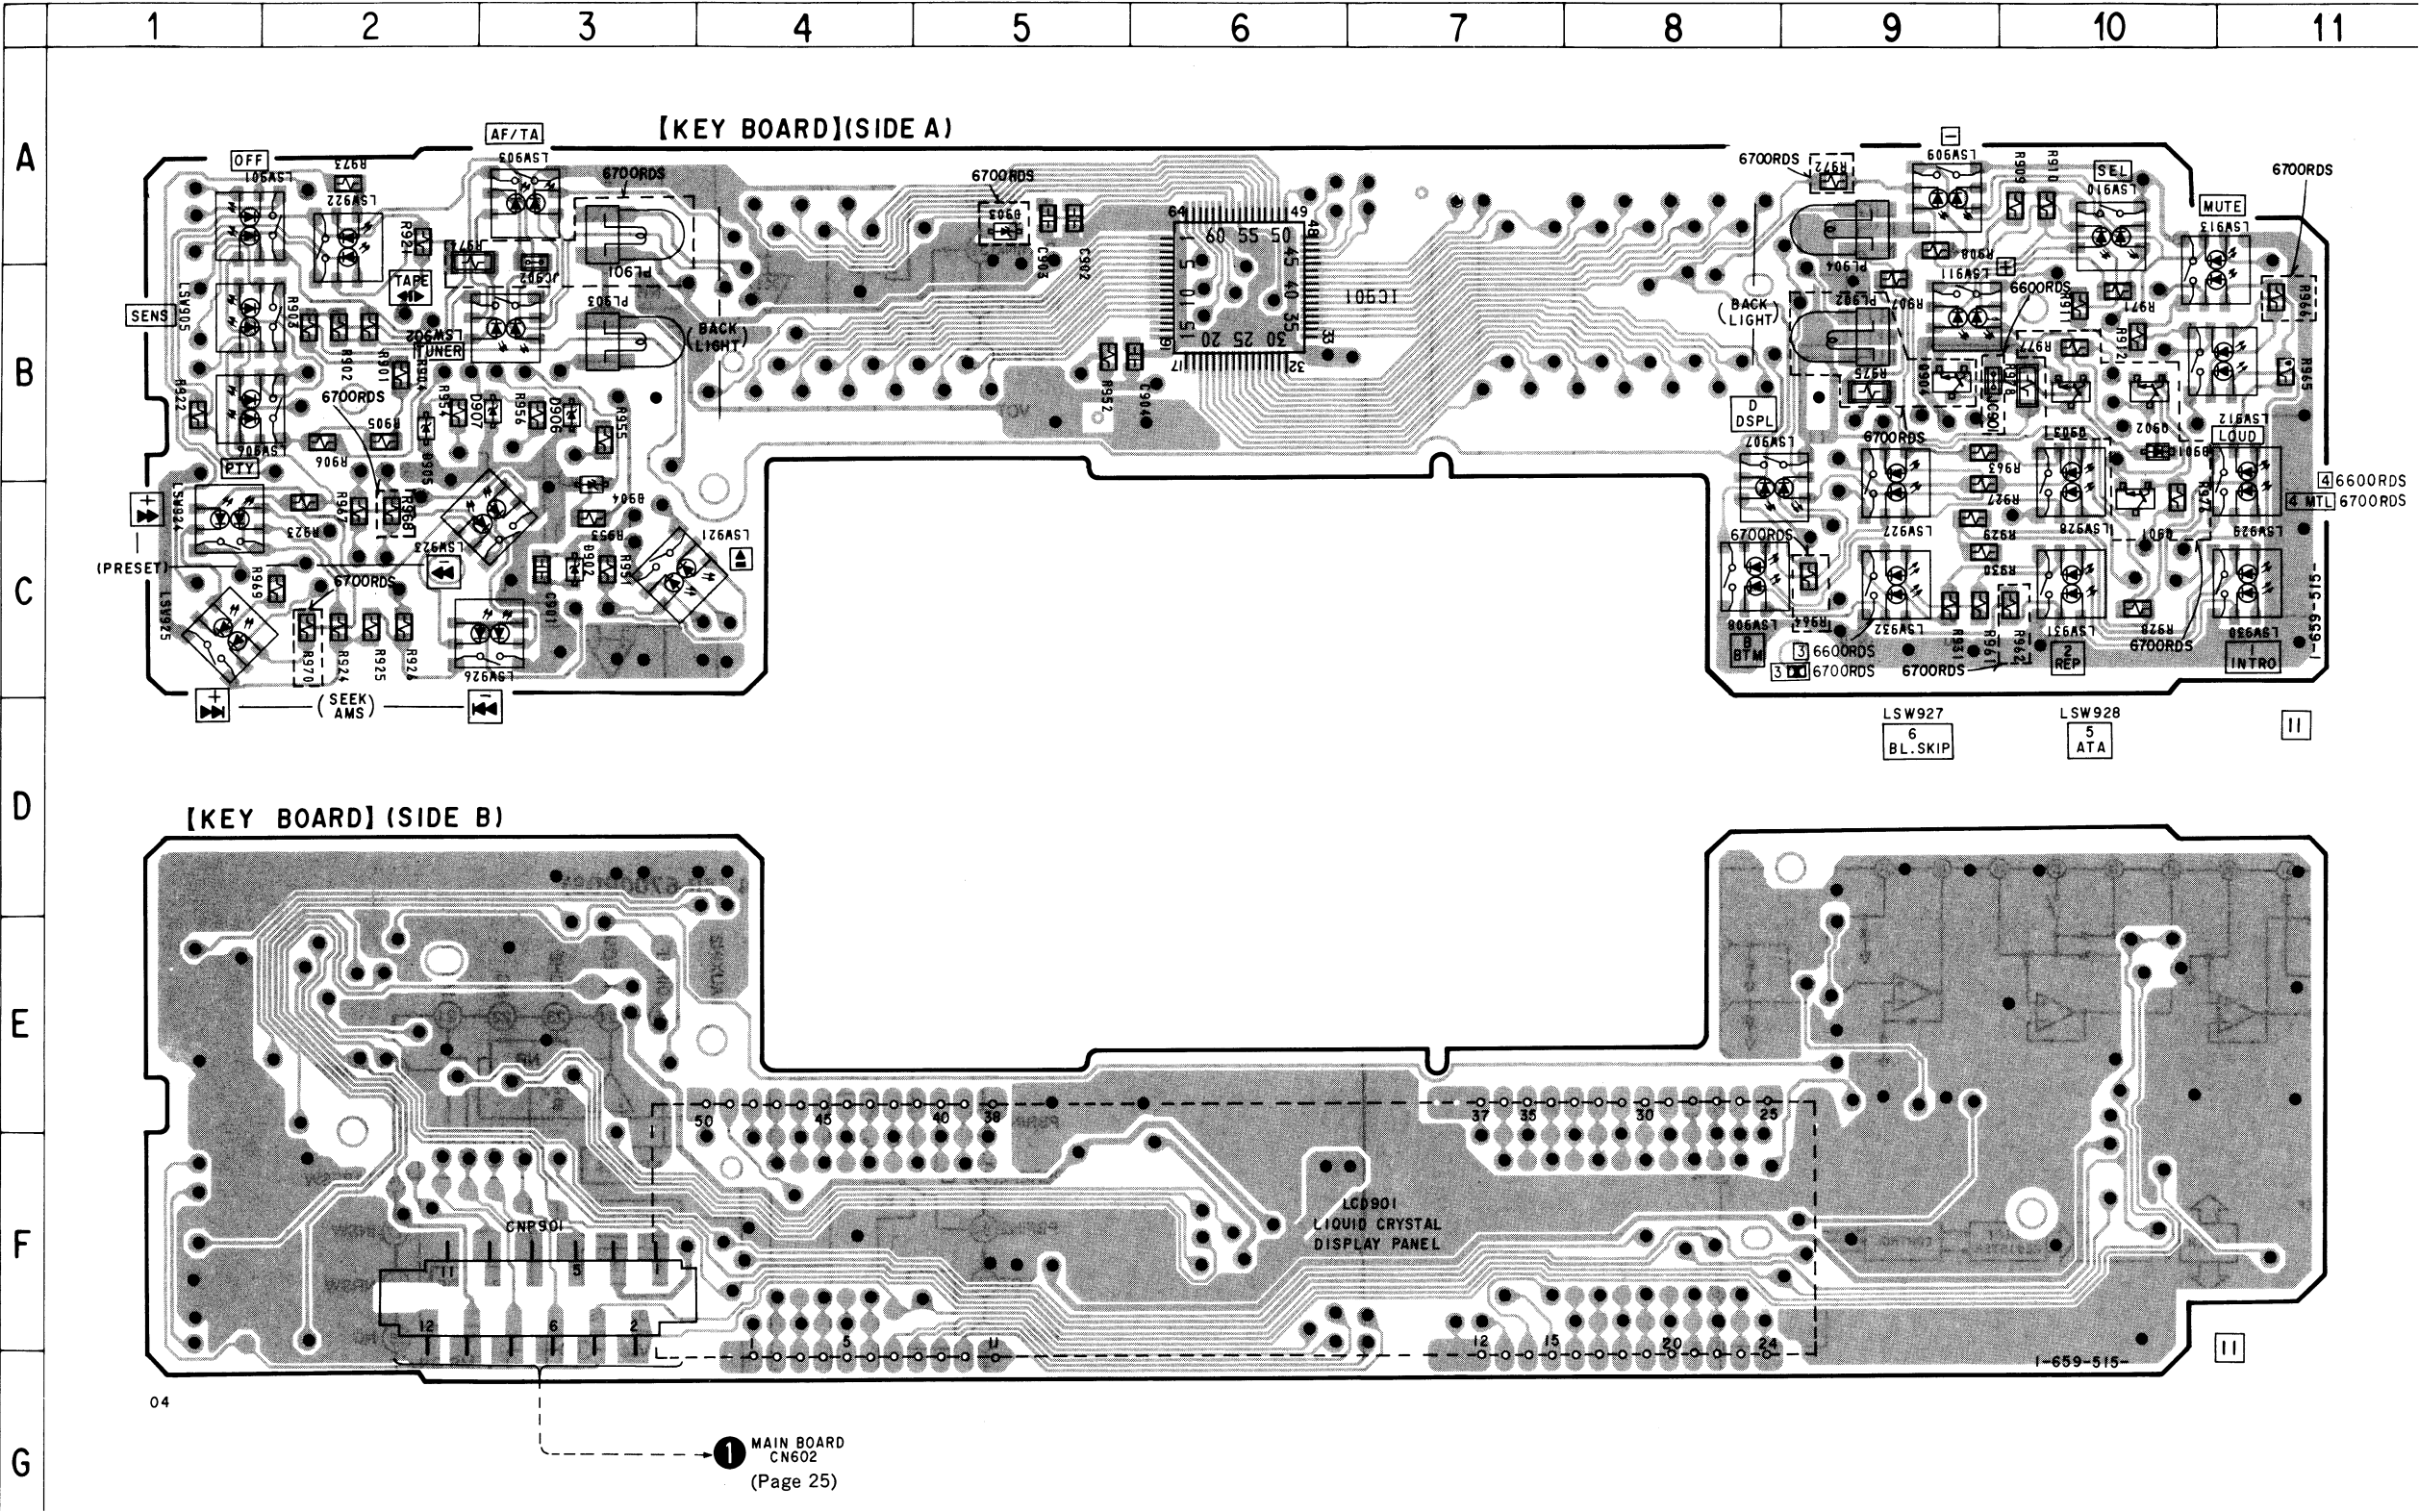

● Semiconductor Location


| Ref. No. | Location |
|----------|----------|
| (D901) | B-10 |
| D902 | C-3 |
| (D903) | A-5 |
| D904 | B-3 |
| D905 | B-2 |
| D906 | B-3 |
| D907 | B-3 |
| IC901 | B-6 |
| (Q901) | C-10 |
| (Q902) | B-10 |
| (Q903) | B-10 |
| (Q904) | B-9 |

(): XR-6700RDS only


Note:

- : parts extracted from the component side.
- : Through hole.
- : Pattern on the side which is seen.
(The other layer's patterns are not indicated.)


IC1 TC4W66F

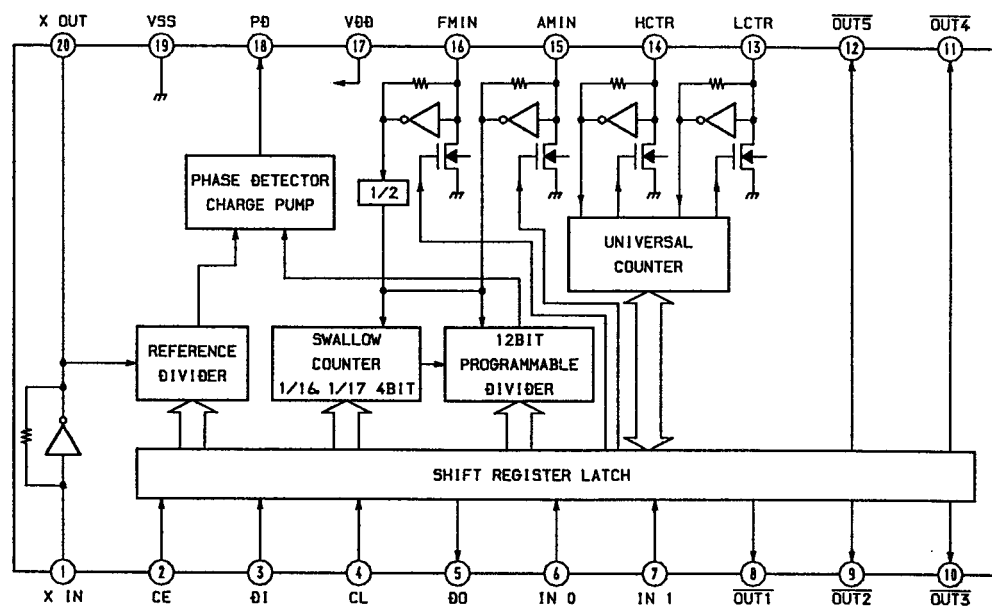


IC351 CXA2509Q-T4 (XR-6600RDS)

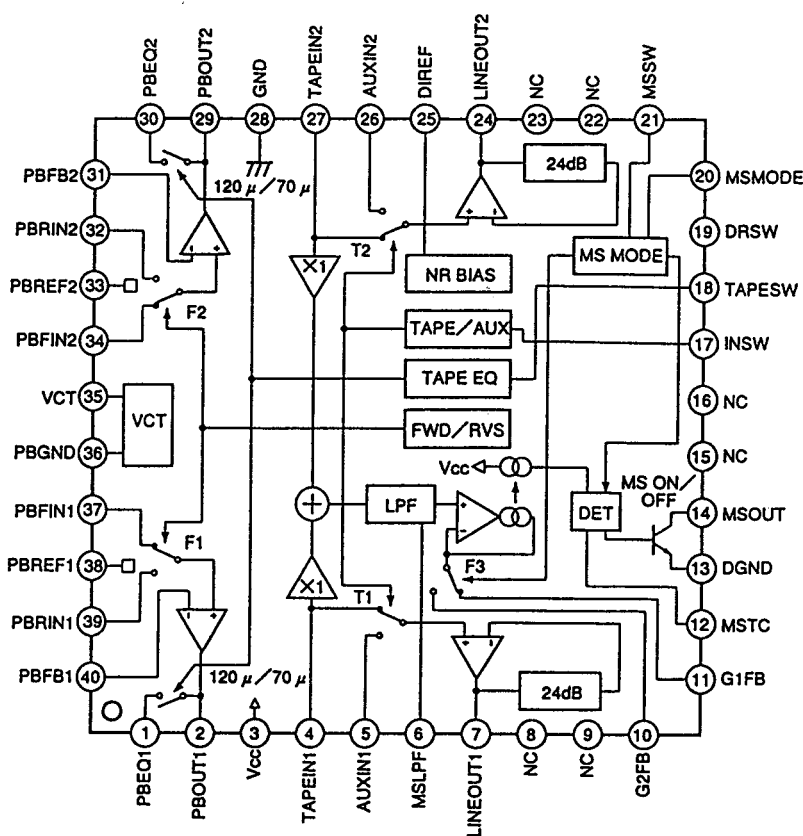


IC351 CXA2510Q-T4 (XR-6700RDS)

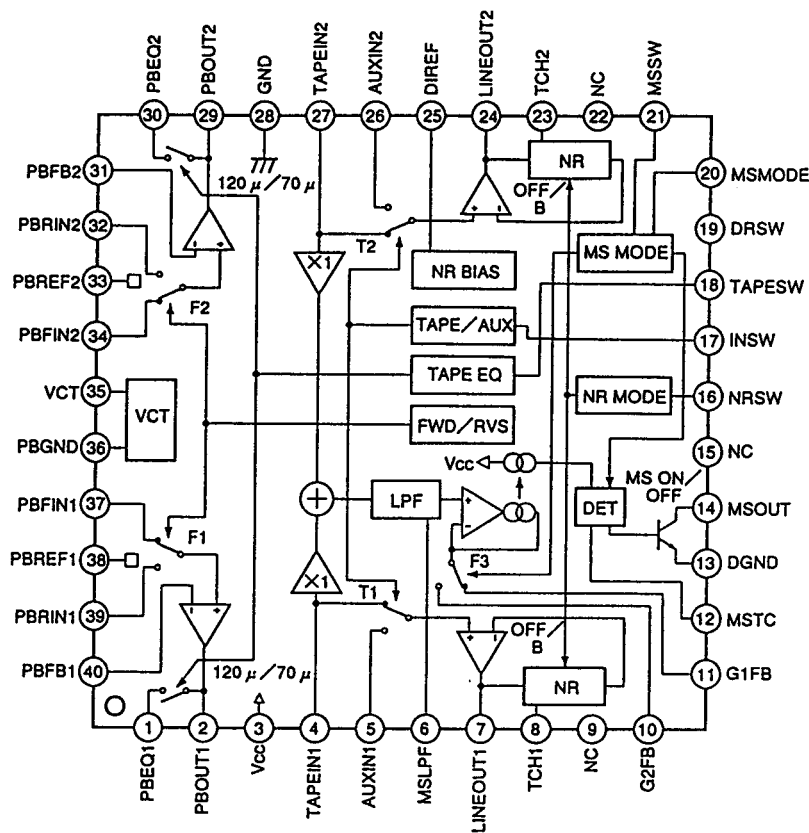

IC360 LB1638M

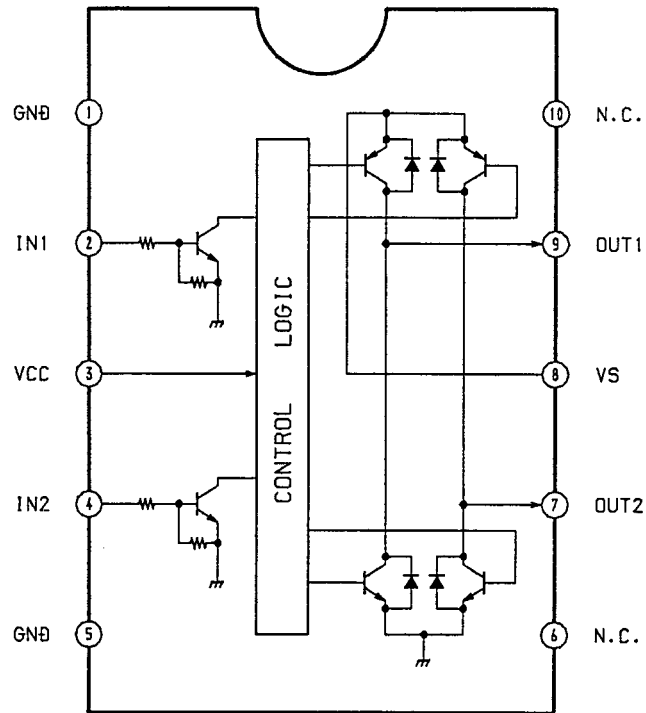

IC601 BA3918-V3

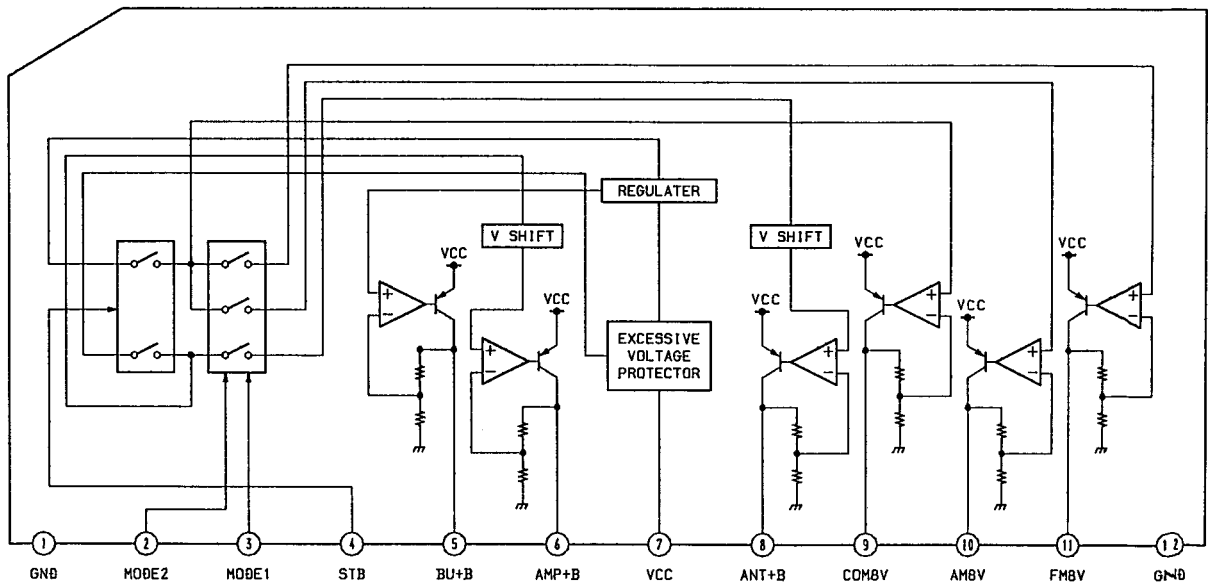


SECTION 7

EXPLODED VIEWS

NOTE:


- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Color Indication of Appearance Parts
Example :
KNOB, BALANCE (WHITE)... (RED)
 ↑ ↑
 Parts Color Cabinet's Color
- Hardware (# mark) list and accessories and packing materials are given in the last of this parts list.
- Abbreviation
G : German model

7-1. CHASSIS SECTION

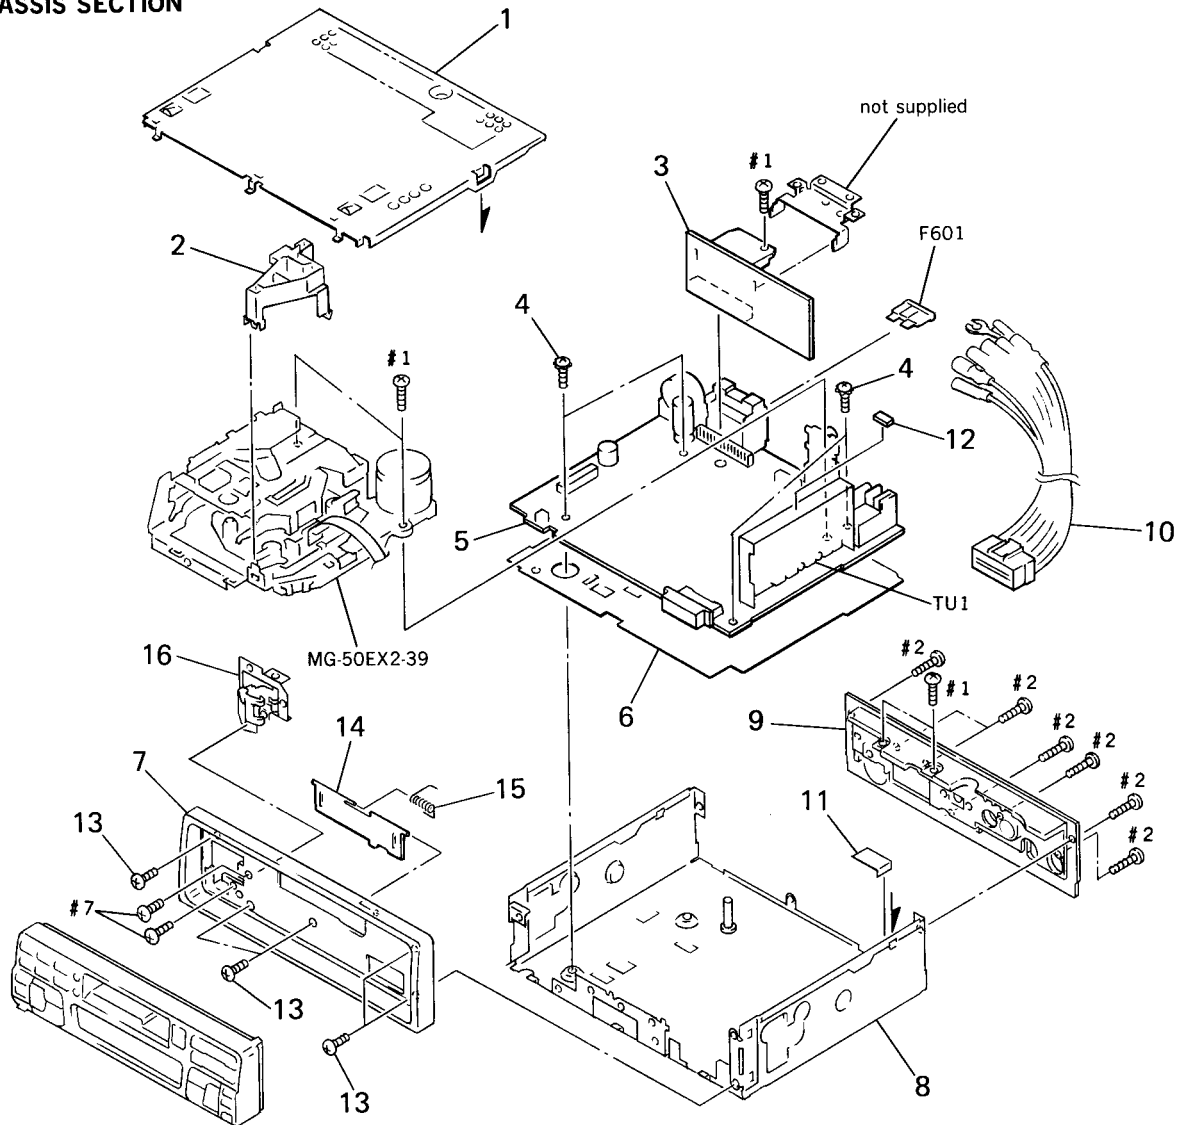

| Ref. No. | Part No. | Description | Remark | Ref. No. | Part No. | Description | Remark |
|----------|--------------|---------------------------------------|--------|----------|--------------|-------------------------------------|--------|
| * 1 | X-3369-736-1 | COVER ASSY | | * 9 | 3-931-219-11 | HEAT SINK (6700RDS) | |
| 2 | 3-927-799-01 | GUIDE (CASSETTE) | | * 9 | 3-931-219-31 | HEAT SINK (6600RDS) | |
| * 3 | A-3309-056-A | AMPLIFIER BOARD, COMPLETE (6600RDS) | | 10 | 1-776-527-31 | CORD (WITH CONNECTOR) (ISO) | |
| * 3 | A-3309-090-A | AMPLIFIER BOARD, COMPLETE (6700RDS) | | * 11 | 3-925-065-01 | SHEET (CU) | |
| 4 | 3-915-923-01 | SCREW, GROUND POINT | | 12 | 9-911-840-XX | CUSHION (U) | |
| * 5 | A-3309-081-A | MAIN BOARD, COMPLETE (6600RDS:G) | | 13 | 3-907-995-01 | SCREW (2.6X8) (BZN), +PTT | |
| * 5 | A-3309-082-A | MAIN BOARD, COMPLETE (6600RDS:AEP,UK) | | 14 | 3-922-165-53 | DOOR, CASSETTE (6700RDS) | |
| * 5 | A-3309-088-A | MAIN BOARD, COMPLETE (6700RDS:AEP,UK) | | 14 | 3-922-165-83 | DOOR, CASSETTE (6600RDS) | |
| * 5 | A-3309-089-A | MAIN BOARD, COMPLETE (6700RDS:G) | | 15 | 3-913-076-01 | SPRING (C DOOR), TORSION | |
| * 6 | 3-931-201-01 | SHEET, INSULATING | | 16 | X-3367-636-1 | LOCK ASSY | |
| 7 | 3-921-650-05 | PANEL, SUB | | F601 | 1-533-331-11 | FUSE (BLADE TYPE) (AUTO FUSE) (15A) | |
| * 8 | X-3371-519-1 | CHASSIS ASSY | | TU1 | A-3282-012-A | TUNER UNIT (TUX-006) | |


**7-3. MECHANISM DECK SECTION
(MG-50EX2-39)**

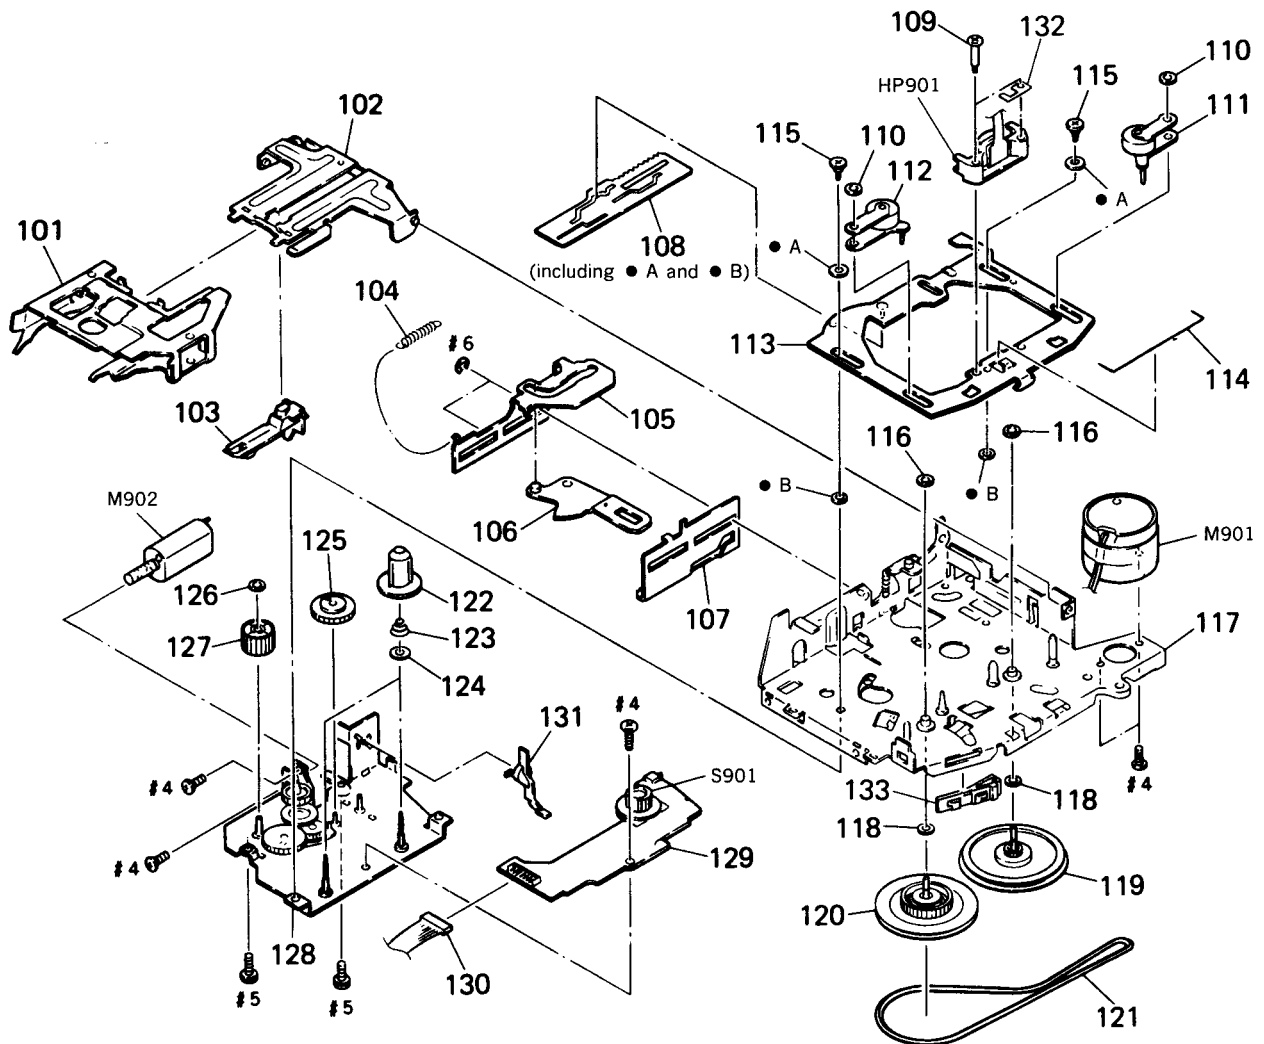

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|-----------------------------------|--------|
| 101 | 3-928-222-01 | HOUSING (2), CASSETTE | |
| 102 | 3-912-882-01 | HANGER (2), HOUSING | |
| 103 | 3-912-884-01 | CATCHER | |
| 104 | 3-912-885-01 | SPRING (LOADING LEVER), TENSION | |
| * 105 | 3-912-892-01 | LEVER (B), LOADING | |
| * 106 | 3-912-883-01 | ARM, SUCTION | |
| 107 | 3-922-941-01 | LEVER (LOADING A) | |
| * 108 | X-3370-516-1 | LEVER (SV) ASSY, MODE | |
| 109 | 3-927-100-11 | SCREW (+PS 2X10), SPECIAL | |
| 110 | 3-579-788-01 | WASHER, STOPPER | |
| 111 | X-3368-266-1 | PINCH LEVER (F) ASSY | |
| 112 | X-3368-267-1 | PINCH LEVER (R) ASSY | |
| 113 | X-3370-824-1 | BASE ASSY (HD2), HEAD | |
| 114 | 3-912-879-01 | SPRING, PINCH PRESS | |
| 115 | 3-931-184-01 | SCREW (HB2), STEP | |
| 116 | 3-364-151-01 | WASHER | |
| 117 | X-3368-841-1 | CHASSIS (SV) ASSY (A), MECHANICAL | |
| 118 | 3-701-437-21 | WASHER | |
| 119 | 3-930-932-01 | FLYWHEEL (F) (SEF) | |

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|--|--------|
| 120 | X-3371-303-1 | CLUTCH (SEF) ASSY, FR | |
| 121 | 3-912-896-01 | BELT | |
| 122 | X-3368-843-1 | GEAR ASSY, REEL | |
| 123 | 3-917-222-01 | SPRING (B-T), COIL | |
| 124 | 3-917-324-01 | WASHER (B-T) | |
| 125 | 3-912-888-03 | GEAR (LOADING E) | |
| 126 | 3-321-813-01 | WASHER, COTTER POLYETHYLENE | |
| 127 | 3-912-889-01 | GEAR (LOADING F) | |
| 128 | X-3368-842-1 | BRACKET (SV) ASSY, REEL | |
| 129 | 1-589-604-11 | REEL SENSOR BOARD | |
| 130 | 1-765-460-12 | CORD (WITH CONNECTOR) | |
| 131 | 3-916-358-01 | LEVER (TAPE IN 2) | |
| * 132 | 3-917-258-01 | PLATE, GROUND | |
| 133 | 3-919-553-01 | GUIDE (BELT) | |
| HP901 | 1-500-196-21 | HEAD, MAGNETIC (PLAYBACK) | |
| M901 | X-3368-684-1 | MOTOR ASSY, MAIN (CAPSTAN/REEL) | |
| M902 | X-3368-685-1 | MOTOR ASSY, SUB (LOADING/TAPE OPERATION) | |
| S901 | 1-692-885-11 | SWITCH, ROTARY SLIDE (TAPE OPERATION) | |

7-2. FRONT PANEL SECTION

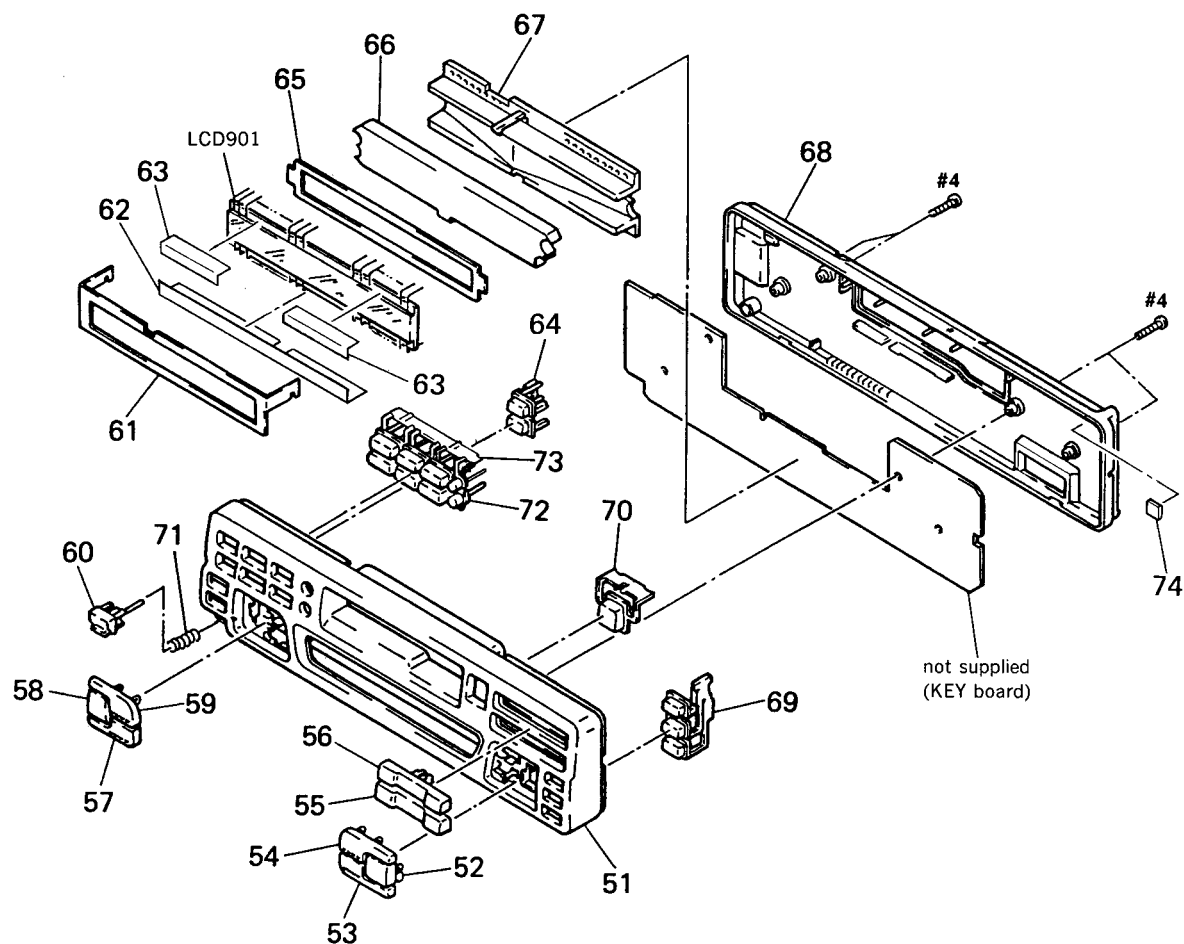

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|------------------------|--------|
| 51 | 3-921-648-51 | PANEL, FRONT (6700RDS) | |
| 51 | 3-932-828-01 | PANEL, FRONT (6600RDS) | |
| 52 | 3-921-916-11 | BUTTON (CD. TAPE) | |
| 53 | 3-921-909-31 | BUTTON (AM) | |
| 54 | 3-921-915-11 | BUTTON (FM) | |
| 55 | 3-921-652-01 | BUTTON (PRESET) | |
| 56 | 3-921-651-01 | BUTTON (SEEK) | |
| 57 | 3-921-911-01 | BUTTON (-) | |
| 58 | 3-921-902-01 | BUTTON (SEL) | |
| 59 | 3-921-910-01 | BUTTON (+) | |
| 60 | 3-918-693-01 | SPRING (RELEASE) | |
| * 61 | 3-921-659-01 | PLATE (LCD), GROUND | |
| * 62 | 3-921-726-02 | SHEET (LCD) (L) | |
| * 63 | 3-921-727-02 | SHEET (LCD) (S) | |

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|-------------------------------|--------|
| 64 | 3-921-903-01 | BUTTON (2 GANG) | |
| * 65 | 3-935-363-01 | SHEET (REFLECTOR) | |
| * 66 | 3-921-656-01 | PLATE, LIGHT GUIDE | |
| * 67 | 3-921-957-01 | HOLDER (LCD) | |
| 68 | 3-921-649-01 | PANEL, FRONT BACK | |
| 69 | 3-921-898-21 | BUTTON (3 GANG) | |
| 70 | 3-921-653-01 | BUTTON (EJECT) | |
| 71 | 3-930-844-01 | BUTTON (RELEASE) | |
| 72 | 3-921-655-01 | BUTTON (4-6) (6700RDS) | |
| 72 | 3-921-655-21 | BUTTON (4-6) (6600RDS) | |
| 73 | 3-921-654-01 | BUTTON (1-3) (6700RDS) | |
| 73 | 3-921-654-11 | BUTTON (1-3) (6600RDS) | |
| 74 | 9-911-841-XX | CUSHION, CASSETTE LID | |
| LCD901 | 1-801-160-11 | DISPLAY PANEL, LIQUID CRYSTAL | |

SECTION 8 ELECTRICAL PARTS LIST

AMPLIFIER

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable

- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u: μ , for example:
uA...: μ A... uPA...: μ PA...
uPB...: μ PB... uPC...: μ PC... uPD...: μ PD...
- CAPACITORS
uF: μ F
- COILS
uH: μ H

When indicating parts by reference number, please include the board.

- Abbreviation
G : German model

| Ref. No. | Part No. | Description | Remark |
|---------------|--------------|-------------------------------------|------------------|
| * | A-3309-056-A | AMPLIFIER BOARD, COMPLETE (6600RDS) | |
| * | A-3309-090-A | AMPLIFIER BOARD, COMPLETE (6700RDS) | |
| ***** | | | |
| | 3-934-043-01 | BRACKET (IC) | |
| | 7-621-770-67 | SCREW +PTT 2.6X6 (S) | |
| < CAPACITOR > | | | |
| C801 | 1-126-157-11 | ELECT 10uF | 20% 16V |
| C802 | 1-126-157-11 | ELECT 10uF | 20% 16V |
| C803 | 1-163-009-11 | CERAMIC CHIP 0.001uF | 10% 50V |
| C804 | 1-163-009-11 | CERAMIC CHIP 0.001uF | 10% 50V |
| C805-808 | 1-136-165-00 | FILM 0.1uF | 5% 50V (6700RDS) |
| C821 | 1-126-157-11 | ELECT 10uF | 20% 16V |
| C822 | 1-126-157-11 | ELECT 10uF | 20% 16V |
| C823 | 1-163-009-11 | CERAMIC CHIP 0.001uF | 10% 50V |
| C824 | 1-163-009-11 | CERAMIC CHIP 0.001uF | 10% 50V |
| C825-828 | 1-136-165-00 | FILM 0.1uF | 5% 50V (6700RDS) |
| C851 | 1-163-243-11 | CERAMIC CHIP 47PF | 5% 50V |
| C852 | 1-126-967-11 | ELECT 47uF | 20% 16V |
| C853 | 1-124-257-00 | ELECT 2.2uF | 20% 50V |
| C854 | 1-164-346-11 | CERAMIC CHIP 1uF | 16V |
| C855 | 1-126-157-11 | ELECT 10uF | 20% 16V |
| C856 | 1-126-157-11 | ELECT 10uF | 20% 16V |
| C857 | 1-136-165-00 | FILM 0.1uF | 5% 50V |
| C859 | 1-124-584-00 | ELECT 100uF | 2% 10V |
| < CONNECTOR > | | | |
| CN801 | 1-774-755-11 | CONNECTOR, BOARD TO BOARD 16P | |
| CN802 | 1-774-810-11 | CONNECTOR, BOARD TO BOARD 12P | |
| < DIODE > | | | |
| D821 | 8-719-988-62 | DIODE 1SS355 | |
| D823 | 8-719-977-24 | DIODE DTZ9.1B | |
| D824 | 8-719-976-88 | DIODE UDZ3.9B | |

| Ref. No. | Part No. | Description | Remark |
|---------------------|--------------|------------------------|----------------|
| < IC > | | | |
| IC801 | 8-759-369-41 | IC HA13155 (6700RDS) | |
| IC801 | 8-759-369-42 | IC HA13153 (6600RDS) | |
| < JUMPER RESISTOR > | | | |
| JC801-803 | 1-216-295-00 | CONDUCTOR, CHIP | (2012) |
| JC851 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| JC854 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| < TRANSISTOR > | | | |
| Q801 | 8-729-920-21 | TRANSISTOR DTC314TKH04 | |
| Q802 | 8-729-920-21 | TRANSISTOR DTC314TKH04 | |
| Q821 | 8-729-920-21 | TRANSISTOR DTC314TKH04 | |
| Q822 | 8-729-920-21 | TRANSISTOR DTC314TKH04 | |
| Q851 | 8-729-921-25 | TRANSISTOR FMC2 | |
| < RESISTOR > | | | |
| R801 | 1-216-053-00 | METAL CHIP 1.5K 5% | 1/10W |
| R802 | 1-216-202-00 | METAL GLAZE 1.5K 5% | 1/8W |
| R805-808 | 1-216-077-00 | METAL CHIP 15K 5% | 1/10W |
| R809 | 1-216-129-00 | METAL CHIP 2.2M 5% | 1/10W |
| R810 | 1-216-129-00 | METAL CHIP 2.2M 5% | 1/10W |
| R811-814 | 1-216-134-00 | METAL CHIP 2.2 5% | 1/8W (6700RDS) |
| R821 | 1-216-053-00 | METAL CHIP 1.5K 5% | 1/10W |
| R822 | 1-216-053-00 | METAL CHIP 1.5K 5% | 1/10W |
| R825-828 | 1-216-077-00 | METAL CHIP 15K 5% | 1/10W |
| R829 | 1-216-129-00 | METAL CHIP 2.2M 5% | 1/10W |
| R830 | 1-216-129-00 | METAL CHIP 2.2M 5% | 1/10W |
| R831-834 | 1-216-134-00 | METAL CHIP 2.2 5% | 1/8W (6700RDS) |
| R851 | 1-216-238-00 | METAL CHIP 47K 5% | 1/8W |
| R852 | 1-216-097-00 | METAL GLAZE 100K 5% | 1/10W |
| R853 | 1-216-166-00 | METAL GLAZE 47 5% | 1/8W |
| R854 | 1-216-073-00 | METAL CHIP 10K 5% | 1/10W |

AMPLIFIER

KEY

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|--|--------|
| R855 | 1-216-049-11 | METAL GLAZE 1K 5% 1/10W | |
| R856 | 1-216-073-00 | METAL CHIP 10K 5% 1/10W | |
| R857 | 1-216-049-11 | METAL GLAZE 1K 5% 1/10W | |
| ***** | | | |
| | | KEY BOARD | |
| | | ***** | |
| * | 3-921-656-01 | PLATE, LIGHT GUIDE | |
| | 3-921-957-01 | HOLDER (LCD) | |
| * | 3-921-659-01 | PLATE (LCD), GROUND | |
| * | 3-921-726-01 | SHEET (LCD) (L) | |
| * | 3-921-727-01 | SHEET (LCD) (S) | |
| * | 3-935-363-01 | SHEET (REFLECTOR) | |
| | | < CAPACITOR > | |
| C901 | 1-163-033-11 | CERAMIC CHIP 0.022uF 50V | |
| C902 | 1-165-319-11 | CERAMIC CHIP 0.1uF 50V | |
| C903 | 1-165-319-11 | CERAMIC CHIP 0.1uF 50V | |
| C904 | 1-163-251-11 | CERAMIC CHIP 100PF 5% 50V | |
| | | < CONNECTOR > | |
| CNP901 | 1-764-423-11 | PIN, CONNECTOR 12P | |
| | | < DIODE > | |
| D901 | 8-719-988-62 | DIODE 1SS355 (6700RDS) | |
| D902 | 8-719-976-99 | DIODE DTZ5.1B | |
| D903 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B (6700RDS) | |
| D904 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |
| D905 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |
| D906 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |
| D907 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |
| | | < IC > | |
| IC901 | 8-759-365-90 | IC LC75824W | |
| | | < JUMPER RESISTOR > | |
| JC901 | 1-216-295-00 | CONDUCTOR, CHIP (2012) (6600RDS) | |
| JC902 | 1-216-295-00 | CONDUCTOR, CHIP (2012) (6700RDS) | |
| | | < LIQUID CRYSTAL DISPLAY > | |
| LCD901 | 1-801-160-11 | DISPLAY PANEL, LIQUID CRYSTAL | |
| | | < SWITCH > | |
| LSW901 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (OFF) (6600RDS:AMBER) | |
| LSW901 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (OFF) (6600RDS:GREEN) | |

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|---|--------|
| LSW901 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (OFF) (6700RDS) | |
| LSW902 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (TUNER) (6600RDS:AMBER) | |
| LSW902 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (TUNER) (6600RDS:GREEN) | |
| LSW902 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (TUNER) (6700RDS) | |
| LSW903 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (AF/TA) (6600RDS:AMBER) | |
| LSW903 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (AF/TA) (6600RDS:GREEN) | |
| LSW903 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (AF/TA) (6700RDS) | |
| LSW905 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (SENS) (6600RDS:AMBER) | |
| LSW905 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (SENS) (6600RDS:GREEN) | |
| LSW905 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (SENS) (6700RDS) | |
| LSW906 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (PTY) (6600RDS:AMBER) | |
| LSW906 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (PTY) (6600RDS:GREEN) | |
| LSW906 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (PTY) (6700RDS) | |
| LSW907 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (D DSPL) (6600RDS:AMBER) | |
| LSW907 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (D DSPL) (6600RDS:GREEN) | |
| LSW907 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (D DSPL) (6700RDS) | |
| LSW908 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (B BTM) (6600RDS:AMBER) | |
| LSW908 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (B BTM) (6600RDS:GREEN) | |
| LSW908 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (B BTM) (6700RDS) | |
| LSW909 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (-) (6600RDS:AMBER) | |
| LSW909 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (-) (6600RDS:GREEN) | |
| LSW909 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (-) (6700RDS) | |
| LSW910 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (SEL) (6600RDS:AMBER) | |
| LSW910 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (SEL) (6600RDS:GREEN) | |
| LSW910 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (SEL) (6700RDS) | |
| LSW911 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (+) (6600RDS:AMBER) | |

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|---|--------|
| LSW911 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (+) (6600RDS:GREEN) | |
| LSW911 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (+) (6700RDS) | |
| LSW912 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (LOUD) (6600RDS:AMBER) | |
| LSW912 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (LOUD) (6600RDS:GREEN) | |
| LSW912 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (LOUD) (6700RDS) | |
| LSW913 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (MUTE) (6600RDS:AMBER) | |
| LSW913 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (MUTE) (6600RDS:GREEN) | |
| LSW913 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (MUTE) (6700RDS) | |
| LSW921 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (▲) (6600RDS:AMBER) | |
| LSW921 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (▲) (6600RDS:GREEN) | |
| LSW921 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (▲) (6700RDS) | |
| LSW922 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (TAPE ◀▶) (6600RDS:AMBER) | |
| LSW922 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (TAPE ◀▶) (6600RDS:GREEN) | |
| LSW922 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (TAPE ◀▶) (6700RDS) | |
| LSW923 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (- ◀◀ (PRESET)) (6600RDS:AMBER) | |
| LSW923 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (- ◀◀ (PRESET)) (6600RDS:GREEN) | |
| LSW923 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (- ◀◀ (PRESET)) (6700RDS) | |
| LSW924 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (+ ▶▶ (PRESET)) (6600RDS:AMBER) | |
| LSW924 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (+ ▶▶ (PRESET)) (6600RDS:GREEN) | |
| LSW924 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (+ ▶▶ (PRESET)) (6700RDS) | |
| LSW925 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (+ ▶▶ (SEEK AMS)) (6600RDS:AMBER) | |
| LSW925 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (+ ▶▶ (SEEK AMS)) (6600RDS:GREEN) | |
| LSW925 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (+ ▶▶ (SEEK AMS)) (6700RDS) | |
| LSW926 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (- ◀◀ (SEEK AMS)) (6600RDS:AMBER) | |
| LSW926 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (- ◀◀ (SEEK AMS)) (6600RDS:GREEN) | |
| LSW926 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (- ◀◀ (SEEK AMS)) (6700RDS) | |

| Ref. No. | Part No. | Description | Remark |
|----------|--------------|--|--------|
| LSW927 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (6 BL. SKIP) (6600RDS:AMBER) | |
| LSW927 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (6 BL. SKIP) (6600RDS:GREEN) | |
| LSW927 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (6 BL. SKIP) (6700RDS) | |
| LSW928 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (5 ATA) (6600RDS:AMBER) | |
| LSW928 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (5 ATA) (6600RDS:GREEN) | |
| LSW928 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (5 ATA) (6700RDS) | |
| LSW929 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (4) (6600RDS:AMBER) | |
| LSW929 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (4) (6600RDS:GREEN) | |
| LSW929 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (4 MTL) (6700RDS) | |
| LSW930 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (1 INTRO) (6600RDS:AMBER) | |
| LSW930 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (1 INTRO) (6600RDS:GREEN) | |
| LSW930 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (1 INTRO) (6700RDS) | |
| LSW931 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (2 REP) (6600RDS:AMBER) | |
| LSW931 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (2 REP) (6600RDS:GREEN) | |
| LSW931 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (2 REP) (6700RDS) | |
| LSW932 | 1-762-141-12 | SWITCH, KEY BOARD (WITH LED) (3) (6600RDS:AMBER) | |
| LSW932 | 1-762-142-12 | SWITCH, KEY BOARD (WITH LED) (3) (6600RDS:GREEN) | |
| LSW932 | 1-762-143-12 | SWITCH, KEY BOARD (WITH LED) (3 ◻◻) (6700RDS) | |

< PILOT LAMP >

| | | |
|-------|--------------|--------------------------------------|
| PL901 | 1-517-407-21 | LAMP, PILOT (6700RDS) |
| PL902 | 1-517-407-21 | LAMP, PILOT (6700RDS) |
| PL903 | 1-517-406-21 | LAMP, PILOT (6700RDS, 6600RDS:AMBER) |
| PL903 | 1-517-407-21 | LAMP, PILOT (6600RDS:GREEN) |
| PL904 | 1-517-406-21 | LAMP, PILOT (6700RDS, 6600RDS:AMBER) |
| PL904 | 1-517-407-21 | LAMP, PILOT (6600RDS:GREEN) |

< TRANSISTOR >

| | | |
|------|--------------|-------------------------------|
| Q901 | 8-729-904-66 | TRANSISTOR DTD113EK (6700RDS) |
| Q902 | 8-729-904-66 | TRANSISTOR DTD113EK (6700RDS) |
| Q903 | 8-729-904-66 | TRANSISTOR DTD113EK (6700RDS) |
| Q904 | 8-729-904-66 | TRANSISTOR DTD113EK (6700RDS) |

KEY

MAIN

| Ref. No. | Part No. | Description | Remark | | |
|--------------|--------------|-------------|--------|----|-----------------------------------|
| < RESISTOR > | | | | | |
| R901-903 | | | | | |
| | 1-216-045-00 | METAL CHIP | 680 | 5% | 1/10W |
| R904 | 1-216-049-11 | METAL GLAZE | 1K | 5% | 1/10W |
| R905 | 1-216-053-00 | METAL CHIP | 1.5K | 5% | 1/10W |
| R906 | 1-216-053-00 | METAL CHIP | 1.5K | 5% | 1/10W |
| R907 | 1-216-057-00 | METAL CHIP | 2.2K | 5% | 1/10W |
| R908 | 1-216-061-00 | METAL CHIP | 3.3K | 5% | 1/10W |
| R909 | 1-216-065-00 | METAL CHIP | 4.7K | 5% | 1/10W |
| R910 | 1-216-069-00 | METAL CHIP | 6.8K | 5% | 1/10W |
| R911 | 1-216-073-00 | METAL CHIP | 10K | 5% | 1/10W |
| R912 | 1-216-077-00 | METAL CHIP | 15K | 5% | 1/10W |
| R921-923 | | | | | |
| | 1-216-045-00 | METAL CHIP | 680 | 5% | 1/10W |
| R924 | 1-216-049-11 | METAL GLAZE | 1K | 5% | 1/10W |
| R925 | 1-216-053-00 | METAL CHIP | 1.5K | 5% | 1/10W |
| R926 | 1-216-053-00 | METAL CHIP | 1.5K | 5% | 1/10W |
| R927 | 1-216-057-00 | METAL CHIP | 2.2K | 5% | 1/10W |
| R928 | 1-216-061-00 | METAL CHIP | 3.3K | 5% | 1/10W |
| R929 | 1-216-065-00 | METAL CHIP | 4.7K | 5% | 1/10W |
| R930 | 1-216-069-00 | METAL CHIP | 6.8K | 5% | 1/10W |
| R931 | 1-216-073-00 | METAL CHIP | 10K | 5% | 1/10W |
| R951 | 1-216-041-00 | METAL CHIP | 470 | 5% | 1/10W |
| R952 | 1-216-109-00 | METAL CHIP | 330K | 5% | 1/10W |
| R953-956 | | | | | |
| | 1-216-049-11 | METAL GLAZE | 1K | 5% | 1/10W |
| R961 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W (6600RDS:GREEN) |
| R961 | 1-216-029-00 | METAL CHIP | 150 | 5% | 1/10W (6700RDS, 6600RDS:AMBER) |
| R962 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W (6700RDS) |
| R963 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6600RDS:GREEN) |
| R963 | 1-216-037-00 | METAL CHIP | 330 | 5% | 1/10W (6700RDS, 6600RDS:AMBER) |
| R964 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6700RDS) |
| R965 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6600RDS:GREEN) |
| R965 | 1-216-037-00 | METAL CHIP | 330 | 5% | 1/10W (6700RDS, 6600RDS:AMBER) |
| R966 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6700RDS) |
| R967 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6600RDS:GREEN) |
| R967 | 1-216-037-00 | METAL CHIP | 330 | 5% | 1/10W (6700RDS, 6600RDS:AMBER) |
| R968 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6700RDS) |

| Ref. No. | Part No. | Description | Remark | | |
|----------|--------------|----------------------|-------------------|----|-----------------------------------|
| R969 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W (6600RDS:GREEN) |
| R969 | 1-216-029-00 | METAL CHIP | 150 | 5% | 1/10W (6700RDS, 6600RDS:AMBER) |
| R970 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W (6700RDS) |
| R971 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6600RDS:GREEN) |
| R971 | 1-216-037-00 | METAL CHIP | 330 | 5% | 1/10W (6700RDS, 6600RDS:AMBER) |
| R972 | 1-216-033-00 | METAL CHIP | 220 | 5% | 1/10W (6700RDS) |
| R973 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W (6600RDS:GREEN) |
| R973 | 1-216-029-00 | METAL CHIP | 150 | 5% | 1/10W (6700RDS, 6600RDS:AMBER) |
| R974 | 1-216-174-00 | METAL GLAZE | 100 | 5% | 1/8W (6700RDS) |
| R975 | 1-216-296-00 | CONDUCTOR, CHIP | | | (3216) (6700RDS) |
| R976 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W (6700RDS) |
| R977 | 1-216-049-11 | METAL GLAZE | 1K | 5% | 1/10W (6700RDS) |
| R978 | 1-216-296-00 | CONDUCTOR, CHIP | | | (3216) |
| ***** | | | | | |
| * | A-3309-081-A | MAIN BOARD, COMPLETE | (6600RDS:G) | | |
| * | A-3309-082-A | MAIN BOARD, COMPLETE | (6600RDS:AEP, UK) | | |
| * | A-3309-088-A | MAIN BOARD, COMPLETE | (6700RDS:AEP, UK) | | |
| * | A-3309-089-A | MAIN BOARD, COMPLETE | (6700RDS:G) | | |

< CAPACITOR >

| | | | | | |
|--------|--------------|--------------|----------|-----|------|
| C1 | 1-163-235-11 | CERAMIC CHIP | 22PF | 5% | 50V |
| C2 | 1-163-133-00 | CERAMIC CHIP | 470PF | 5% | 50V |
| C3-5 | | | | | |
| | 1-124-584-00 | ELECT | 100uF | 20% | 10V |
| C6 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C7 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C9 | 1-164-161-11 | CERAMIC CHIP | 0.0022uF | 10% | 100V |
| C10 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C11 | 1-136-169-00 | FILM | 0.22uF | 5% | 50V |
| C12 | 1-136-165-00 | FILM | 0.1uF | 5% | 50V |
| C13 | 1-137-368-11 | FILM | 0.0047uF | 5% | 50V |
| C14 | 1-137-364-11 | FILM | 0.001uF | 5% | 50V |
| C15 | 1-124-584-00 | ELECT | 100uF | 20% | 10V |
| C16 | 1-136-159-00 | FILM | 0.033uF | 5% | 50V |
| C17 | 1-137-366-11 | FILM | 0.0022uF | 5% | 50V |
| C18-21 | | | | | |
| | 1-163-251-11 | CERAMIC CHIP | 100PF | 5% | 50V |
| C22 | 1-164-222-11 | CERAMIC CHIP | 0.22uF | | 25V |
| C23 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |

| Ref. No. | Part No. | Description | Remark | | |
|----------|--------------|--------------|----------|-----|------|
| C24 | 1-163-237-11 | CERAMIC CHIP | 27PF | 5% | 50V |
| C25 | 1-163-104-00 | CERAMIC CHIP | 30PF | 5% | 50V |
| C26 | 1-163-127-00 | CERAMIC CHIP | 270PF | 5% | 50V |
| C27 | 1-163-009-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C28 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C29 | 1-163-031-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C30 | 1-163-237-11 | CERAMIC CHIP | 27PF | 5% | 50V |
| C31 | 1-163-237-11 | CERAMIC CHIP | 27PF | 5% | 50V |
| C32 | 1-126-301-11 | ELECT | 1uF | 20% | 50V |
| C35 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C101 | 1-163-037-11 | CERAMIC CHIP | 0.022uF | 10% | 25V |
| C102 | 1-126-301-11 | ELECT | 1uF | 20% | 50V |
| C103 | 1-165-320-11 | CERAMIC CHIP | 0.47uF | 10% | 16V |
| C111 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C112 | 1-163-009-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C113 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C114 | 1-164-161-11 | CERAMIC CHIP | 0.0022uF | 10% | 100V |
| C115 | 1-163-037-11 | CERAMIC CHIP | 0.022uF | 10% | 25V |
| C116 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C118 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C119 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C122 | 1-163-251-11 | CERAMIC CHIP | 100PF | 5% | 50V |
| C151 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C152 | 1-163-809-11 | CERAMIC CHIP | 0.047uF | 10% | 25V |
| C153 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C155 | 1-124-234-00 | ELECT | 22uF | 20% | 16V |
| C157 | 1-124-584-00 | ELECT | 100uF | 20% | 10V |
| C158 | 1-163-031-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C201 | 1-163-037-11 | CERAMIC CHIP | 0.022uF | 10% | 25V |
| C202 | 1-126-301-11 | ELECT | 1uF | 20% | 50V |
| C203 | 1-107-823-11 | CERAMIC CHIP | 0.47uF | 10% | 16V |
| C211 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C212 | 1-163-009-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C213 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C214 | 1-164-161-11 | CERAMIC CHIP | 0.0022uF | 10% | 100V |
| C215 | 1-163-037-11 | CERAMIC CHIP | 0.022uF | 10% | 25V |
| C216 | 1-163-077-00 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C218 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C219 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C222 | 1-163-251-11 | CERAMIC CHIP | 100PF | 5% | 50V |
| C301 | 1-163-009-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C302 | 1-163-125-00 | CERAMIC CHIP | 220PF | 5% | 50V |
| C303 | 1-163-125-00 | CERAMIC CHIP | 220PF | 5% | 50V |
| C304 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C305 | 1-164-489-11 | CERAMIC CHIP | 0.22uF | 10% | 16V |
| C306 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |

(6700RDS)

(6700RDS)

| Ref. No. | Part No. | Description | Remark | | |
|----------|--------------|--------------|---------|-----|------|
| C308 | 1-124-463-00 | ELECT | 0.1uF | 20% | 50V |
| C309 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C350 | 1-124-234-00 | ELECT | 22uF | 20% | 16V |
| C351 | 1-163-251-11 | CERAMIC CHIP | 100PF | 5% | 50V |
| C353 | 1-124-465-00 | ELECT | 0.47uF | 20% | 50V |
| C354 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C356 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C357 | 1-124-584-00 | ELECT | 100uF | 20% | 10V |
| C362 | 1-165-319-11 | CERAMIC CHIP | 0.1uF | | 50V |
| C363 | 1-165-319-11 | CERAMIC CHIP | 0.1uF | | 50V |
| C364 | 1-164-222-11 | CERAMIC CHIP | 0.22uF | | 25V |
| C365 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C366 | 1-124-234-00 | ELECT | 22uF | 20% | 16V |
| C367 | 1-124-120-11 | ELECT | 220uF | 20% | 25V |
| C401 | 1-163-009-11 | CERAMIC CHIP | 0.001uF | 10% | 50V |
| C402 | 1-163-125-00 | CERAMIC CHIP | 220PF | 5% | 50V |
| C403 | 1-163-125-00 | CERAMIC CHIP | 220PF | 5% | 50V |
| C404 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C405 | 1-164-489-11 | CERAMIC CHIP | 0.22uF | 10% | 16V |
| C406 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C408 | 1-124-463-00 | ELECT | 0.1uF | 20% | 50V |
| C409 | 1-164-004-11 | CERAMIC CHIP | 0.1uF | 10% | 25V |
| C501 | 1-124-584-00 | ELECT | 100uF | 20% | 10V |
| C502 | 1-164-505-11 | CERAMIC CHIP | 2.2uF | | 16V |
| C503 | 1-163-099-00 | CERAMIC CHIP | 18PF | 5% | 50V |
| C504 | 1-163-235-11 | CERAMIC CHIP | 22PF | 5% | 50V |
| C505 | 1-165-319-11 | CERAMIC CHIP | 0.1uF | | 50V |
| C506 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C507 | 1-164-346-11 | CERAMIC CHIP | 1uF | | 16V |
| C509 | 1-163-059-00 | CERAMIC CHIP | 0.01uF | 10% | 50V |
| C601 | 1-163-081-00 | CERAMIC CHIP | 0.22uF | | 25V |
| C603 | 1-125-705-11 | CAPACITOR | 0.22F | | 5.5V |
| C604 | 1-124-443-00 | ELECT | 100uF | 20% | 10V |
| C605 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C606 | 1-124-234-00 | ELECT | 22uF | 20% | 16V |
| C607 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C608 | 1-126-967-11 | ELECT | 47uF | 20% | 16V |
| C609 | 1-126-967-11 | ELECT | 47uF | 20% | 16V |
| C610 | 1-124-234-00 | ELECT | 22uF | 20% | 16V |
| C612 | 1-126-301-11 | ELECT | 1uF | 20% | 50V |
| C613 | 1-164-232-11 | CERAMIC CHIP | 0.01uF | | 50V |
| C614 | 1-163-117-00 | CERAMIC CHIP | 100PF | 5% | 50V |
| C615 | 1-163-117-00 | CERAMIC CHIP | 100PF | 5% | 50V |
| C616 | 1-165-319-11 | CERAMIC CHIP | 0.1uF | | 50V |
| C617 | 1-126-157-11 | ELECT | 10uF | 20% | 16V |
| C619 | 1-165-319-11 | CERAMIC CHIP | 0.1uF | | 50V |
| C650 | 1-126-936-11 | ELECT | 3300uF | 20% | 16V |

(6700RDS)

MAIN

| Ref. No. | Part No. | Description | Remark |
|-------------------|--------------|-----------------------------------|--------|
| < JACK > | | | |
| CN150 | 1-774-698-11 | JACK, PIN 2P (LINE OUT) (6700RDS) | |
| < CONNECTOR > | | | |
| CN351 | 1-766-260-11 | CONNECTOR, FFC/FPC (ZIF) 7P | |
| * CN352 | 1-506-995-11 | PIN, CONNECTOR (PC BOARD) 13P | |
| CN602 | 1-764-422-11 | PLUG, CONNECTOR 12P | |
| * CN603 | 1-770-212-11 | CONNECTOR, BOARD TO BOARD 16P | |
| CN604 | 1-774-809-11 | CONNECTOR, BOARD TO BOARD 12P | |
| CN605 | 1-774-701-11 | PIN, CONNECTOR 16P | |
| < DISCHARGE GAP > | | | |
| CP1 | 1-519-504-11 | GAP, DISCHARGE | |
| < DIODE > | | | |
| D2 | 8-719-991-65 | DIODE SB02W03C | |
| D3 | 8-719-977-27 | DIODE DTZ10A | |
| D350 | 8-719-988-62 | DIODE 1SS355 | |
| D361 | 8-719-977-27 | DIODE DTZ10A | |
| D362 | 8-719-988-62 | DIODE 1SS355 | |
| D501 | 8-719-976-88 | DIODE UDZ3.9B | |
| D504 | 8-719-988-62 | DIODE 1SS355 | |
| D505 | 8-719-988-62 | DIODE 1SS355 | |
| D506 | 8-719-988-62 | DIODE 1SS355 | |
| D601 | 8-719-978-50 | DIODE DTZ-TT11-10C | |
| D605 | 8-719-977-03 | DIODE DTZ5.6B | |
| D606 | 8-719-977-17 | DIODE DTZ7.5C | |
| D607 | 8-719-914-43 | DIODE DAN202K | |
| D609 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D610 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D611 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D612 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D613 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D614 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D615 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |
| D616 | 8-719-923-93 | DIODE MTZJ-T-77-16C | |
| D617 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |
| D618 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D619 | 8-719-109-97 | DIODE RD6.8ES-B2 | |
| D620 | 8-719-200-82 | DIODE 11ES2 | |
| D621 | 8-719-200-82 | DIODE 11ES2 | |
| D622 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |
| D624 | 8-719-988-62 | DIODE 1SS355 | |
| D650 | 8-719-049-38 | DIODE 1N5404TU | |
| D651 | 8-719-977-69 | DIODE DTZ24B | |
| D652 | 8-719-977-69 | DIODE DTZ24B | |
| D653 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | |

| Ref. No. | Part No. | Description | Remark |
|---------------------|--------------|--------------------------|------------------|
| D701 | 8-719-923-93 | DIODE MTZJ-T-77-16C | |
| D702 | 8-719-977-17 | DIODE DTZ7.5C | |
| < IC > | | | |
| IC1 | 8-759-242-66 | IC TC4W66F | |
| IC2 | 8-759-823-81 | IC LC7216M | |
| IC3 | 8-759-163-63 | IC TDA7330BD-013TR | |
| IC151 | 8-759-368-11 | IC LC75372E | |
| IC152 | 8-759-909-71 | IC BA4558F | |
| IC351 | 8-752-075-58 | IC CXA2510Q-T4 (6700RDS) | |
| IC351 | 8-752-076-05 | IC CXA2509Q-T4 (6600RDS) | |
| IC360 | 8-759-823-87 | IC LB1638M | |
| IC501 | 8-759-372-63 | IC MN1884820S3T | |
| IC571 | 8-759-363-81 | IC XC61AN4002PR | |
| IC601 | 8-759-347-50 | IC BA3918-V3 | |
| < JACK > | | | |
| J1 | 1-770-279-11 | JACK (ISO) (ANTENNA) | |
| J501 | 1-566-822-41 | JACK (REMOTE IN) | |
| < JUMPER RESISTOR > | | | |
| JC2-6 | 1-216-295-00 | CONDUCTOR, CHIP | (2012) |
| JC9-18 | 1-216-295-00 | CONDUCTOR, CHIP | (2012) |
| JC351 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) (6600RDS) |
| JC354 | 1-216-295-00 | CONDUCTOR, CHIP | (2012) |
| JC501 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| JC502 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| JC504-513 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| JC515-517 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| JC519-523 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| JC525-534 | 1-216-296-00 | CONDUCTOR, CHIP | (3216) |
| < COIL > | | | |
| L4 | 1-410-971-31 | INDUCTOR 10uH | |
| L501 | 1-410-971-31 | INDUCTOR 10uH | |
| L601 | 1-411-669-11 | COIL, CHOKE | |
| < TRANSISTOR > | | | |
| Q2 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | |
| Q3 | 8-729-021-94 | TRANSISTOR 2SK1657-T1B | |
| Q4 | 8-729-900-53 | TRANSISTOR DTC114EK | |
| Q101 | 8-729-920-21 | TRANSISTOR DTC314TKH04 | |
| Q201 | 8-729-920-21 | TRANSISTOR DTC314TKH04 | |

| Ref. No. | Part No. | Description | Remark | | |
|--------------|--------------|-------------|----------------|-----------|-----------|
| Q361 | 8-729-922-65 | TRANSISTOR | 2SD1760F5-PQR | | |
| Q362 | 8-729-920-41 | TRANSISTOR | FMC3 | | |
| Q364 | 8-729-106-60 | TRANSISTOR | 2SB1115A | | |
| Q365 | 8-729-900-53 | TRANSISTOR | DTC114EK | | |
| Q501 | 8-729-921-25 | TRANSISTOR | FMC2 | | |
| Q503 | 8-729-120-28 | TRANSISTOR | 2SC1623-L5L6 | | |
| Q603 | 8-729-030-18 | TRANSISTOR | 2SD2525 | | |
| Q605 | 8-729-921-25 | TRANSISTOR | FMC2 | | |
| Q606 | 8-729-027-23 | TRANSISTOR | DTA114EKA-T146 | | |
| Q607 | 8-729-030-18 | TRANSISTOR | 2SD2525 | | |
| Q608 | 8-729-027-23 | TRANSISTOR | DTA114EKA-T146 | | |
| Q609 | 8-729-922-65 | TRANSISTOR | 2SD1760F5-PQR | | |
| Q610 | 8-729-120-28 | TRANSISTOR | 2SC1623-L5L6 | | |
| Q611 | 8-729-120-28 | TRANSISTOR | 2SC1623-L5L6 | | |
| Q612 | 8-729-120-28 | TRANSISTOR | 2SC1623-L5L6 | | |
| Q701 | 8-729-900-53 | TRANSISTOR | DTC114EK | | |
| Q702 | 8-729-921-25 | TRANSISTOR | FMC2 | | |
| < RESISTOR > | | | | | |
| R1 | 1-216-049-11 | METAL GLAZE | 1K 5% | 1/10W | |
| R2 | 1-216-061-00 | METAL CHIP | 3.3K 5% | 1/10W | |
| R3 | 1-216-073-00 | METAL CHIP | 10K 5% | 1/10W | |
| R4 | 1-216-097-00 | METAL GLAZE | 100K 5% | 1/10W | |
| R5 | 1-216-037-00 | METAL CHIP | 330 5% | 1/10W | |
| R6 | 1-216-065-00 | METAL CHIP | 4.7K 5% | 1/10W | |
| R7 | 1-216-073-00 | METAL CHIP | 10K 5% | 1/10W | |
| R8 | 1-216-238-00 | METAL GLAZE | 47K 5% | 1/8W | |
| R9 | 1-216-057-00 | METAL CHIP | 2.2K 5% | 1/10W | |
| R10 | 1-216-049-11 | METAL GLAZE | 1K 5% | 1/10W | |
| R11 | 1-216-075-00 | METAL CHIP | 12K 5% | 1/10W | |
| R12 | 1-216-238-00 | METAL GLAZE | 47K 5% | 1/8W | |
| R13 | 1-216-057-00 | METAL CHIP | 2.2K 5% | 1/10W | |
| R14 | 1-216-057-00 | METAL CHIP | 2.2K 5% | 1/10W | |
| R15 | 1-216-073-00 | METAL CHIP | 10K 5% | 1/10W | |
| R16 | 1-216-057-00 | METAL CHIP | 2.2K 5% | 1/10W | |
| R17 | 1-216-129-00 | METAL CHIP | 2.2M 5% | 1/10W | |
| R19 | 1-216-073-00 | METAL CHIP | 10K 5% | 1/10W | |
| R101 | 1-216-065-00 | METAL CHIP | 4.7K 5% | 1/10W (G) | |
| R101 | 1-216-073-00 | METAL CHIP | 10K 5% | 1/10W | (AEP, UK) |
| R102 | 1-216-079-00 | METAL CHIP | 18K 5% | 1/10W | (AEP, UK) |
| R102 | 1-216-085-00 | METAL CHIP | 33K 5% | 1/10W (G) | |
| R103 | 1-216-077-00 | METAL CHIP | 15K 5% | 1/10W | |
| R104 | 1-216-085-00 | METAL CHIP | 33K 5% | 1/10W | |
| R108 | 1-216-230-00 | METAL GLAZE | 22K 5% | 1/8W | |
| R109 | 1-216-085-00 | METAL CHIP | 33K 5% | 1/10W | |
| R151 | 1-216-069-00 | METAL CHIP | 6.8K 5% | 1/10W | |
| R152 | 1-216-065-00 | METAL CHIP | 4.7K 5% | 1/10W | |

| Ref. No. | Part No. | Description | Remark | | |
|----------|--------------|-------------|---------|-----------|-----------|
| R201 | 1-216-065-00 | METAL CHIP | 4.7K 5% | 1/10W (G) | |
| R201 | 1-216-073-00 | METAL CHIP | 10K 5% | 1/10W | (AEP, UK) |
| R202 | 1-216-079-00 | METAL CHIP | 18K 5% | 1/10W | (AEP, UK) |
| R202 | 1-216-085-00 | METAL CHIP | 33K 5% | 1/10W (G) | |
| R203 | 1-216-226-00 | METAL GLAZE | 15K 5% | 1/8W | |
| R204 | 1-216-085-00 | METAL CHIP | 33K 5% | 1/10W | |
| R208 | 1-216-230-00 | METAL GLAZE | 22K 5% | 1/8W | |
| R209 | 1-216-085-00 | METAL CHIP | 33K 5% | 1/10W | |
| R303 | 1-216-076-00 | METAL CHIP | 13K 5% | 1/10W | |
| R304 | 1-216-077-00 | METAL CHIP | 15K 5% | 1/10W | (6700RDS) |
| R305 | 1-216-258-00 | METAL CHIP | 330K 5% | 1/8W | |
| R306 | 1-216-041-00 | METAL CHIP | 470 5% | 1/10W | (6600RDS) |
| R307 | 1-216-069-00 | METAL CHIP | 6.8K 5% | 1/10W | |
| R308 | 1-216-079-00 | METAL CHIP | 18K 5% | 1/10W | |
| R351 | 1-208-812-11 | METAL GLAZE | 18K 2% | 1/10W | |
| R352 | 1-216-109-00 | METAL CHIP | 330K 5% | 1/10W | |
| R353 | 1-216-065-00 | METAL CHIP | 4.7K 5% | 1/10W | |
| R354 | 1-216-077-00 | METAL CHIP | 15K 5% | 1/10W | |
| R355 | 1-216-009-00 | METAL GLAZE | 22 5% | 1/10W | |
| R361 | 1-216-049-11 | METAL GLAZE | 1K 5% | 1/10W | |
| R362 | 1-249-389-11 | CARBON | 4.7 5% | 1/4W | |
| R363 | 1-249-389-11 | CARBON | 4.7 5% | 1/4W | |
| R364 | 1-216-222-00 | METAL GLAZE | 10K 5% | 1/8W | |
| R365 | 1-216-214-00 | METAL GLAZE | 4.7K 5% | 1/8W | |
| R403 | 1-216-076-00 | METAL CHIP | 13K 5% | 1/10W | |
| R404 | 1-216-077-00 | METAL CHIP | 15K 5% | 1/10W | (6700RDS) |
| R405 | 1-216-109-00 | METAL CHIP | 330K 5% | 1/10W | |
| R406 | 1-216-041-00 | METAL CHIP | 470 5% | 1/10W | (6600RDS) |
| R407 | 1-216-069-00 | METAL CHIP | 6.8K 5% | 1/10W | |
| R408 | 1-216-079-00 | METAL CHIP | 18K 5% | 1/10W | |
| R505 | 1-216-049-11 | METAL GLAZE | 1K 5% | 1/10W | |
| R506 | 1-216-109-00 | METAL CHIP | 330K 5% | 1/10W | |
| R507 | 1-216-049-11 | METAL GLAZE | 1K 5% | 1/10W | |
| R508 | 1-216-057-00 | METAL CHIP | 2.2K 5% | 1/10W | |
| R509 | 1-216-049-11 | METAL GLAZE | 1K 5% | 1/10W | |
| R510-512 | 1-216-097-00 | METAL GLAZE | 100K 5% | 1/10W | |
| R513 | 1-216-246-00 | METAL GLAZE | 100K 5% | 1/8W | |
| R514 | 1-216-198-00 | METAL GLAZE | 1K 5% | 1/8W | |
| R515-517 | 1-216-049-11 | METAL GLAZE | 1K 5% | 1/10W | |
| R518 | 1-216-246-00 | METAL GLAZE | 100K 5% | 1/8W | |
| R521 | 1-216-246-00 | METAL GLAZE | 100K 5% | 1/8W | |

MAIN

| Ref.No. | Part No. | Description | Remark | | |
|----------|--------------|-----------------|--------|-------|--------------------|
| R522-528 | | | | | |
| | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W |
| R531 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W (6600RDS) |
| R532 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W (6700RDS) |
| R533 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W (6700RDS) |
| R534 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W (6600RDS) |
| R536 | 1-216-295-00 | CONDUCTOR, CHIP | | | (2012) |
| R537 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W (6700RDS) |
| R538 | 1-216-085-00 | METAL CHIP | 33K | 5% | 1/10W (6700RDS) |
| R538 | 1-216-295-00 | CONDUCTOR, CHIP | | | (2012) (6600RDS) |
| R540 | 1-216-295-00 | CONDUCTOR, CHIP | | | (2012) |
| R542 | 1-216-295-00 | CONDUCTOR, CHIP | | | (2012) |
| R543 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W |
| R544 | 1-216-049-11 | METAL GLAZE | 1K | 5% | 1/10W |
| R548 | 1-216-073-00 | METAL CHIP | 10K | 5% | 1/10W |
| R549 | 1-216-073-00 | METAL CHIP | 10K | 5% | 1/10W |
| R550 | 1-216-073-00 | METAL CHIP | 100K | 5% | 1/10W (6700RDS) |
| R551 | 1-216-222-00 | METAL GLAZE | 10K | 5% | 1/8W |
| R552 | 1-216-073-00 | METAL CHIP | 10K | 5% | 1/10W (6700RDS) |
| R601 | 1-216-057-00 | METAL CHIP | 2.2K | 5% | 1/10W |
| R602 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W |
| R603 | 1-216-085-00 | METAL CHIP | 33K | 5% | 1/10W |
| R604 | 1-216-089-00 | METAL GLAZE | 47K | 5% | 1/10W |
| R605 | 1-216-089-00 | METAL GLAZE | 47K | 5% | 1/10W |
| R606 | 1-216-206-00 | METAL GLAZE | 2.2K | 5% | 1/8W |
| R607 | 1-216-073-00 | METAL CHIP | 10K | 5% | 1/10W |
| R608 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W |
| R609 | 1-216-186-00 | METAL GLAZE | 330 | 5% | 1/8W |
| R610 | 1-249-385-11 | CARBON | 2.2 | 5% | 1/6W |
| R611 | 1-249-385-11 | CARBON | 2.2 | 5% | 1/6W |
| R612 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W |
| R613 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W |
| R614 | 1-208-806-11 | METAL CHIP | 10K | 0.50% | 1/10W |
| R615 | 1-208-806-11 | METAL CHIP | 10K | 0.50% | 1/10W |
| R616 | 1-216-057-00 | METAL CHIP | 2.2K | 5% | 1/10W |
| R617 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W |
| R618 | 1-208-806-11 | METAL CHIP | 10K | 0.50% | 1/10W |
| R619 | 1-208-510-61 | METAL GLAZE | 10K | 2% | 1/8W |
| R620 | 1-216-025-00 | METAL GLAZE | 100 | 5% | 1/10W |
| R621 | 1-216-097-00 | METAL CHIP | 100K | 5% | 1/10W |
| R622 | 1-216-097-00 | METAL GLAZE | 100K | 5% | 1/10W |
| R623 | 1-216-174-00 | METAL CHIP | 100 | 5% | 1/8W |

| Ref.No. | Part No. | Description | Remark | | |
|---------|--------------|------------------------------|--------------------------|-----------|-------|
| R702 | 1-216-113-00 | METAL CHIP | 470K | 5% | 1/10W |
| R703 | 1-216-073-00 | METAL CHIP | 10K | 5% | 1/10W |
| | | < VARIABLE RESISTOR > | | | |
| RV1 | 1-241-768-11 | RES, ADJ, CARBON | 220K | | |
| RV301 | 1-238-597-11 | RES, ADJ, CARBON | 1K | (6700RDS) | |
| RV401 | 1-238-597-11 | RES, ADJ, CARBON | 1K | (6700RDS) | |
| | | < SWITCH > | | | |
| S501 | 1-571-478-11 | SWITCH, SLIDE (POWER SELECT) | | | |
| S601 | 1-692-431-21 | SWITCH, TACTILE (RESET) | | | |
| | | < TUNER UNIT > | | | |
| TU1 | A-3282-012-A | TUNER UNIT (TUX-006) | | | |
| | | < VIBRATOR > | | | |
| X1 | 1-567-848-11 | VIBRATOR, CRYSTAL | (7.2MHz) | | |
| X2 | 1-579-242-41 | VIBRATOR, CRYSTAL | (4.332MHz) | | |
| X501 | 1-579-952-21 | VIBRATOR, CERAMIC | (8MHz) | | |
| X502 | 1-567-098-41 | VIBRATOR, CRYSTAL | (32.768kHz) | | |
| ***** | | | | | |
| | | MISCELLANEOUS | | | |
| | | ***** | | | |
| 10 | 1-776-527-31 | CORD (WITH CONNECTOR) | (ISO) | | |
| 130 | 1-765-460-12 | CORD (WITH CONNECTOR) | | | |
| F601 | 1-533-331-11 | FUSE (BLADE TYPE) | (AUTO FUSE) | (15A) | |
| HP901 | 1-500-196-21 | HEAD, MAGNETIC | (PLAYBACK) | | |
| M901 | X-3368-684-1 | MOTOR ASSY, MAIN | (CAPSTAN/REEL) | | |
| M902 | X-3368-685-1 | MOTOR ASSY, SUB | (LOADING/TAPE OPERATION) | | |
| S901 | 1-692-885-11 | SWITCH, ROTARY SLIDE | (TAPE OPERATION) | | |
| ***** | | | | | |

| Ref.No. | Part No. | Description | Remark |
|---------------------------------|--------------|---|--------|
| ACCESSORIES & PACKING MATERIALS | | | |
| ***** | | | |
| | 3-810-046-11 | MANUAL, INSTRUCTION (ENGLISH, FRENCH, GERMAN, ITALIAN) (6700RDS:G) | |
| | 3-810-046-21 | MANUAL, INSTRUCTION (SPANISH, DUTCH, SWEDISH, PORTUGUESE) (6700RDS:AEP, UK) | |
| | 3-810-054-11 | MANUAL, INSTRUCTION, INSTALL (ENGLISH, FRENCH, GERMAN, ITALIAN) (6600RDS/6700RDS:G) | |
| | 3-810-054-21 | MANUAL, INSTRUCTION, INSTALL (SPANISH, DUTCH, SWEDISH, PORTUGUESE) (AEP, UK) | |
| | 3-810-634-11 | MANUAL, INSTRUCTION (ENGLISH, FRENCH, GERMAN, ITALIAN) (6600RDS:G) | |
| | 3-810-634-21 | MANUAL, INSTRUCTION (SPANISH, DUTCH, SWEDISH, PORTUGUESE) (6600RDS:AEP, UK) | |
| | X-3367-795-1 | CASE ASSY | |

| | | | |
|---------------|--------------|-------------------------------|--|
| ***** | | | |
| ***** | | | |
| HARDWARE LIST | | | |
| ***** | | | |
| #1 | 7-621-770-67 | SCREW +PTT 2. 6X6 (S) | |
| #2 | 7-621-770-XX | SCREW +PTT 2. 6X8 (S) | |
| #3 | 7-685-106-19 | SCREW +P 2X10 TYPE2 NON-SLIT | |
| #4 | 7-627-553-17 | PRECISION SCREW +P 2X2 TYPE 3 | |
| #5 | 7-628-253-00 | SCREW +PS 2X4 | |
| #6 | 7-624-104-04 | STOP RING 2. 0, TYPE -E | |
| #7 | 7-621-772-10 | SCREW +B 2X4 | |
| ***** | | | |

| Ref.No. | Part No. | Description | Remark |
|-------------------|--------------|--------------------------------|--------|
| MOUNTING HARDWARE | | | |
| ***** | | | |
| * 151 | 3-916-161-01 | FRAME, FITTING | |
| 152 | 3-386-828-01 | SCREW, FITTING | |
| 153 | 3-349-410-01 | BUSHING | |
| 154 | 3-388-078-01 | KEY | |
| 155 | X-3370-077-1 | SCREW ASSY (AE. KEY), FITTING | |
| 156 | 1-776-527-31 | CORD (WITH CONNECTOR) (ISO) | |
| 157 | 1-575-616-21 | CORD (WITH TERMINAL) (6700RDS) | |

